



## HDX-73F-PU

Dakota Digital HDX Instrument Installation For 1973-'79 Ford Pickups, 1978-'79 Ford Broncos

Your new HDX-73F-PU kit includes:

**HDX Display** 



Universal Sender Pack

Buzzer

**Installation Manuals** 












**Main Harness** 


**Control Box** 

## Installation


1a. First, you will need to remove the stock gauge cluster. To do so, remove the LIGHTS and WIPER knobs as well as the four (4) Phillips screws on the top edge of the bezel as indicated in the photo. Also, disconnect the wiring and speedometer cable on the back side of the gauge cluster. Retain hardware for reassembly.

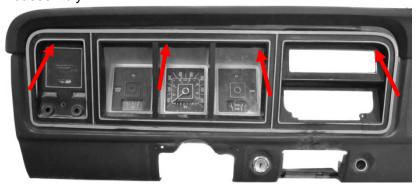

1b. Finally, remove the four (4) mounting screws holding the cluster to the dash. Retain these screws for reassembly.

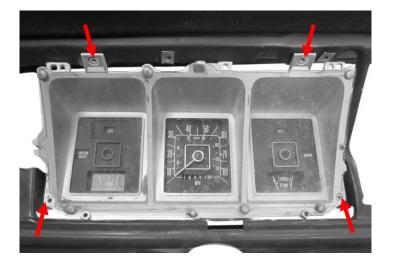


2. Mount the HDX system to the dash using the stock screws. Make sure to partially thread all screws before final torqueing to ensure proper alignment for all mounting points.

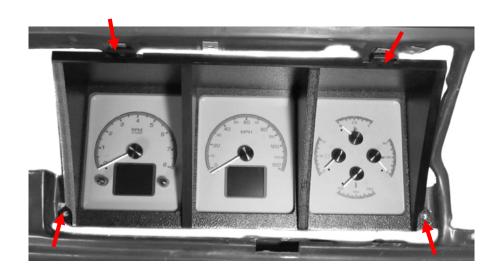

3. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.



4. Refer to the main manual for wiring instructions and re-install the stock bezel in reverse order using all stock hardware to complete the HDX installation.

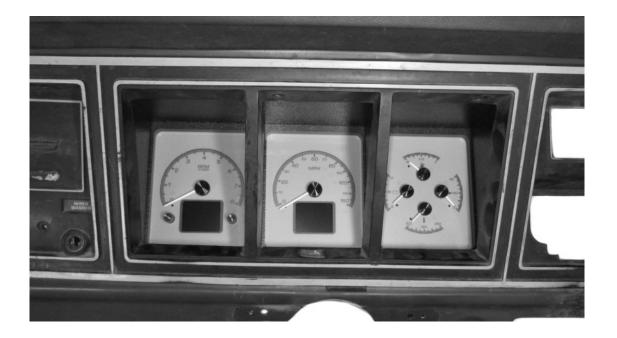

**AWARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="https://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>



4510 W. 61st St. North Sioux Falls, SD 57107

www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2018 - Dakota Digital