


VHX-55C-PU

Dakota Digital VHX Instrument Installation For '55 thru '59 Chevy Pickup systems

Your new VHX-55C-PU kit should include:

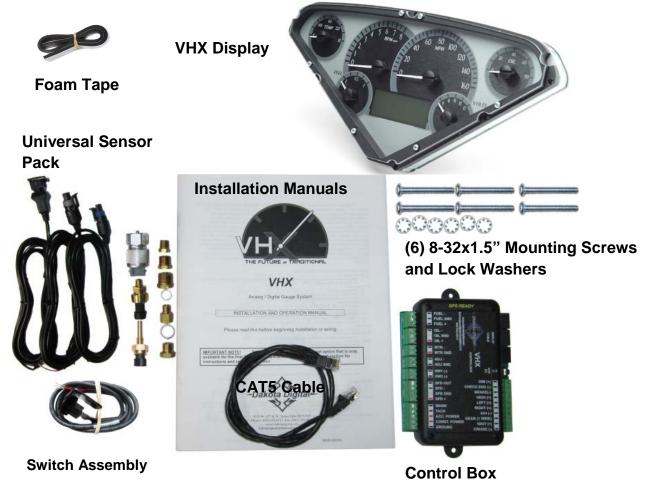


Installation

1. Remove the stock instrument cluster from the truck.



Manual # 650329A

2. Remove the six screws holding the gauges to the bezel on the back of the system.

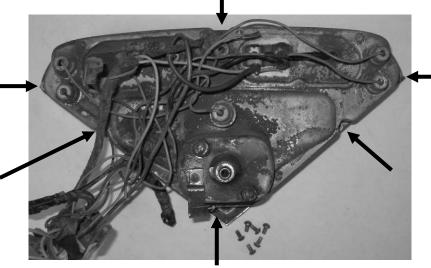



 Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original chrome bezel; the other pieces can be discarded. Now is a good time to clean the bezel and

remove any dirt or old lens gasket material.




4. Next, cut the supplied foam into 1.5" long strips, and then cut the strips in half lengthwise so you have four pieces total. Install the foam blocks on top of the four bosses around the edge of the bezel to help prevent any lens rattles. The foam will compress against the lens once the system is installed.




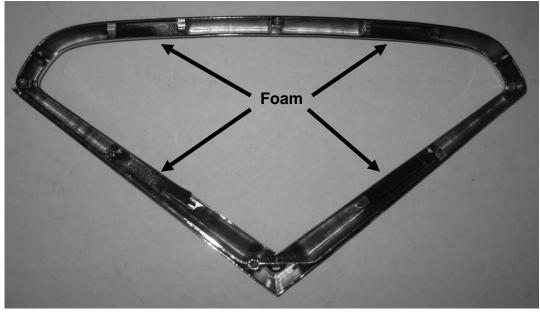

5. Remove the protective tape from the clear lens and install the VHX system into the bezel. Watch carefully as you insert the system so you don't scratch or damage the lens. The VHX system should align tightly and the lens should fit flush with the bezel.

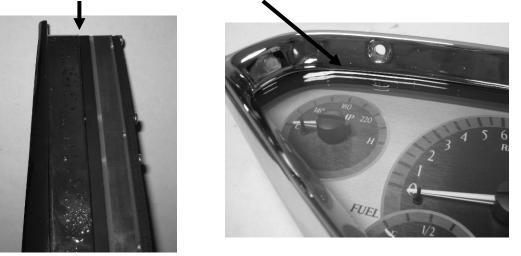

6. Secure the VHX system to the bezel with the six 8-32 x 1.5" screws and lock washers provided.

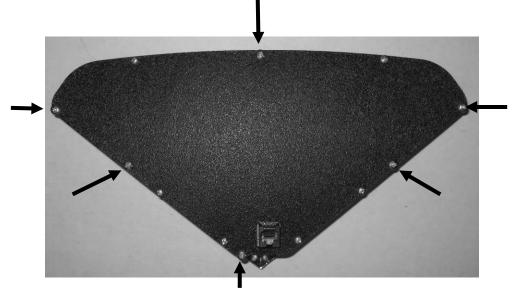

7. Connect the CAT5 cable to the system so it can be routed and connected to the control box as the system is re-installed.



8. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the VHX installation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.