




### VHX-66F-FAR

Dakota Digital VHX Instrument Installation  
For 1966-'67 Ford Fairlane

Your new VHX-66F-FAR kit includes:

#### VHX Display

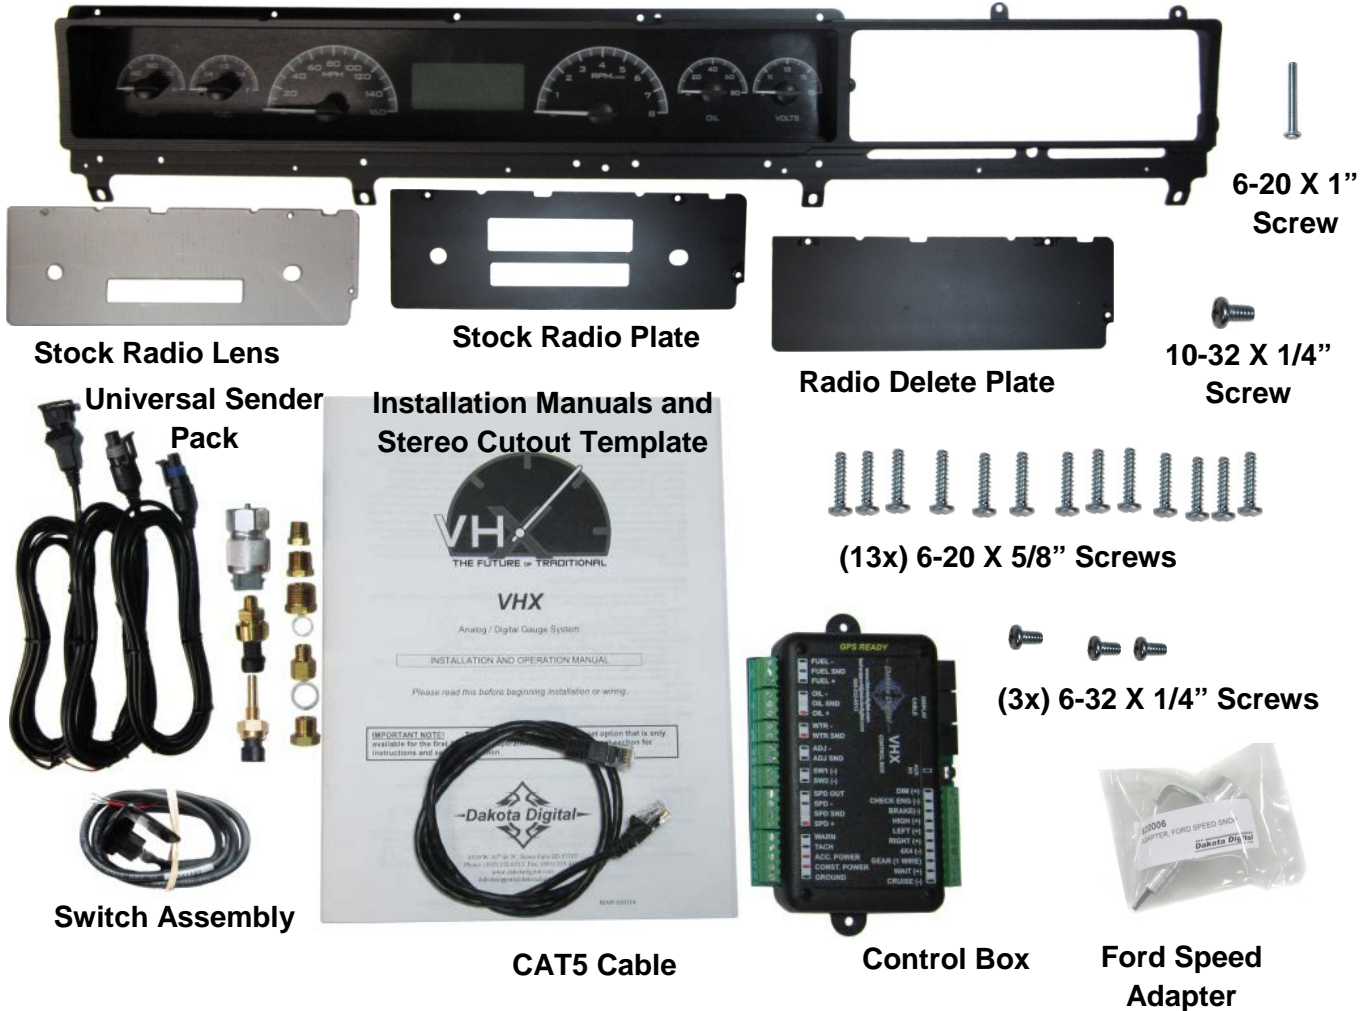


### Installation

1. Remove the gauge bezel from the dash and save all hardware for reassembly.




2. Remove the stock gauge cluster and gauge panel from the bezel, so you are left with a bare bezel as shown below. These screws are not reused.

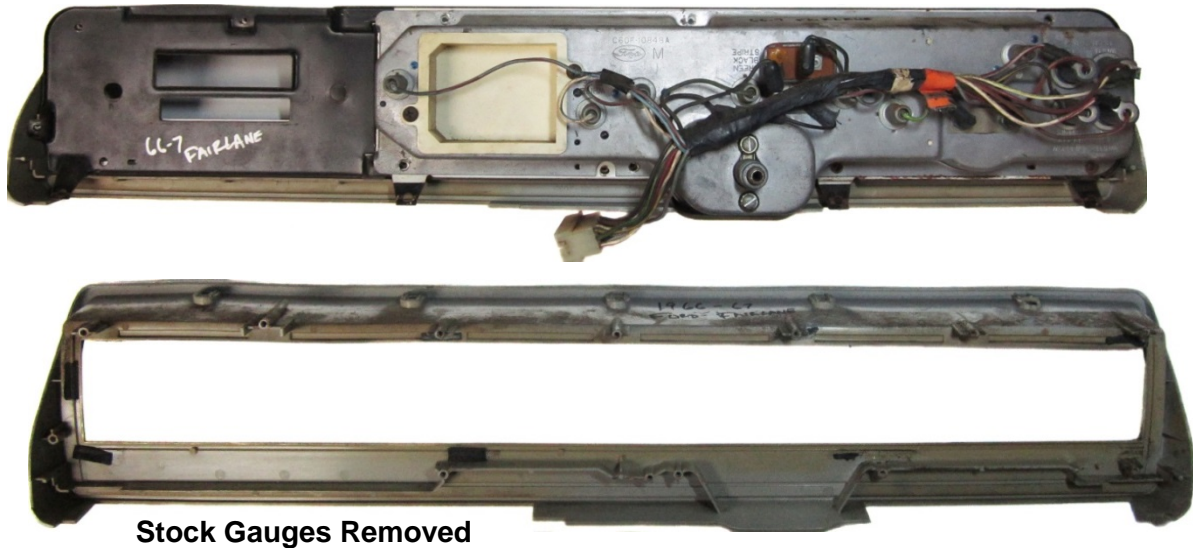

3. This VHX system has options for the stock radio location, however **the supplied stock radio lens must be used for all options to allow proper spacing for the three (3) supplied 6-32 X 1/4" screws and the one (1) 6-20 X 1" screw used for securing the plates to the VHX bezel.** If you wish to use the stock radio; secure the clear lens and stock radio cutout plate to the bezel, 1967 models may need to enlarge radio shaft holes. If you wish to use a standard DIN radio; use the same stock radio plate parts and also place the supplied cutout template over the plate from the front to mark the necessary opening. The radio delete plate can be used if you would like to leave it blank or add optional equipment to your dash that will fit within the opening.




Radio Lens and Radio Plate mounted to the VHX bezel with the three (3) provided 6-32 X 1/4 screws and the 6-20 X 1" screw

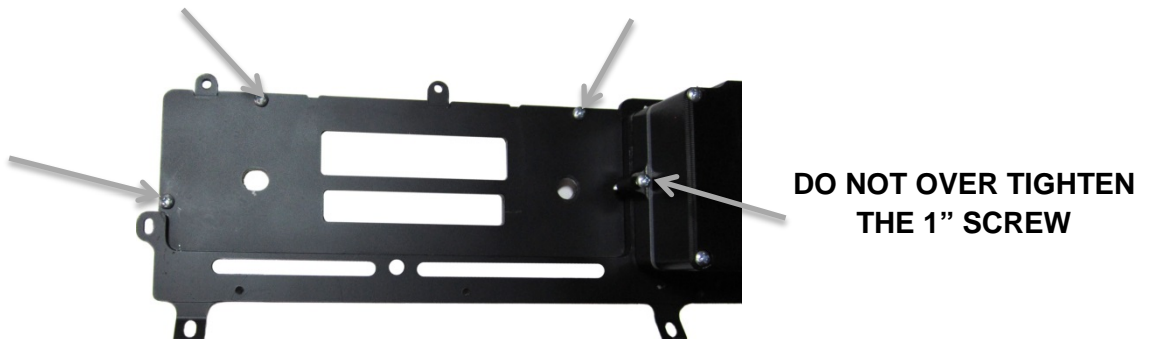

4. With the radio plates in place, you can now mount the VHX system to the stock bezel using the thirteen (13) supplied 5/8" screws.



6. On 1967 models with a back lit heater control, you will have to modify the light housing to fit. Perform two cuts shown below and use the provided 10-32 X 1/4" screw for the center mounting to the VHX bezel.

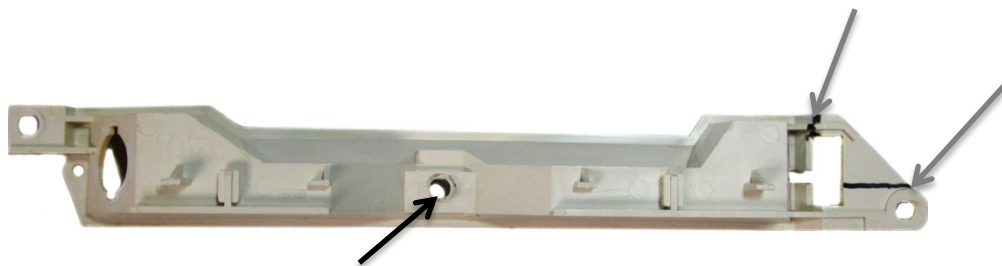

**10-32 X 1/4" Screw used here**

5. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location.



7. Refer to the main manual for wiring instructions to complete the VHX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106