



VHX-1014

Dakota Digital VHX Instrument Installation
Dual Round Universal System (5" diameter hole, 5.4" overall)

Your new VHX-1014 kit should include:

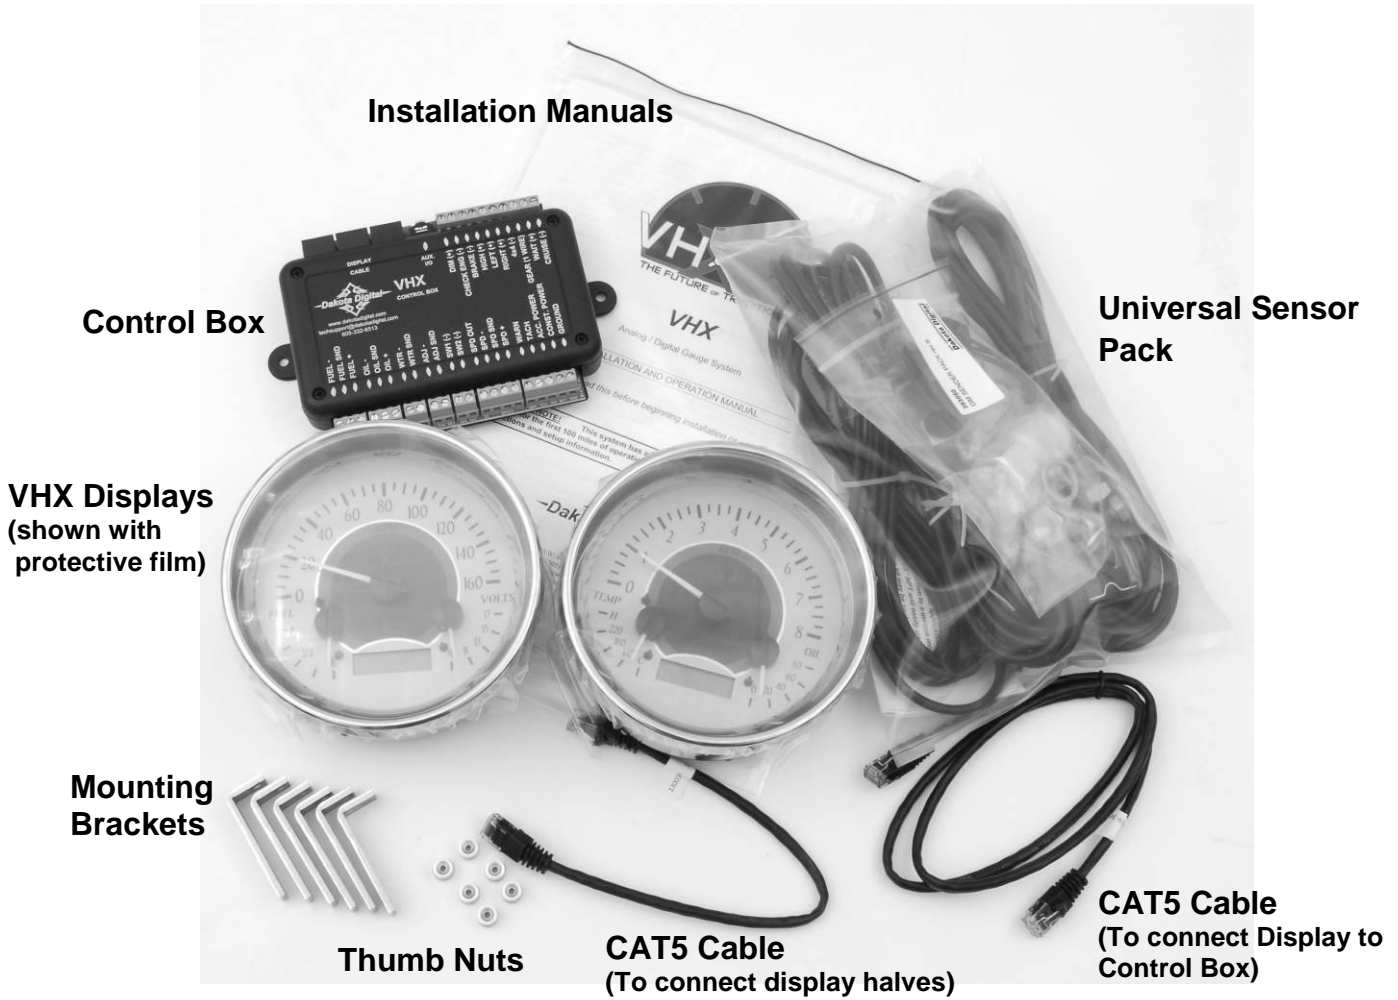


Dimensions:

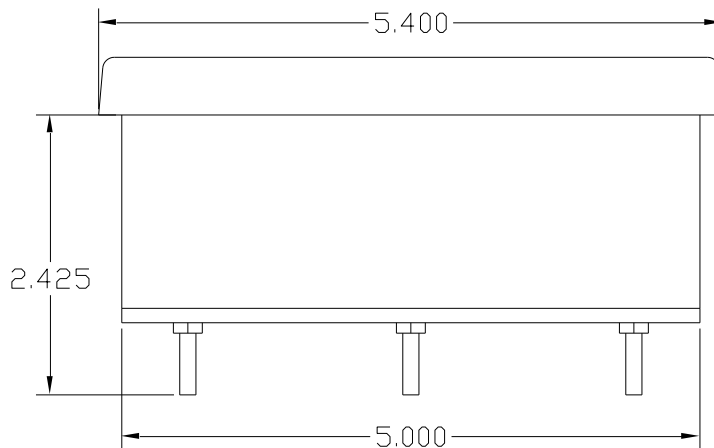


Installation


1. First, you will need to make two openings for the system in your dash or desired mounting location. You will need a 5" diameter hole for the VHX gauge to fit through and sit flush with the surface of the dash. You will also need at least 2.5" of depth behind the gauge openings for adequate clearance.

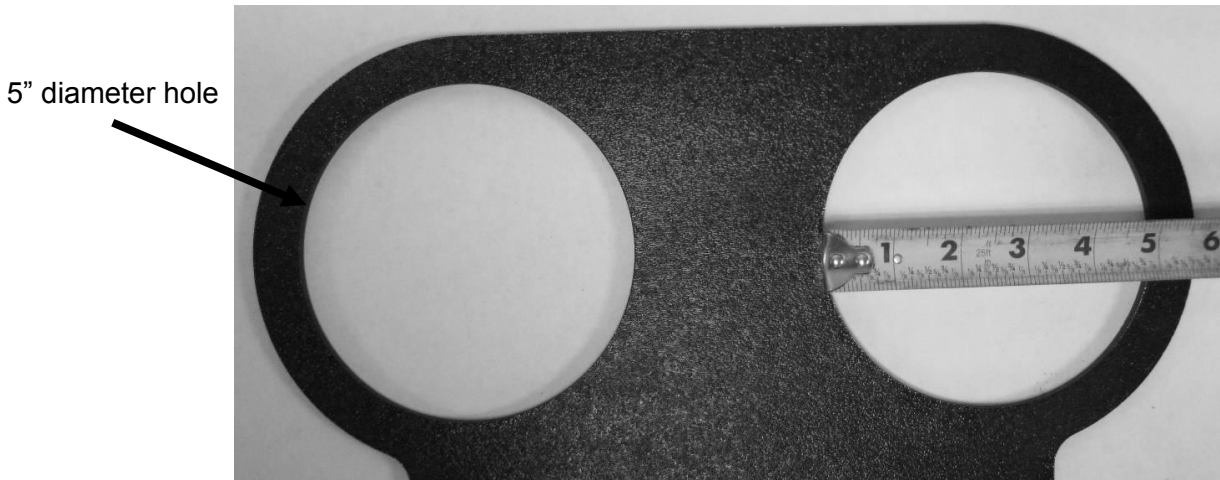


2. Remove the protective tape and insert one of the gauges into a hole and secure using the supplied clamps and thumb nuts. Make sure you align/straighten the system with the dash before you tighten the thumb nuts all the way.

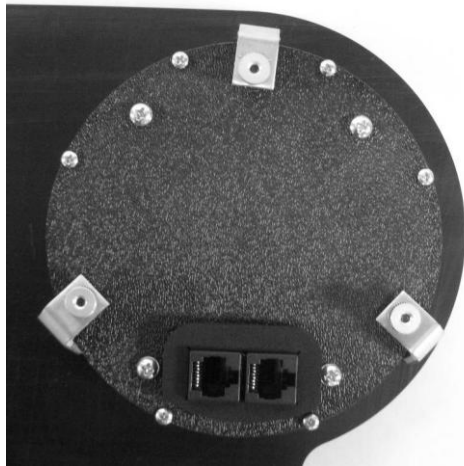

3. Secure the second gauge following the steps above.

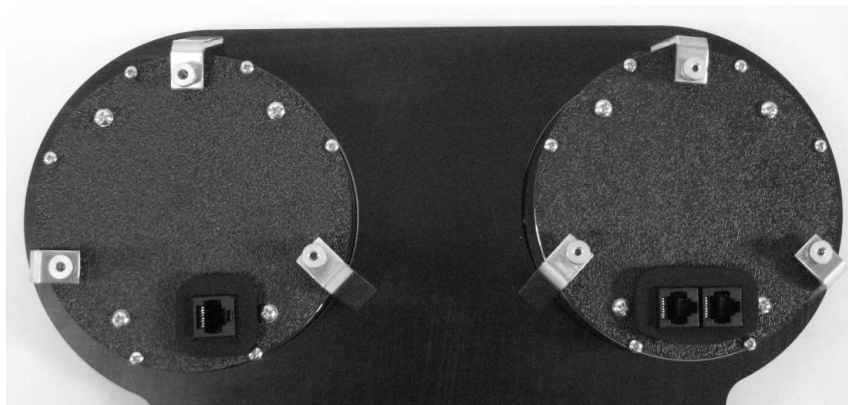

4. Connect the two gauges together using the supplied CAT5 cable.

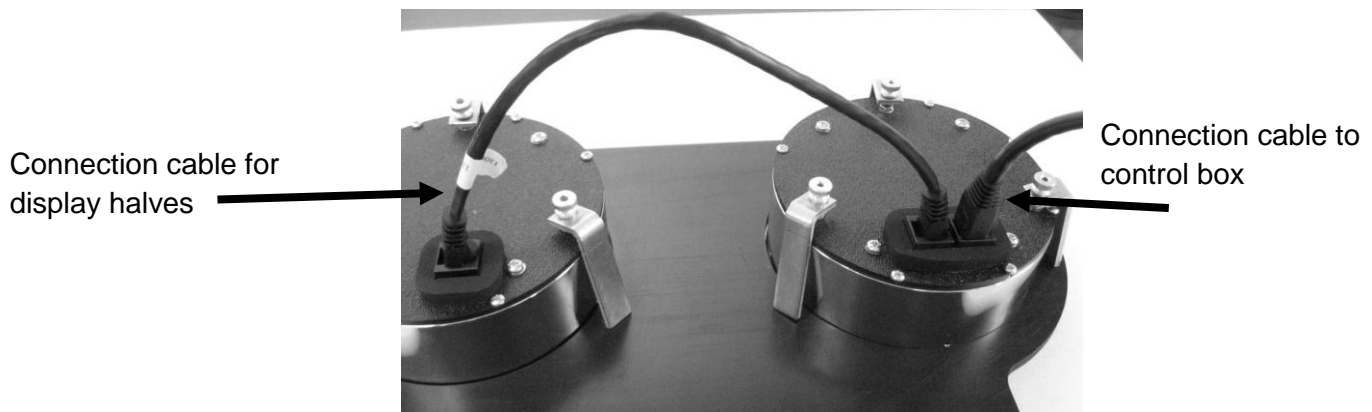

5. System installation is complete. Re-install the dash if you removed it for making holes and refer to the main manual for wiring instructions to complete the VHX installation.



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.