



HDX-2017

Dakota Digital Universal HDX Instrument Installation

Your new HDX-2017 kit includes:

HDX Display



Universal Sender Pack

Buzzer

Installation Manuals



(4x) L-Brackets and Thumb Nuts




Main Harness


Control Box

Installation


1. Use the provided template to mark out the opening needed to fit the HDX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

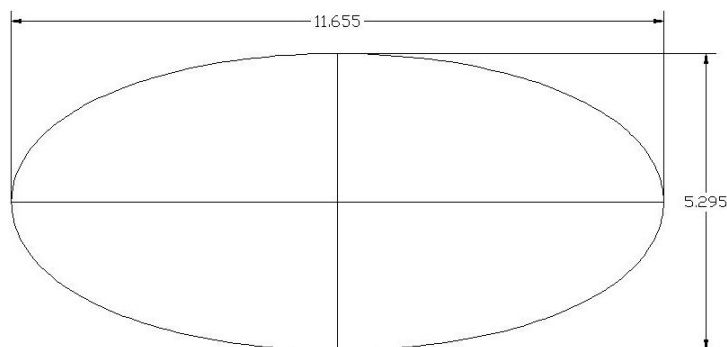

2. With the appropriate opening cut, place the HDX display into the dash and attach the four (4) L-brackets to the back of the display using the provided thumb nuts.

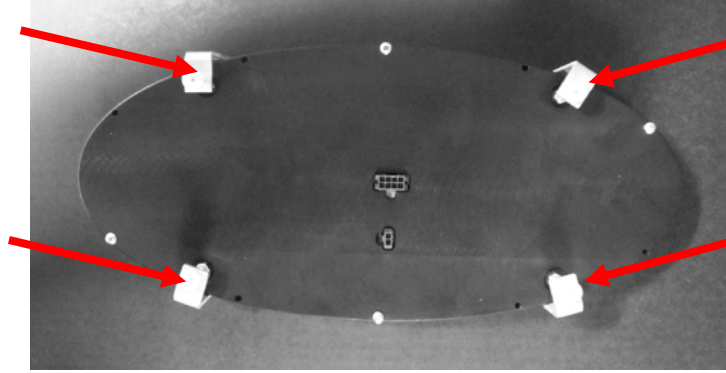

3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

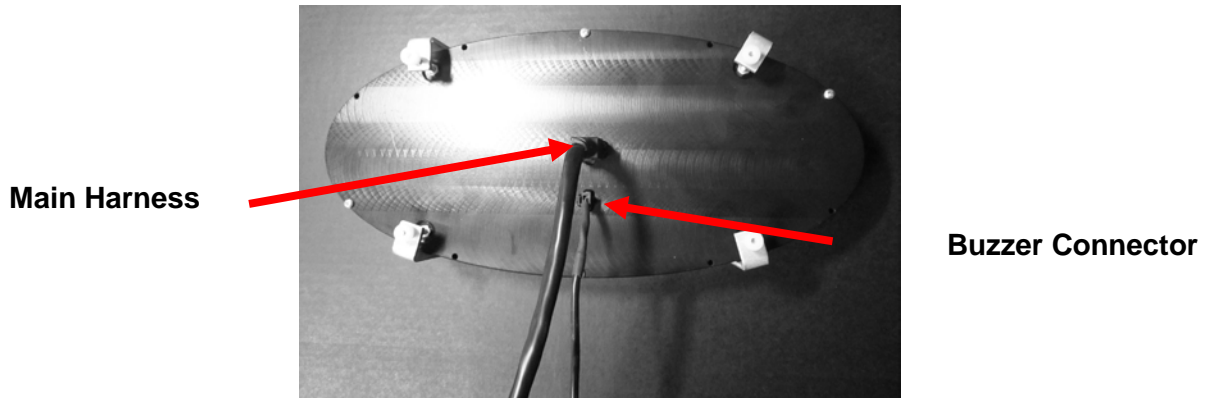

4. Refer to the main manual for wiring instructions to complete the HDX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.