



HDX-2060

Dakota Digital Universal HDX Instrument Installation

Your new HDX-2060 kit includes:

HDX Display



Gaskets
2X Large
4X Small

Universal Sender Pack



Buzzer



Installation Manuals



14X Thumb Nuts



Interconnect Harness

Main Harness

Control Box

2X Y Harnesses



Mounting Cups
2X Large
4X Small




2X Extension Harnesses





2X Terminator Harnesses

Installation


1. Use the provided template to mark out the 3 3/8" and 2 1/16" openings needed to fit the HDX displays. Ensure there is adequate clearance behind the desired mounting location. The display units need approximately two inches of depth behind the dash.

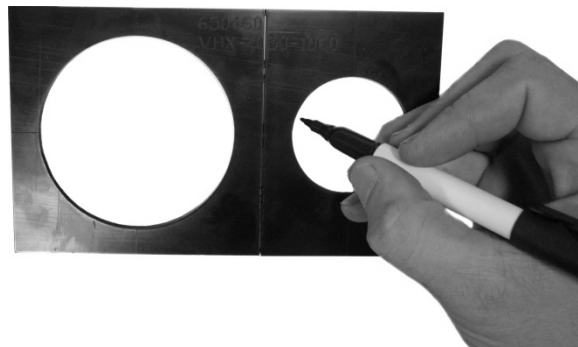

2. With the appropriate openings cut, place the HDX displays into the dash, then slide the gasket and mounting cup over the back of the gauge. Use the supplied thumb nuts to secure each gauge.

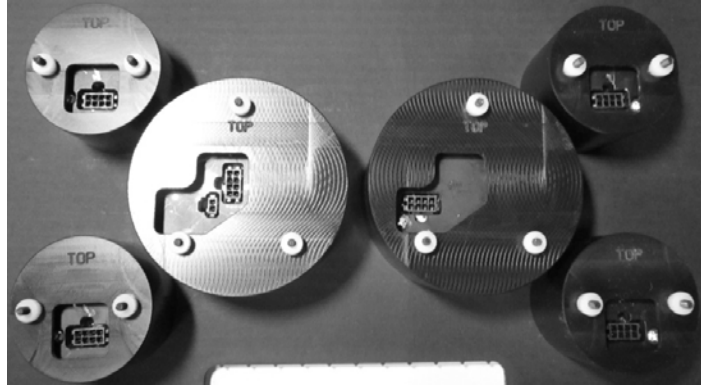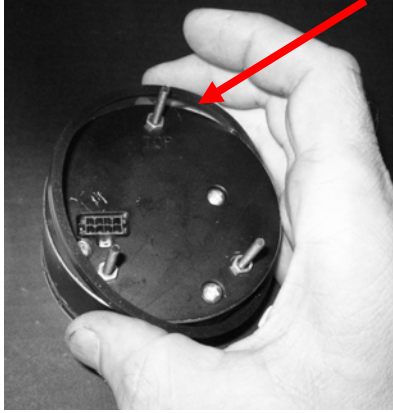


3. A combination of harnesses is provided for added versatility. The gauges can be connected in any order while using the extension harnesses if needed. If you wish to drop any gauges the terminator harness is needed so there are no open ends for proper operation. The Display gauge must be used for initial setup and be factored in for harness connections.

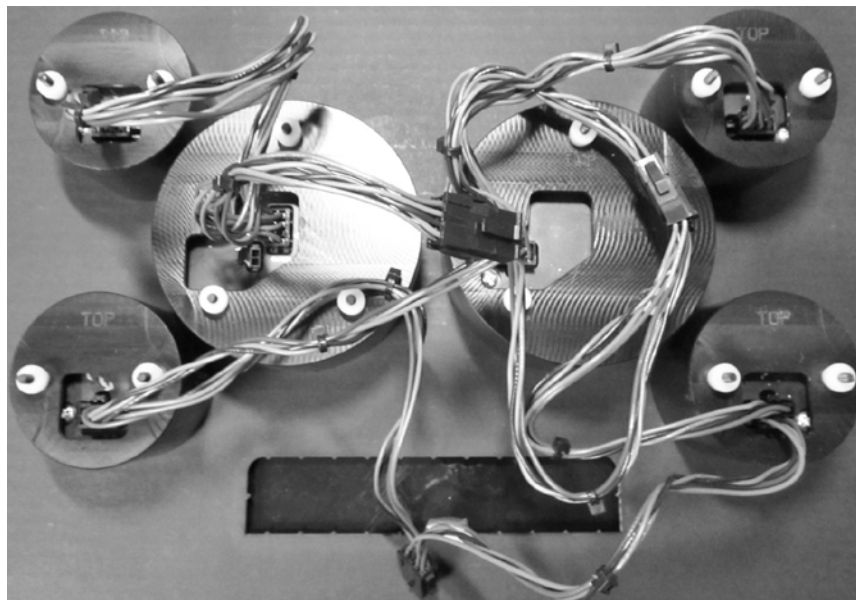

3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

Buzzer Connector

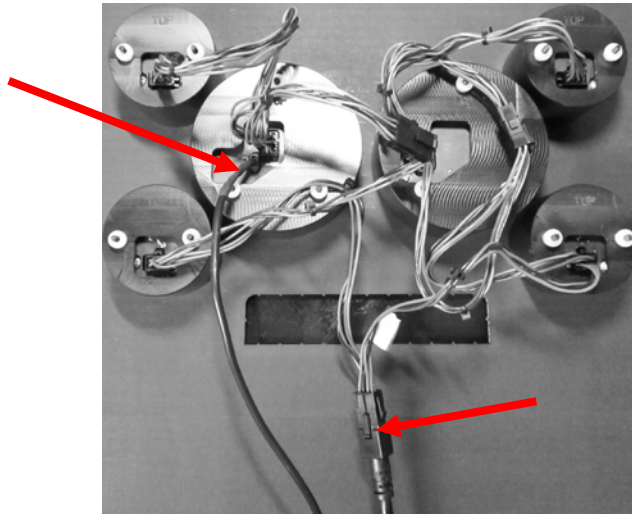

4. Refer to the main manual for wiring instructions to complete the HDX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2017 - Dakota Digital