



HDX-47C-PU

Dakota Digital HDX Instrument Installation For 1947-'53 Chevy Pickups

Vour new HDX-47C-PU kit includes:

HDX Display

Universal Sender
Pack
Buzzer Installation Manuals

Interconnect
Harness

8x Screws

2X Mounting Tabs

Foam Gaskets

Main Harness

Control Box

Installation

1. Remove the stock gauges from the dash. Each gauge is held in place by four nuts on studs on the back of the dash. Save the nuts as they will be re-used to secure the new HDX kit.



2. Your HDX kit comes with two variations for lower mounting tab locations, choose the location you need by aligning the four mounting tabs to the studs in the dash. Once the correct mounting location is decided; secure the tab to the housing by lining up the thru-holes in the tab to the holes in the housing and using the supplied screws (4 per gauge). Repeat on second gauge so both Speed and Tachometer have the mounting tabs in the correct location.




3. Place the supplied foam gaskets over the new chrome bezel.







4. Secure the new HDX Instruments back into the dash re-using the original nuts, eight total.

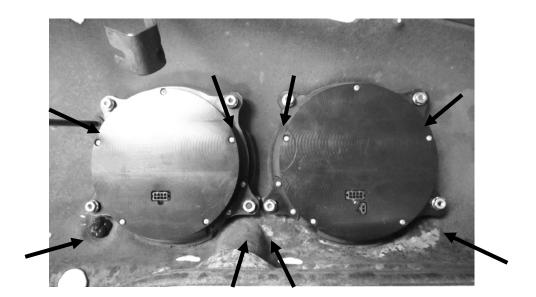

5. Connect the provided interconnect harness to the back of the HDX system.

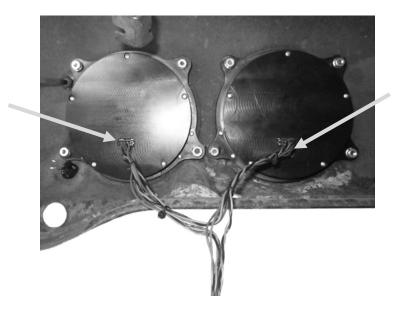

6. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

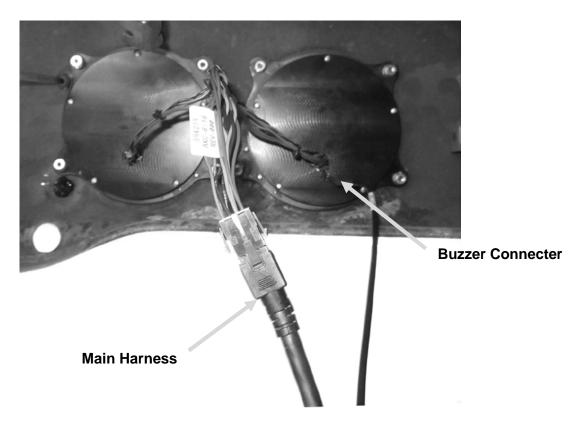

7. Refer to the main manual for wiring instructions to complete the HDX installation.



MARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513 Fax (605) 339-4106