



HDX-56F-PU

Dakota Digital HDX Instrument Installation
For 1956 Ford Pickup

Your new HDX-56F-PU kit includes:

HDX Display



Universal Sender Pack

Buzzer

Installation Manuals



(5x) 1.25" Screws, Lock Washers, & Mounting Brackets




Ford Speed Adapter

Main Harness

Control Box

Installation

1. Remove the stock gauges from the dash. Using plier, pry back the crimped edges of the backing plate.

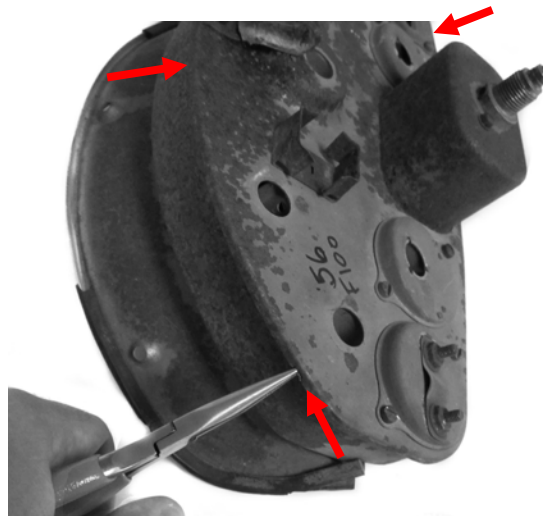



2. Between the shroud and the bezel located on the top hemisphere of the bezel, there are several tabs securing the speedometer to the bezel. Using a plier, bend the tabs straight so the speedometer can be removed.




3. Using a pliers once again, bend the metal tab back and forth until it snaps off.
NOTE: Some bezels don't have this tab.



5. Place the Dakota Digital gauge into the factory bezel; using the supplied mounting brackets, attach the smaller end of the clip underneath the lip of the factory dash and secure the HDX system to the bezel with the supplied screws and lock washers.

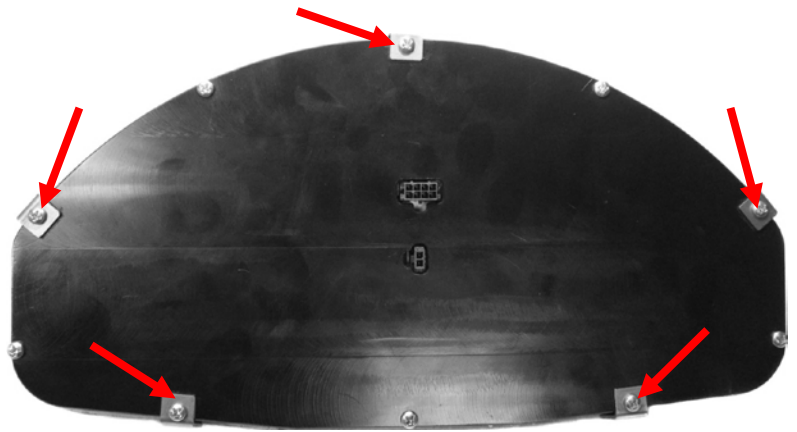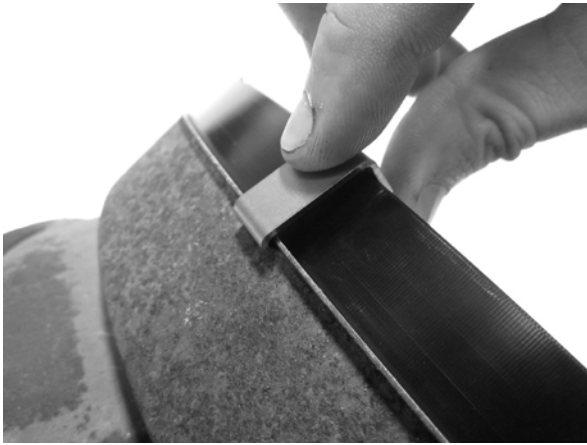


5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

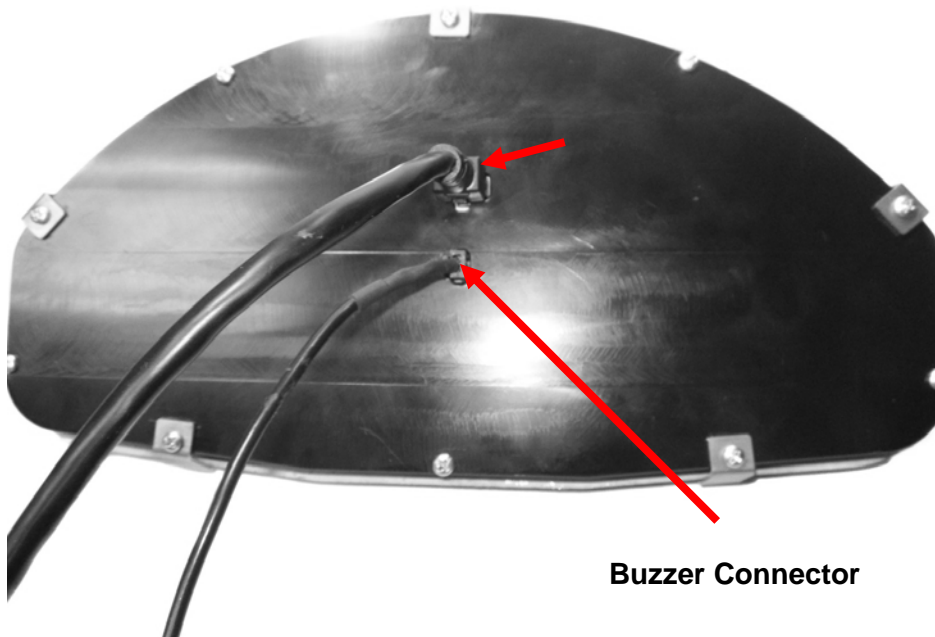

Buzzer Connector

6. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the HDX installation.

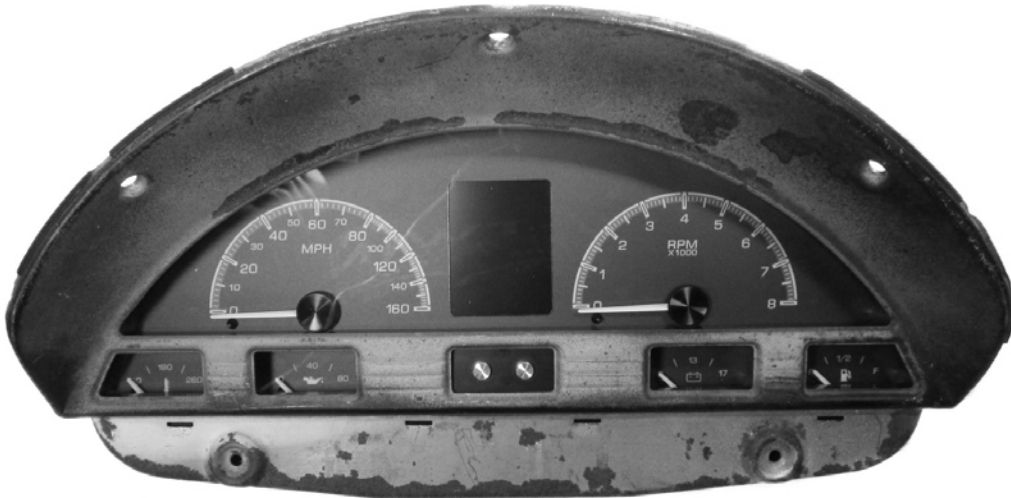

⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.