



# HDX-58C-VET

Dakota Digital HDX Instrument Installation  
For 1958-'62 Corvette

Your new HDX-58C-VET kit includes:

**HDX Display**



**Universal Sender Pack**



**Buzzer**



**Installation Manuals**



**Interconnect Harness**



**Main Harness**

**Control Box**





## Installation

1. Remove the stock bezel from the dash and remove the original gauges. Save all hardware for reassembly.




2. Mount the tachometer in the center round opening using factory hardware.

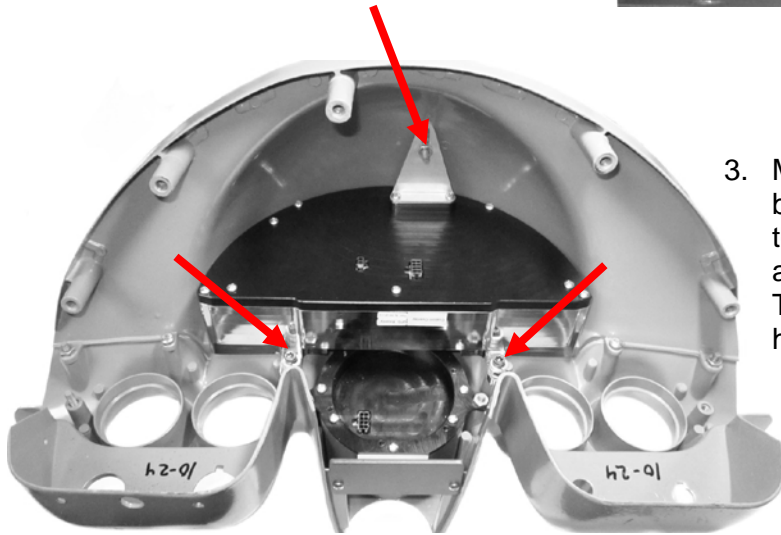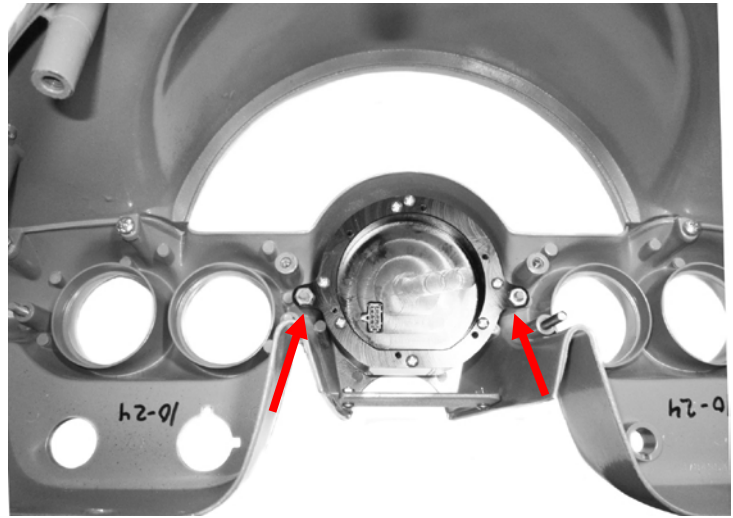


3. Mount the speedometer; with the aluminum bracket already attached, align the bracket to the stud at the top of the original bezel and fasten it in place using stock hardware. Tighten the two lower tabs with stock hardware.

4. The Fuel/Temp and Volts/Oil clusters can now be mounted using the factory hardware. When looking from the back, Volts/Oil will be on the left side and Fuel/Temp will be on the right side.

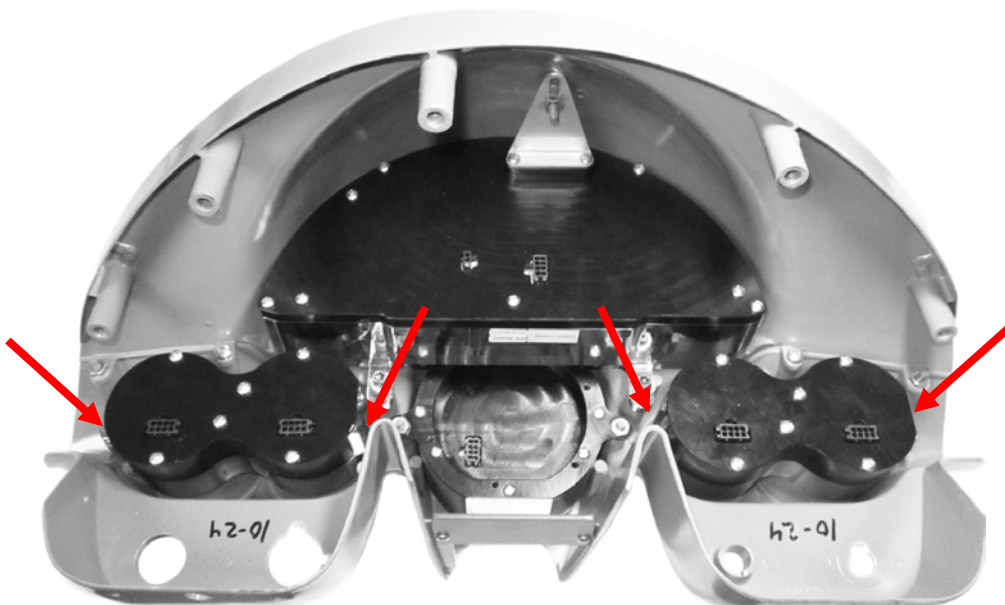


5. Connect the provided Interconnect harness to the back of the HDX system.

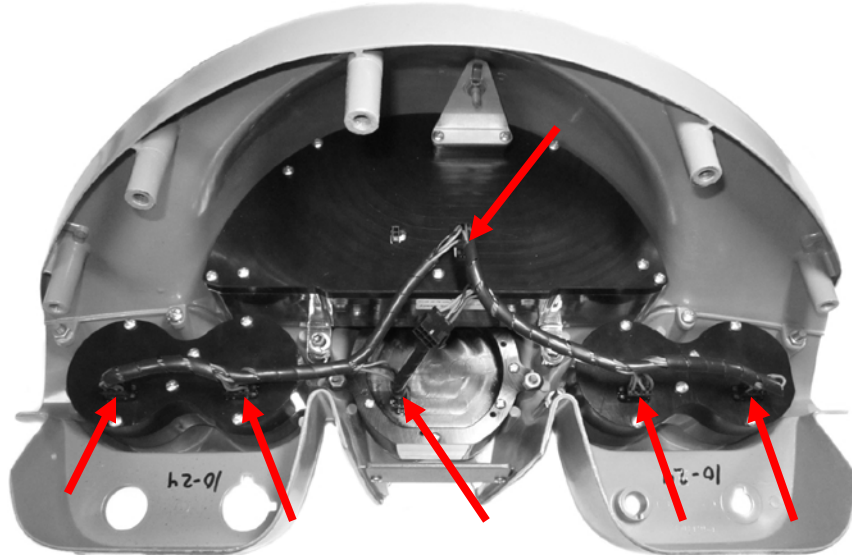

6. Connect the provided Main Harness to the interconnect harness and the Buzzer (optional for audio feedback) to the back of the HDX system.

**Buzzer Connector**

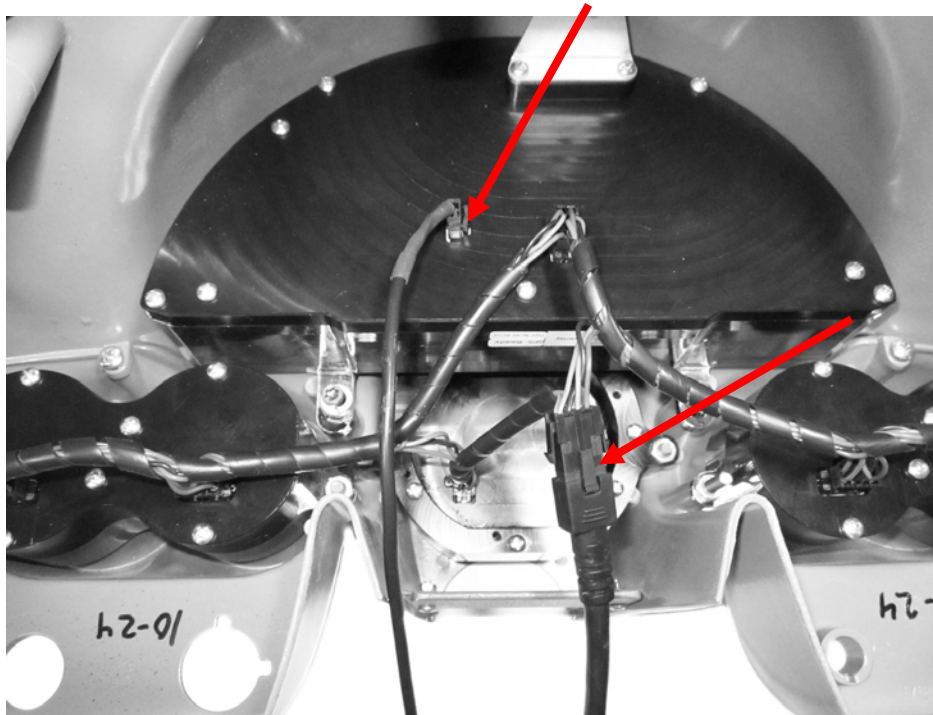

7. Re-install the bezel using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106