




## HDX-63C-IMP

Dakota Digital HDX Instrument Installation  
For 1963-'64 Chevy Impala, Biscayne, and Bel Air

Your new HDX-63C-IMP kit includes:

**HDX Display**

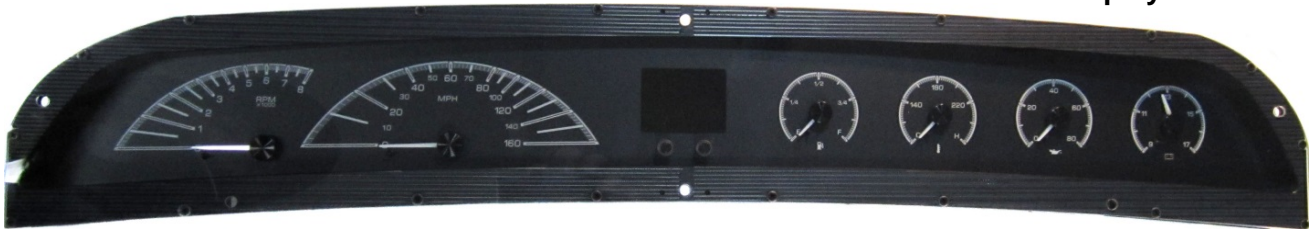

**Universal Sender Pack**



**Buzzer**



**Installation Manuals**



**10-32 Screw  
#10 Lock Washer  
10-32 Hex Nut**


**Main Harness**

**Control Box**




## Installation


1. Remove the stock gauges from the dash by removing the nine Phillips head screws holding the bezel in the dash.

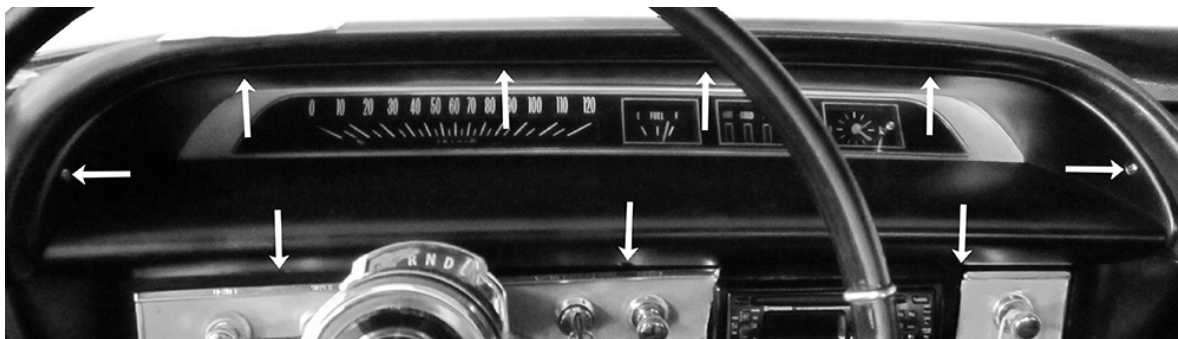


2. Separate the stock gauges from the bezel by removing the five screws securing the gauges to the bezel. There is also a nut to remove from a stud on the top side of the gauges. The five screws will be re-used for reassembly.

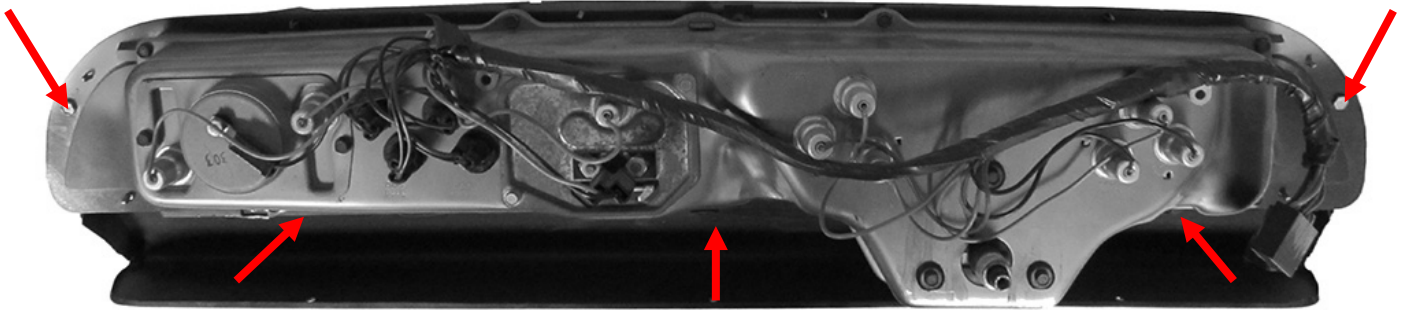


Stud and nut to be removed

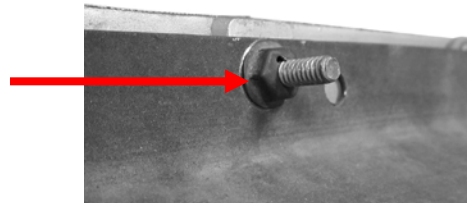


3. Secure the HDX system to the stock bezel using the five stock screws and the provided screw, lock washer, and hex nut in the top center mounting location.

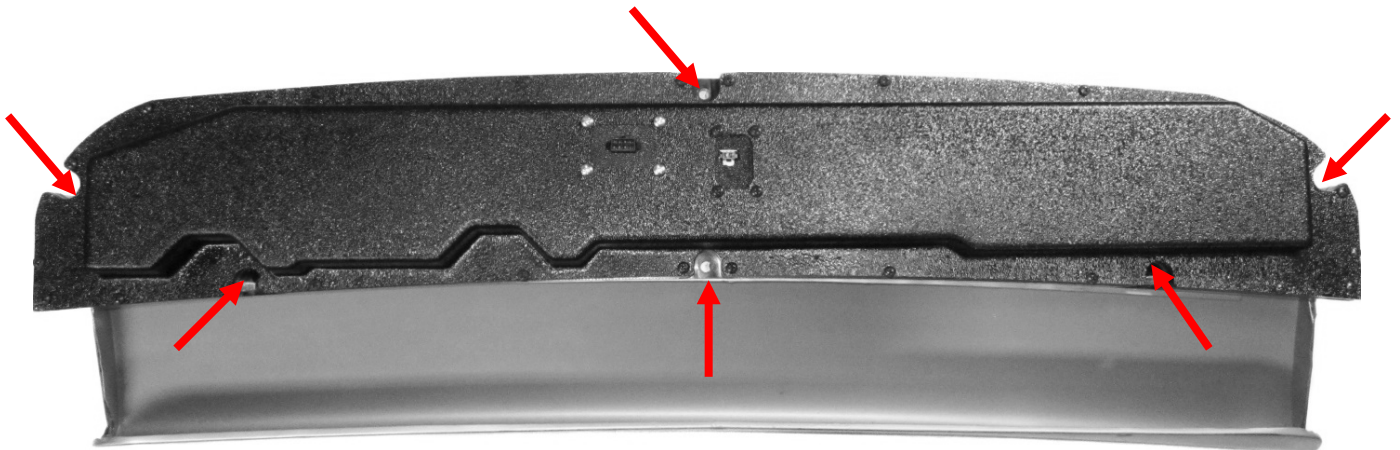

4. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the HDX system.

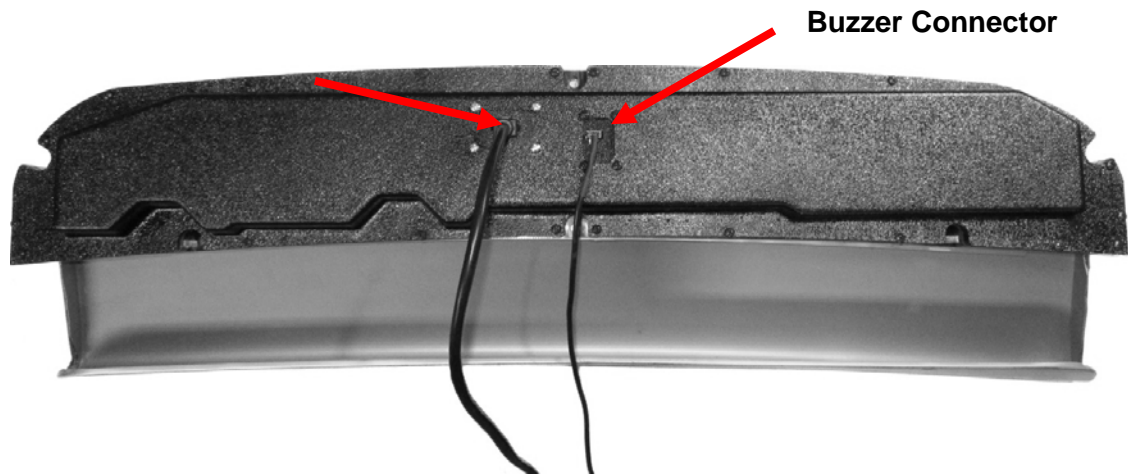

5. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.

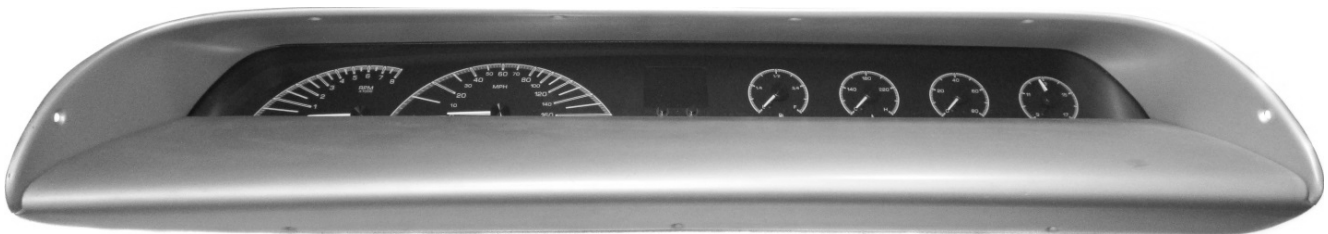

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106