



# HDX-66C-NOV

Dakota Digital HDX Instrument Installation  
For 1966-'67 Chevy Nova

Your new HDX-66C-NOV kit includes:

## HDX Display



## Universal Sender Buzzer Pack



## Installation Manuals



Main Harness

(x7) #6-20x1.25" Screws

(x5) #8-18x.375" Screws

(x7) #6 Washers




Control Box




## Installation


1. Remove the stock gauges from the dash. Disassemble the stock instrument system by removing the seven (7) screws holding the instrument housing to the bezel.

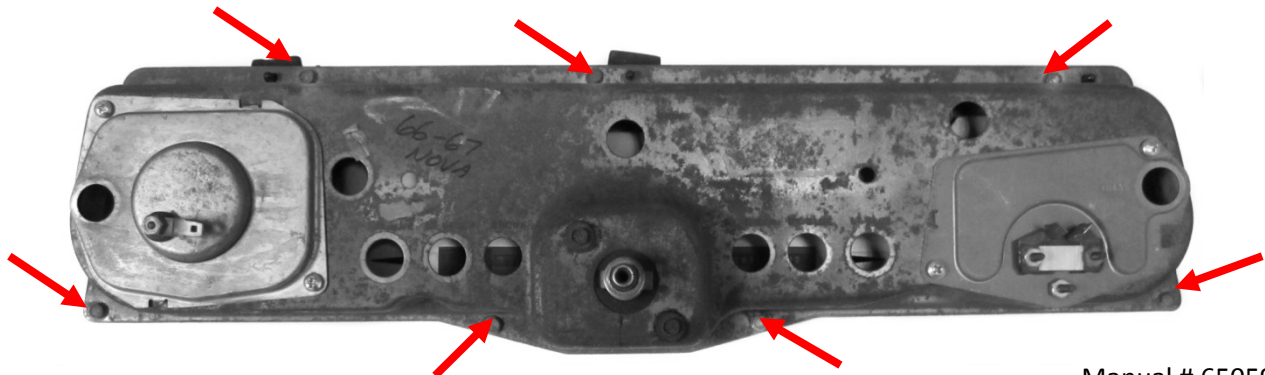


2. Detach the lens from the bezel and separator plate by removing the two (2) screws shown below. The only item to be reused is the original front bezel and hardware.

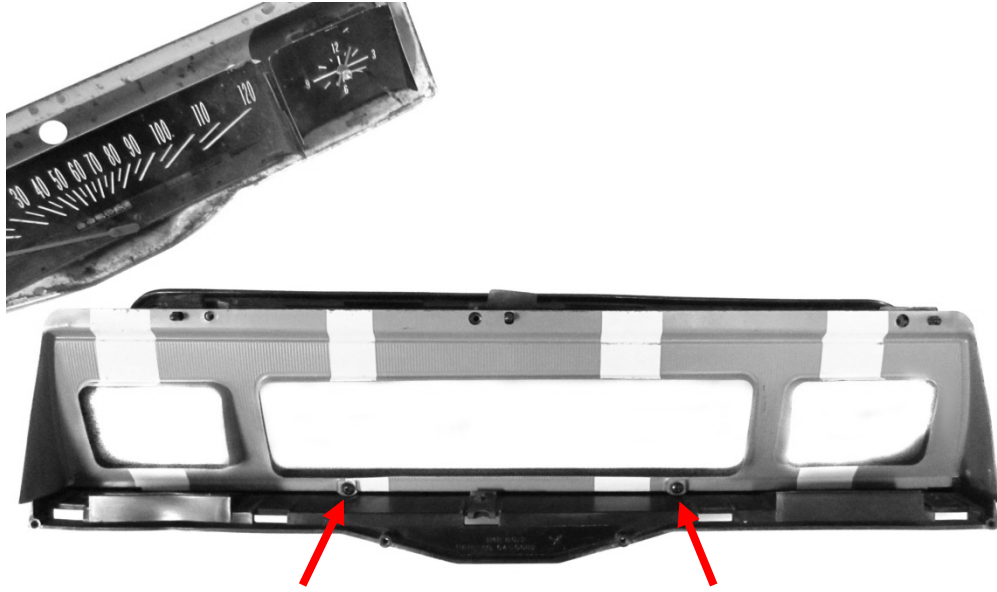

3. Place the HDX system into the bezel, taking care to align all mounting holes. Using the seven (7) provided #6-20x1-1/4" screws and washers; secure the gauges to the bezel. Pay special attention to align all visible surfaces before tightening the provided hardware. Some bezels may be bowed and not perfectly straight, requiring slight adjustments.

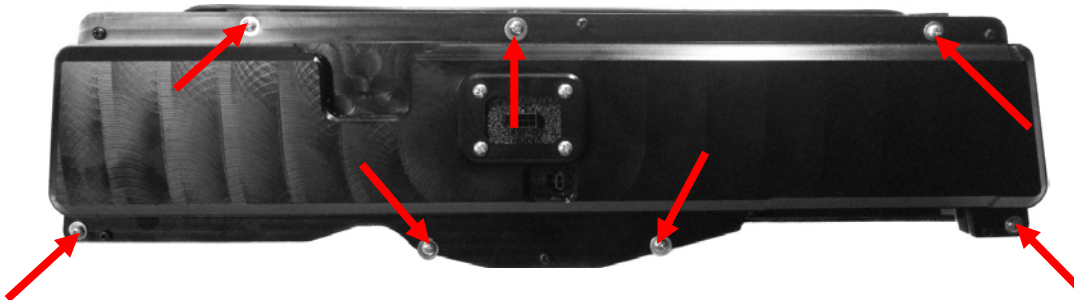


4. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the HDX system.

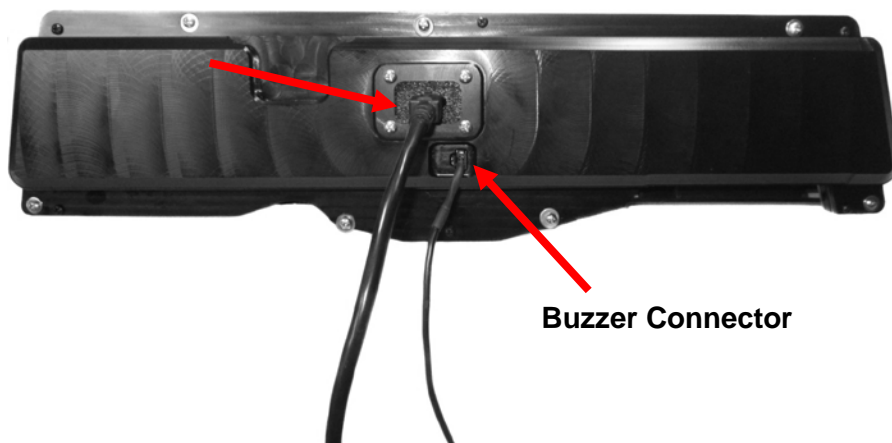


5. Secure the cluster to the dash using the five (5) provided #8-18x.375" screws at the base of the bezel; use the four (4) factory flat head screws at the top of the bezel

(4) Factory screws

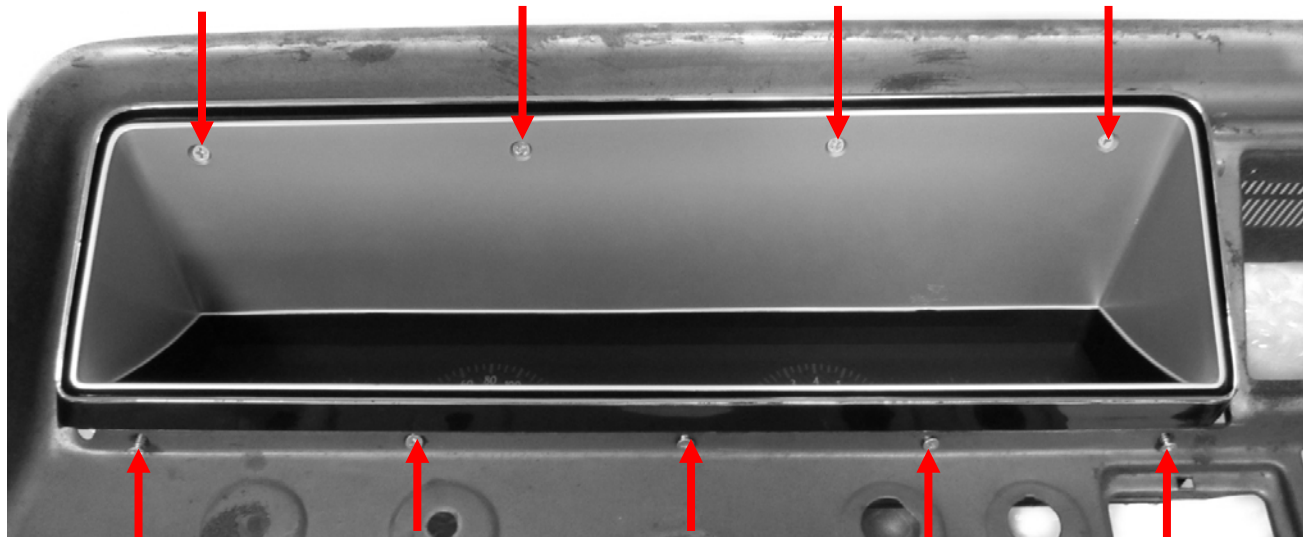

(5) Provided screws

6. Refer to the main manual for wiring instructions to complete the HDX installation.

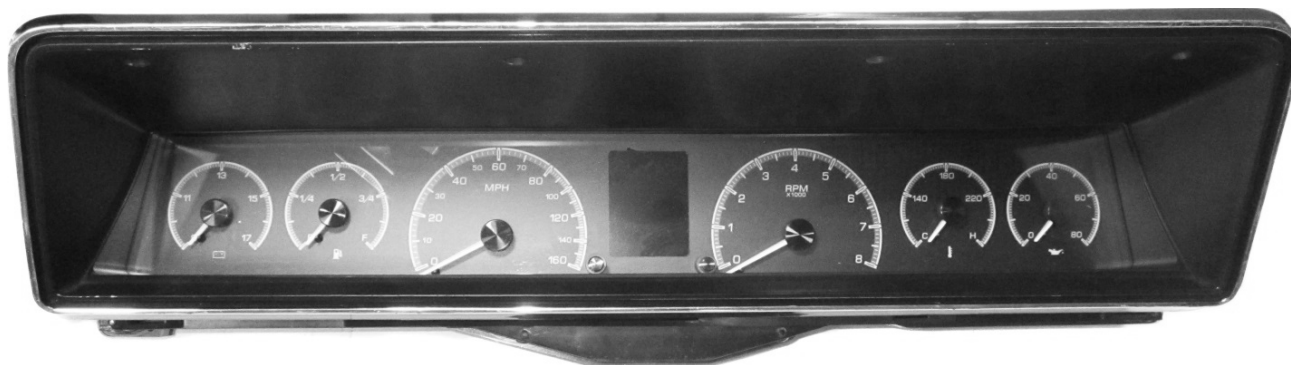

**⚠️WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.