



## HDX-66F-BRO

Dakota Digital HDX Instrument Installation  
For 1966-'77 Ford Bronco  
For 1961-'66 Ford Pickup

Your new HDX-66F-BRO kit includes:



(4) 1/2" Screws

HDX Display



Universal Sender  
Pack

Buzzer

Installation Manuals



Main Harness




Control Box




Ford Speed Adapter

## Installation

1. Remove the stock gauge cluster from the dash.

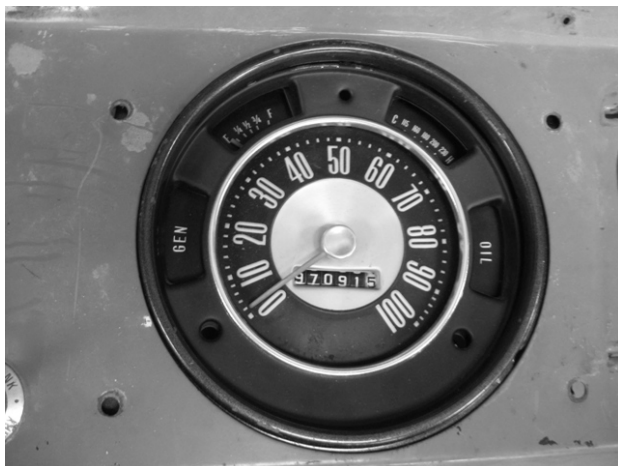


2. Remove these four screws to separate the bezel from the gauges.

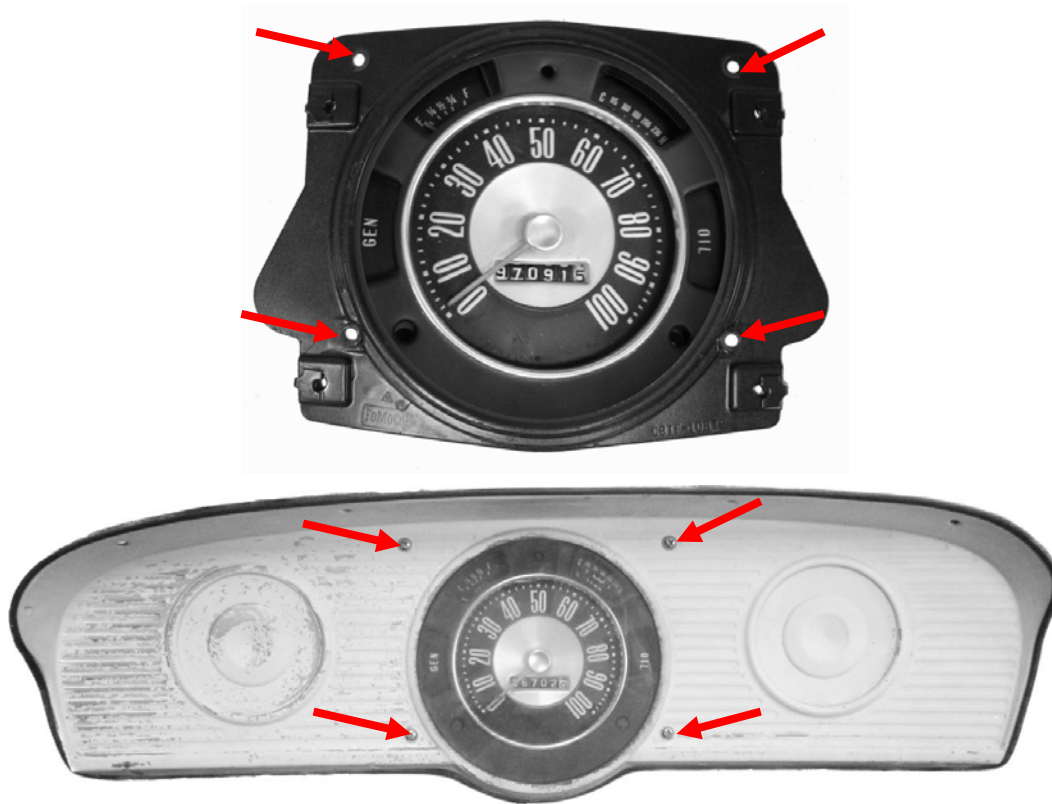


3. The only part that will be re-used is the stamped bezel and the screws that mount the bezel.



4. Secure the HDX system to the bezel with the four supplied screws. The HDX system should align tightly and sit flush with the bezel.

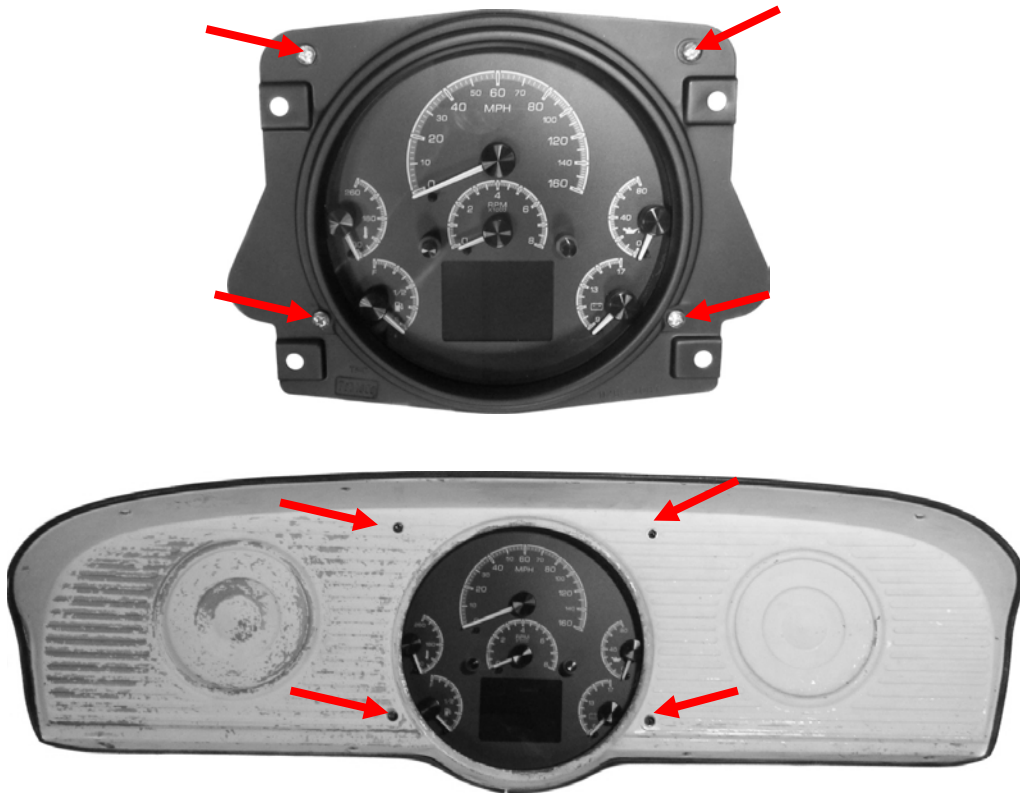

5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

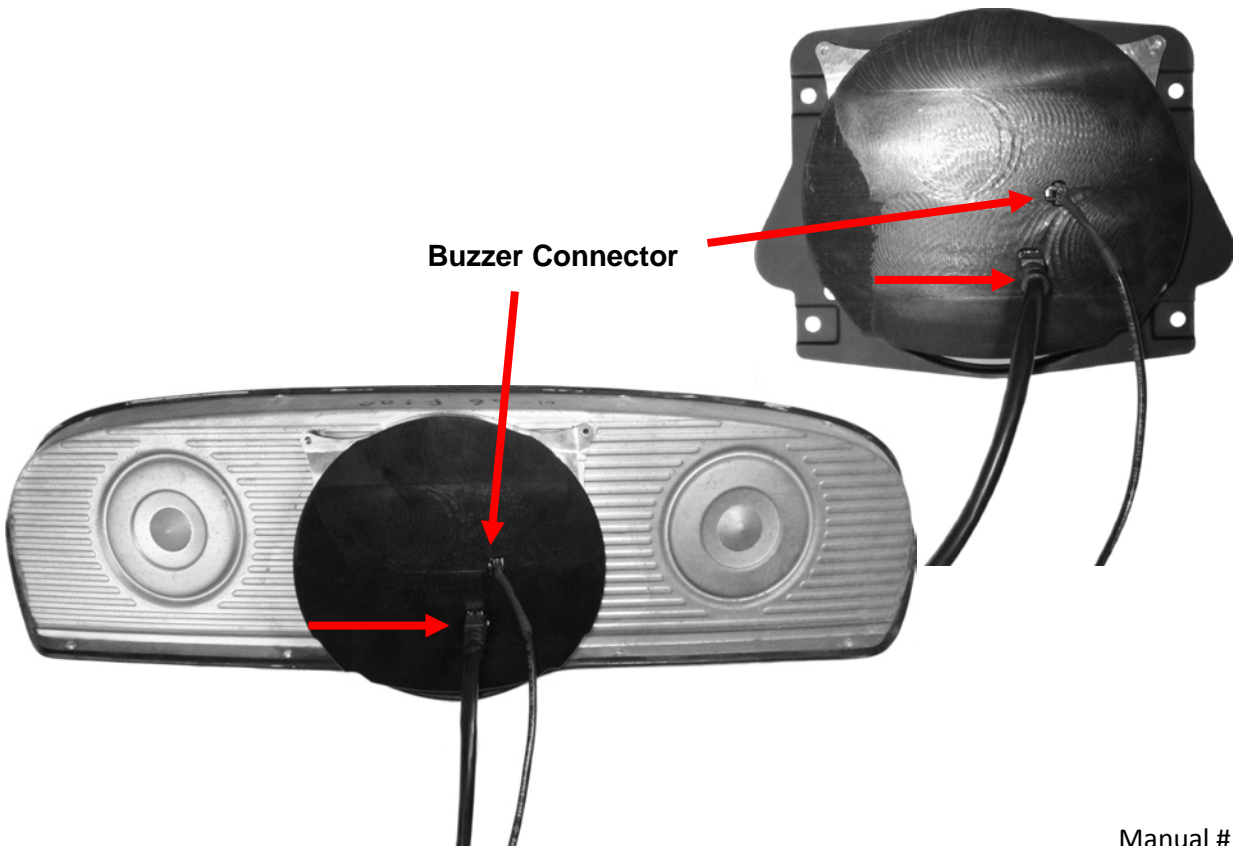

6. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the HDX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106