



HDX-67C-CAM

Dakota Digital HDX Instrument Installation
For 1967-'68 Chevrolet Camaro and Pontiac Firebird

Your new HDX-67C-CAM kit includes:

HDX Display



Universal Sender
Pack



Buzzer



Installation Manuals



Interconnect
Harness



Foam Tape



Main Harness

Control Box




Installation

1. Remove the stock gauge cluster from the dash.



2. Remove the five screws holding the gauges to the bezel on the back of the system.

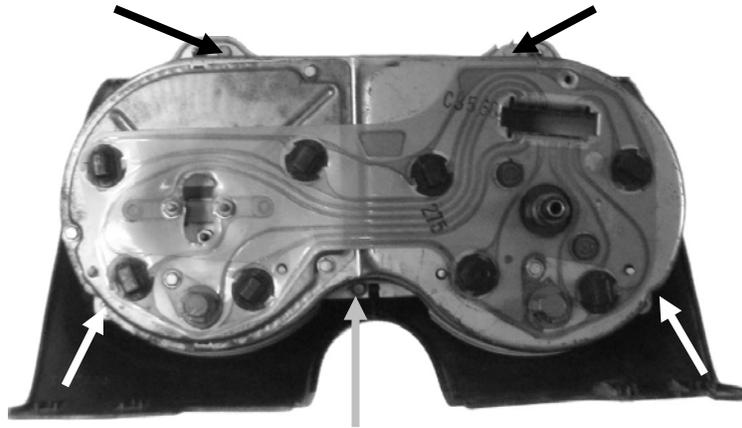

3. Remove the stock gauges and lens from the bezel




4. For this step, you can re-use the stock foam blocks or use the supplied foam to make replacements for missing or brittle foam pieces. Cut the supplied foam into four small pieces, approximately 1.5" long.




On the top two locations, fold the foam over the edges and make sure it's not sticking into the visible window. In the bottom two corners, the area for the tape is slightly narrower than the foam so you will need to ensure the foam is curved with the opening in the housing.


5. Mount the HDX system to the bezel using the five original screws from disassembly.

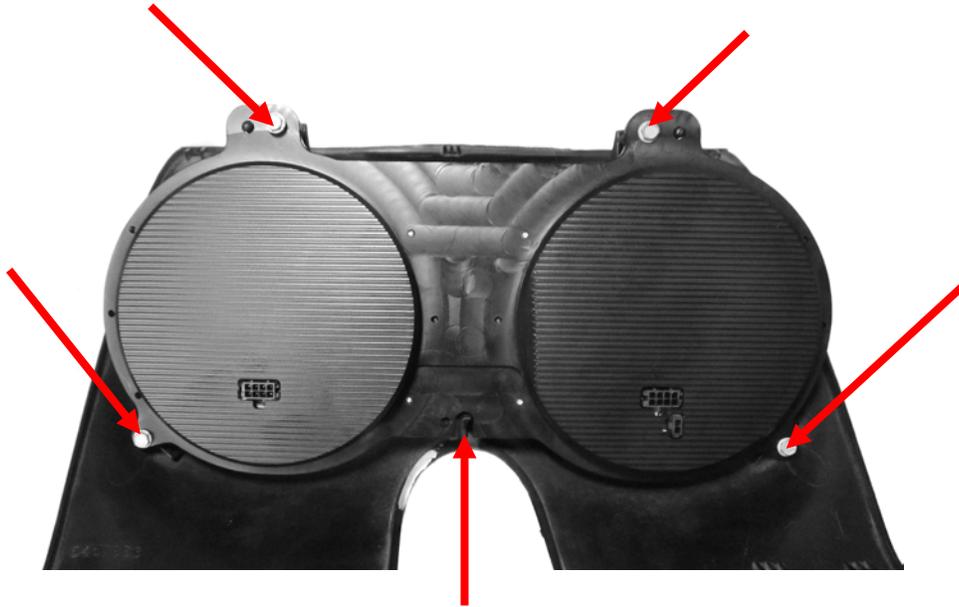


6. Connect the provided interconnect harness to the back of the HDX system.

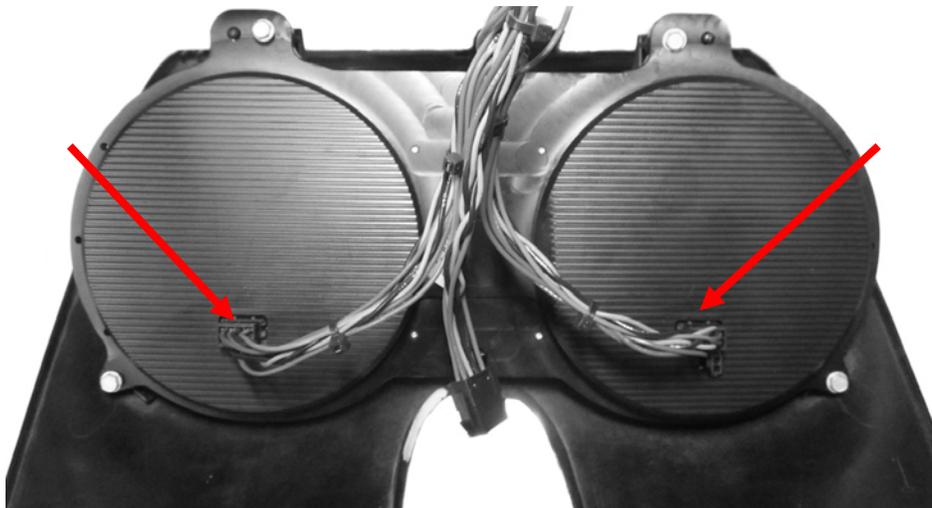

7. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

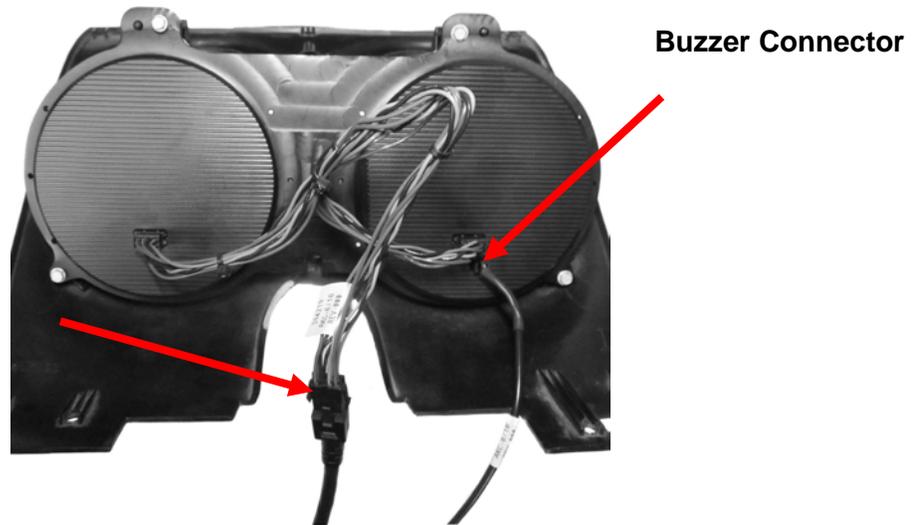

8. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the HDX installation.

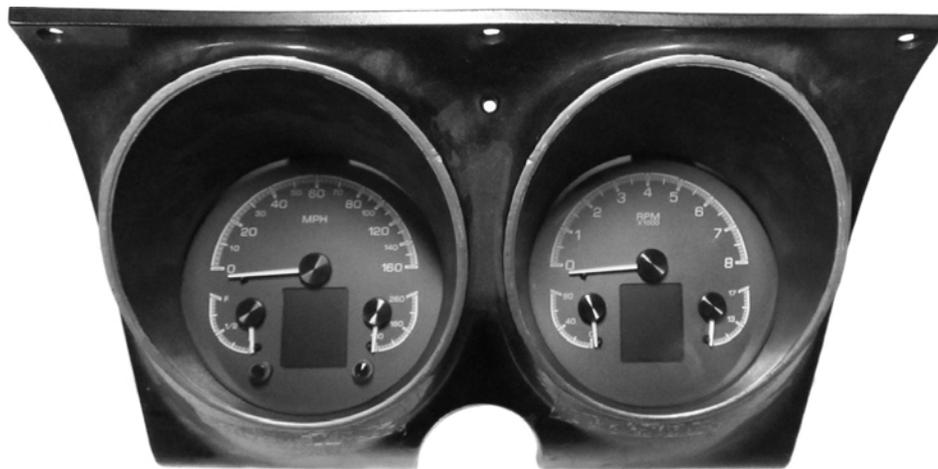

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.