




HDX-67C-PU Dakota Digital HDX Instrument Installation For 1967-'72 Chevy Pickups




Installation

1. Remove the stock gauges from the dash. Remove the eight screws holding the gauges to the bezel on the back of the system. These screws will be used to secure your HDX system in the stock bezel.

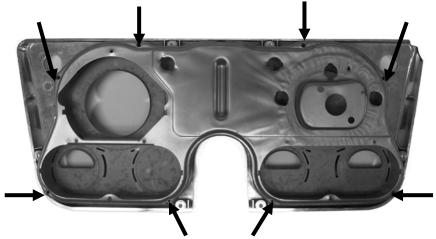


Manual # 650562A

2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be set aside. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.

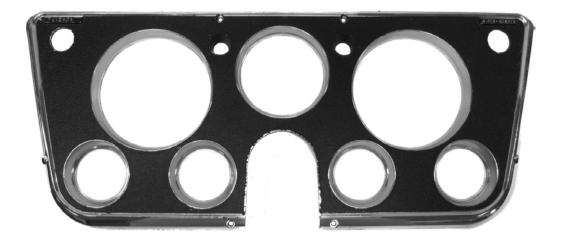


3. Secure the HDX system to the bezel with the eight screws removed from the stock gauges.

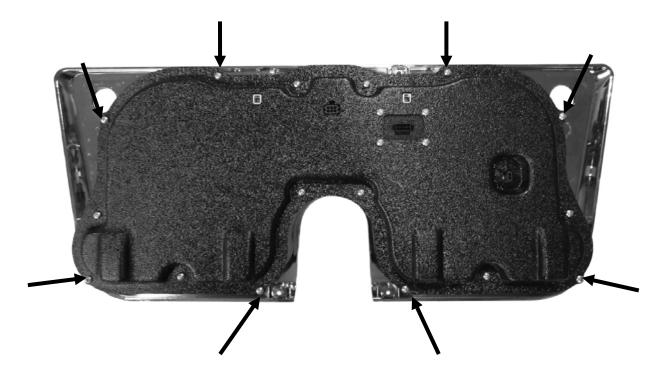


4. This system comes with two options for the turn signals. You can have the indicators located in the faceplate of your new HDX display, and/or arrows in your vehicle's stock locations. To use the new faceplate arrows, follow the wiring instructions found in the main HDX manual.

To optionally use the stock locations, do not wire the turn signals to the HDX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into the connectors on the back side of your new HDX system:

WHITE\GREEN wire to INDICATOR CIRCUIT WHITE\BLACK wire to CHASSIS GROUND

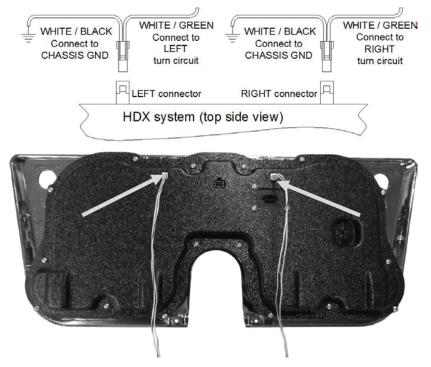

5. Connect the provided main harness, clock harness, and the buzzer (optional for audio feedback) to the back of the HDX system.

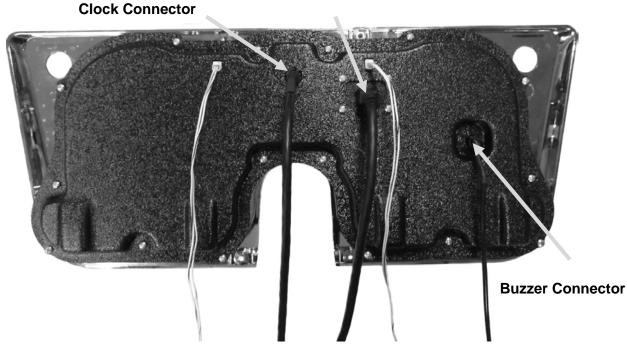

Main Connector

6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the HDX installation.



WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <u>www.P65Warnings.ca.gov</u>



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Manual # 650562A