



HDX-69F-MUS
 Dakota Digital HDX Instrument Installation
 For 196-'70 Ford Mustang

Your new HDX-69F-MUS kit includes:



Installation

1. Remove the stock gauge panel from the dash, be sure to save the hardware for reassembly.






2. Remove the stock gauge cluster from the bezel and save the three separator pieces and the hardware for reassembly.


3. Reinstall the three separator pieces onto the bezel.




4. Align the HDX system on the separator pieces and use the stock hardware to secure to the bezel. The bottom two mounts of the Speed and Tach assembly will use the supplied $\frac{3}{4}$ " counter sunk screws as shown with the blue arrows.

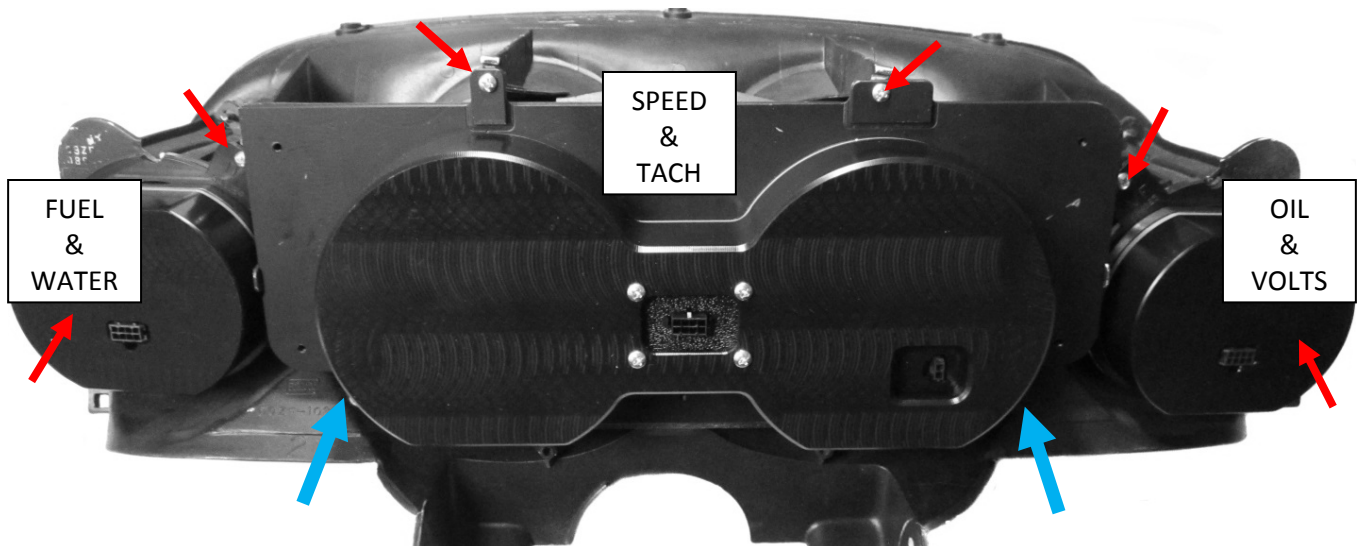

5. Make the interconnect harness connections to the gauges with their respective length ends.

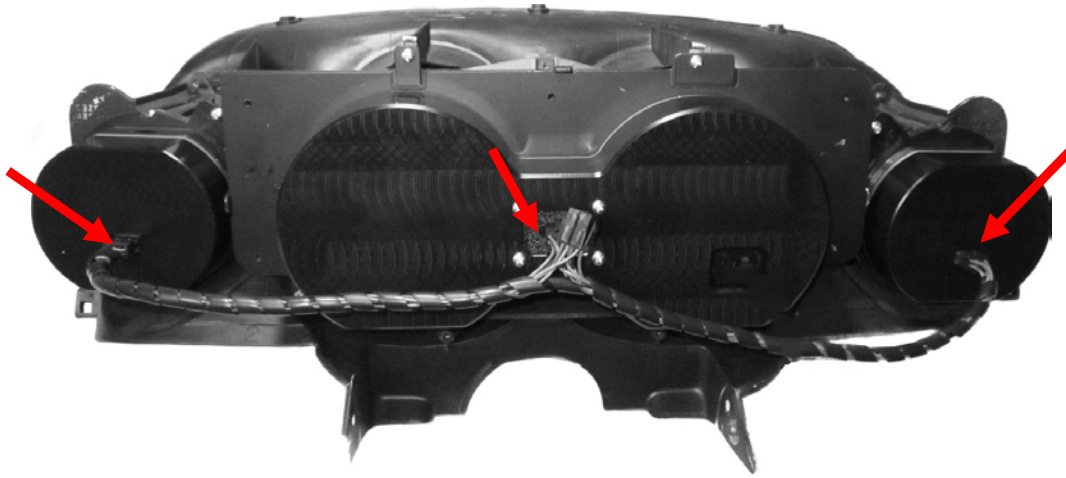

6. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

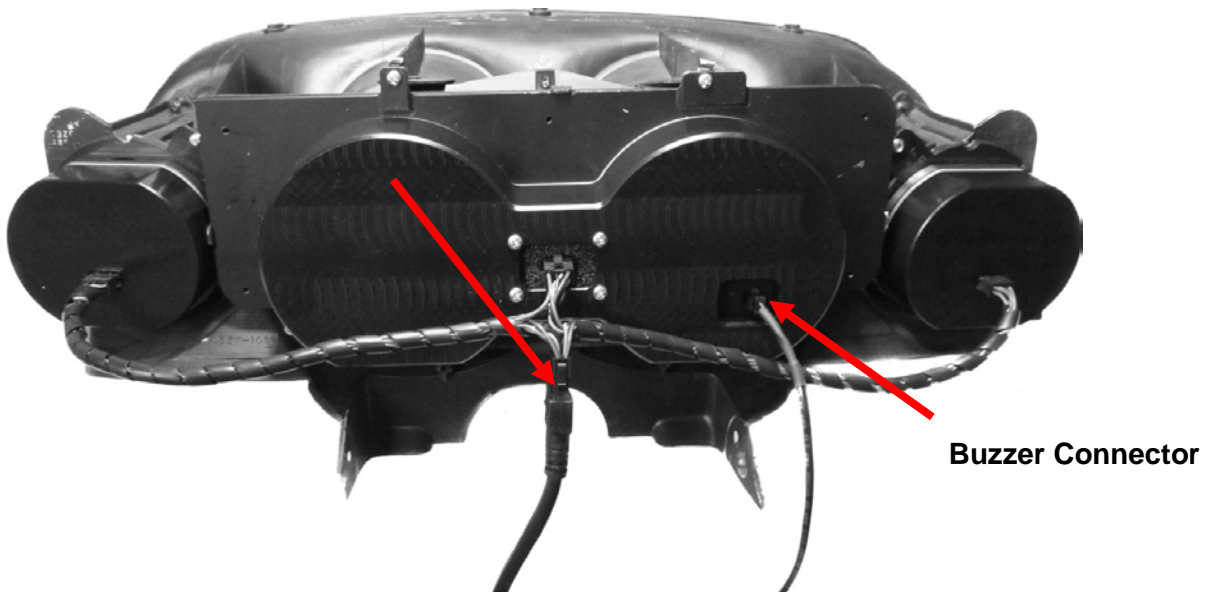

7. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106