



HDX-70D-CLG

Dakota Digital HDX Instrument Installation For 1970-74 Dodge Challenger, Plymouth 'Cuda with Rallye dash

Your new HDX-70D-CLG kit includes:

HDX Display






Installation

Switch Assembly


1. Remove the stock plastic bezel from the dash. Retain all factory hardware for reassembly.



2. Remove the stock gauge cluster by removing the four (4) screws and retain the hardware for reassembly.

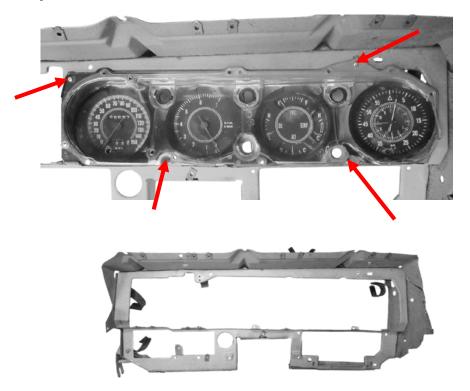


3. Mount the HDX system to the dash by reusing the four (4) screws that held the factory cluster.

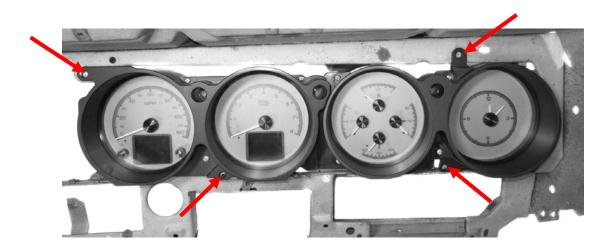


4A. This system comes with two options for the turn signals and brake indicator. You can have the indicators located in the faceplate of your new HDX display, and/or arrows in your vehicle's stock locations. To use the new faceplate indicators, follow the wiring instructions found in the main HDX manual

To optionally use the stock locations, do not wire to the HDX control box. Instead, use the provided two-wire harnesses. The harnesses plug directly into the connectors on the back side of your new HDX system:

WHITE\GREEN wire to INDICATOR CIRCUIT WHITE\BLACK wire to CHASSIS GROUND

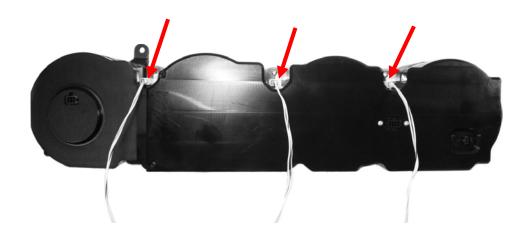

4B. Attach the provided main harness, clock harness, and buzzer (optional for audio feedback) to the back of the HDX system and carefully route the open ends to the control box mounting location.

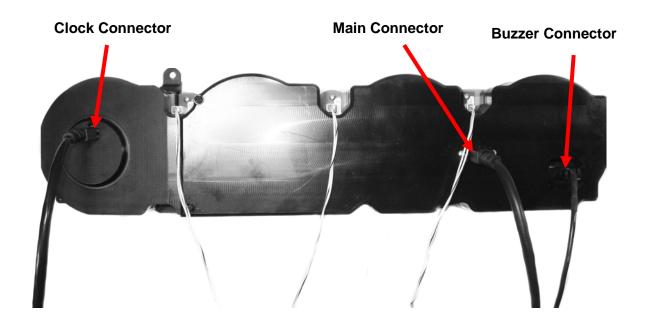

5. Re-install the gauge bezel to the dash using the factory hardware and refer to the main manual for wiring instructions to complete the HDX installation.



MARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107

www.dakotadigital.com dakotasupport@dakotadigital.com Phone (605) 332-6513 Fax (605) 339-4106

© Copyright 2018 - Dakota Digital