



RTX-60C-PU

Dakota Digital RTX Instrument Installation
For 1960-'63 Chevy Pickups

Your new RTX-60C-PU kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Switch Assembly



7x Screws



Foam Tape




Main Harness


Control Box

Installation


1. Remove the stock gauges from the dash. Remove the seven screws holding the gauges to the bezel on the back of the system

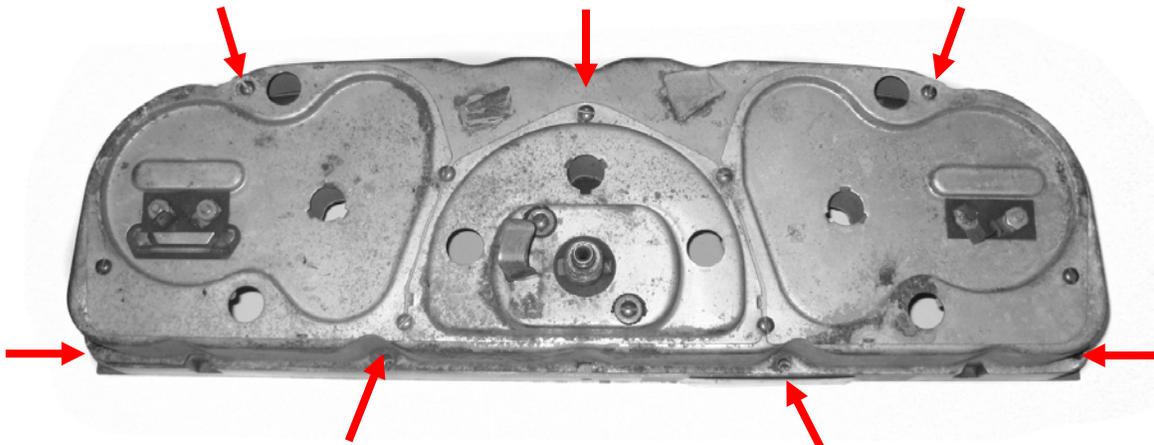


2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be set aside. Cut the supplied foam tape into four pieces, so each is about two inches long. Cut them lengthwise to make eight thin strips; stick the foam strips on the angled part of the inside edge of the bezel. The lens will compress against any foam above the edge, which helps prevent lens rattles.

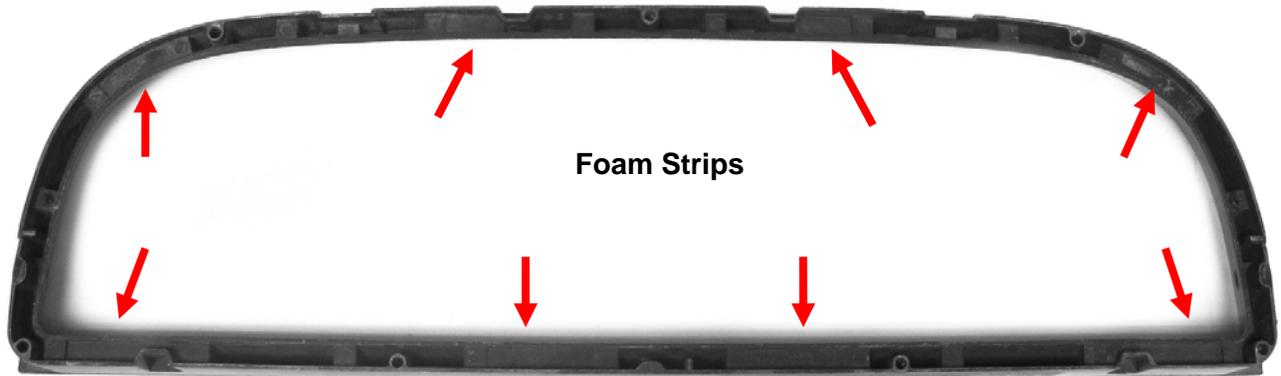


3. Secure the RTX system to the bezel with the seven supplied screws.

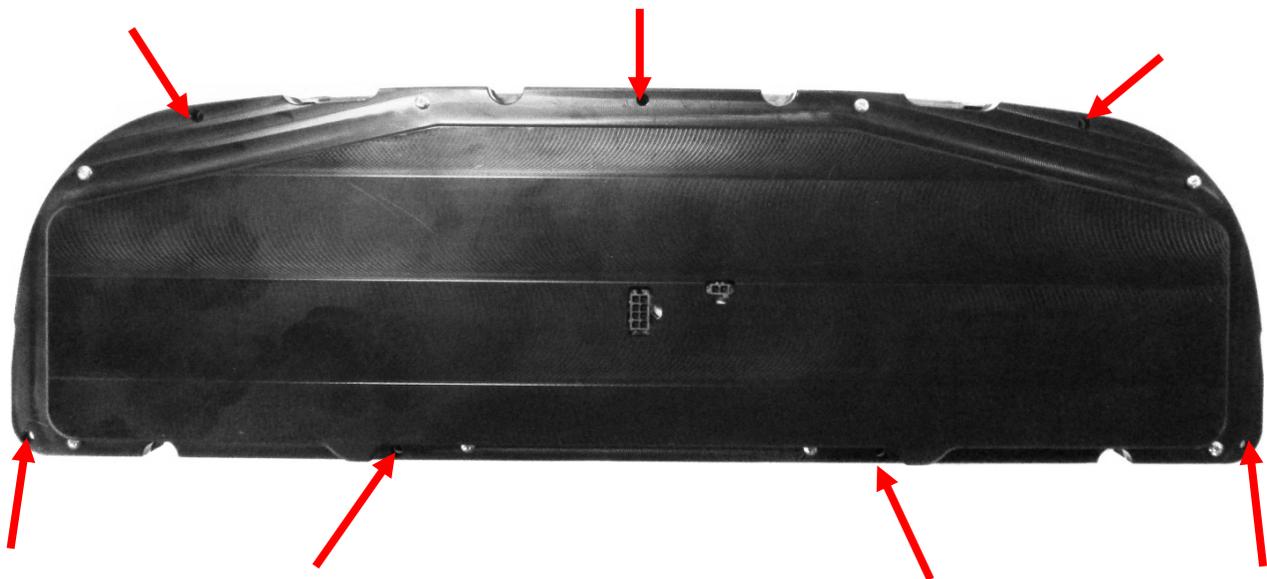

4. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the RTX system.

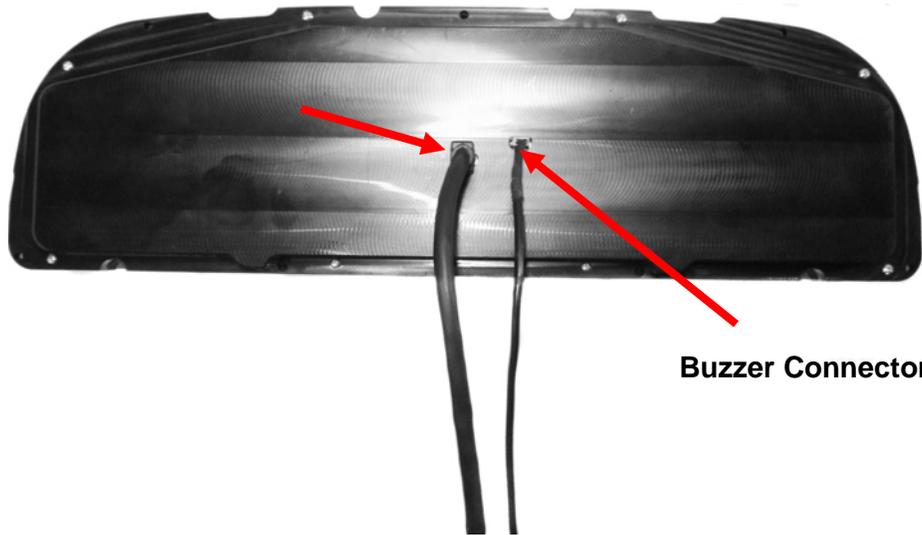

5. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the RTX installation.

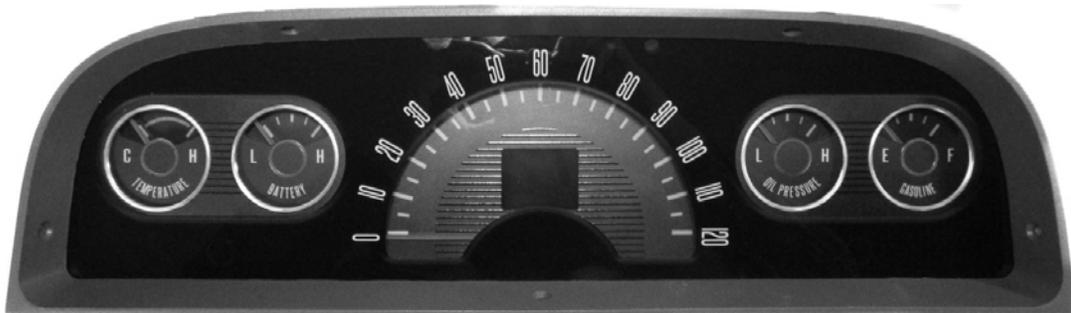

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2018 - Dakota Digital