



# VHX-1020

## Dakota Digital VHX Instrument Installation Triple Round Universal System

Your new VHX-1020 kit includes:

### VHX Displays



### Universal Sensor Pack




Switch Assembly

Control Box

(2x) 36" CAT5 Cables

(1x) 12" CAT5 Cable


### Dimensions:

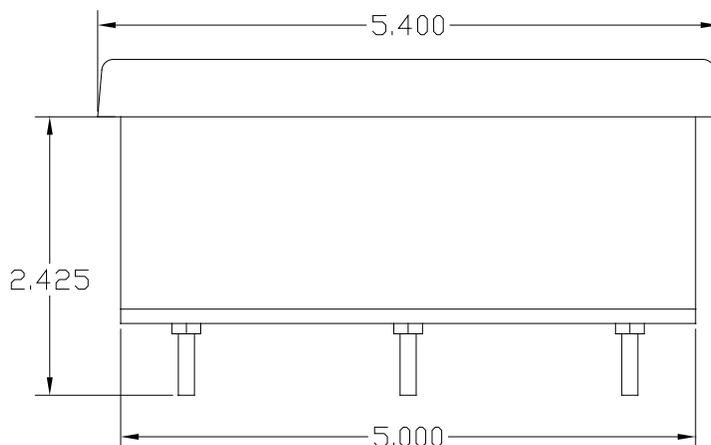

## Installation

1. First, you will need to make three, round, five-inch diameter openings in the dash or desired mounting location. Each gauge bezel should sit flush with the surface of the dash. Ensure there is at least 2.5" of depth behind the gauge openings for adequate clearance.

5" diameter hole

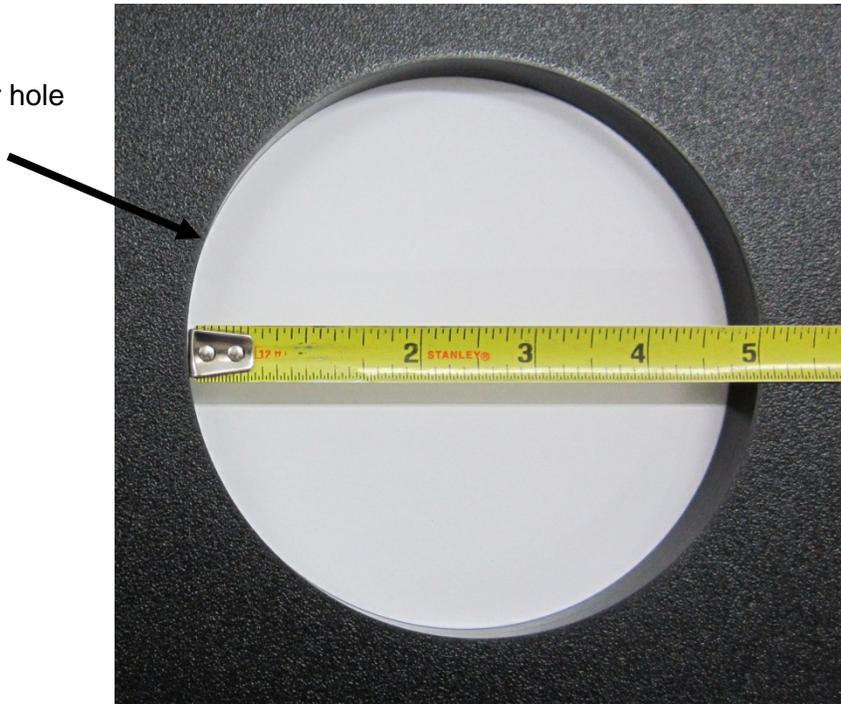

2. Remove the protective tape and insert one gauge at a time into a hole and secure the gauge using the supplied clamps and thumb nuts. Note: for easier alignment, start with the center gauge of your choosing and align/straighten each gauge before tightening the thumb nuts all the way. Speed and Tach each require three clamps while the Quad gauge uses four.





4. System installation is complete; refer to the main manual for wiring instructions to complete the VHX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106