

VHX-1021

Dakota Digital Universal VHX Instrument Installation

Your new VHX-1021 kit includes:

VHX Display

Universal Sender Pack



(5x) L-Brackets and Thumb Nuts





Switch Assembly










Control Box

Installation

1. Use the provided template to mark out the opening needed to fit the VHX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

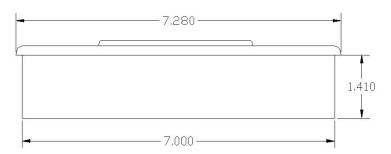

2. With the appropriate opening cut, place the VHX display into the dash and attach the five (5) L-brackets to the back of the display using the provided thumb nuts.





Attach the provided CAT5 Cable to the back of the VHX
display and carefully route the other end to the control box
mounting location. Remove the protective tape from the
lens and refer to the main manual for wiring instructions.



▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.