




# VHX-1023

## Dakota Digital Universal VHX Instrument Installation

Your new VHX-1023 kit includes:

VHX Display

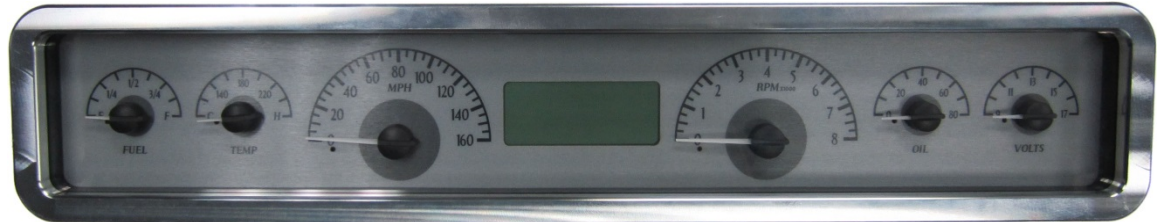

Universal Sender Pack



Switch Assembly

Installation Manuals and Cutout Template



CAT5 Cable




(5x) L-Brackets and Thumb Nuts

(5x) Mounting Studs





(5x) Nuts and Lock Washers




Control Box

## Installation

1. Use the provided template to mark out the opening needed to fit the VHX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately 2 1/8" of depth behind the dash.

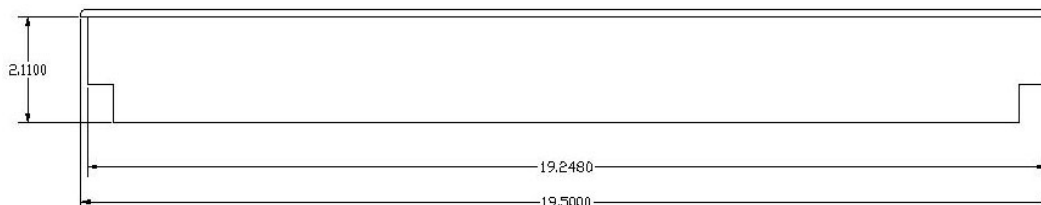


2. With the appropriate opening cut, choose the best locations for using 4-5 of the provided L-brackets to secure the VHX system to the dash. Remove the existing screws in those locations and secure the studs in place of the screw by using the lock washers and nuts.

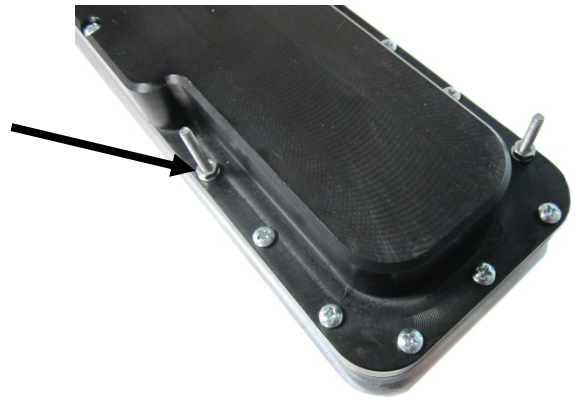

3. Place the VHX display into the dash and attach the L-brackets to the back of the display using the provided thumb nuts.



4. Attach the provided CAT5 Cable to the back of the VHX display and carefully route the other end to the control box mounting location and refer to the main manual for wiring instructions.

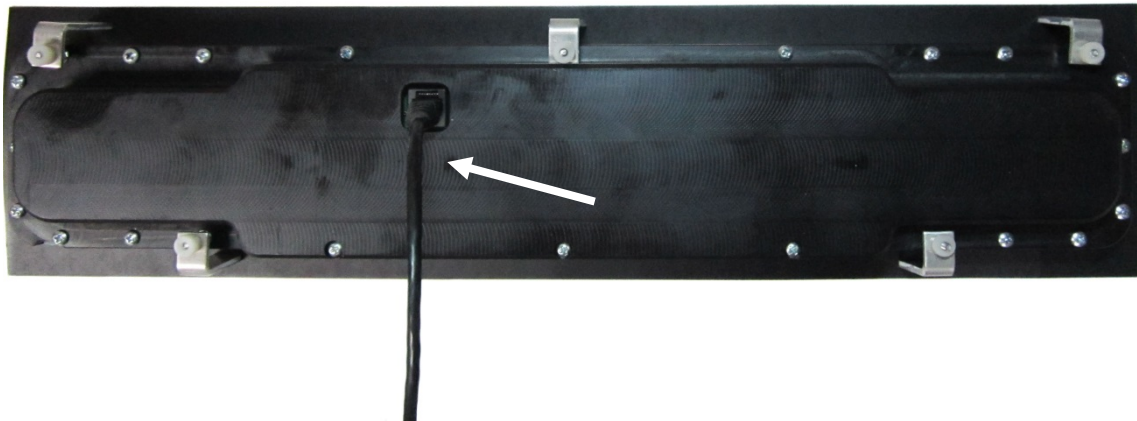

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.