



# VHX-55J

Dakota Digital VHX Instrument Installation  
For 1955-'86 Jeep

## VHX Display



- (4x) 4-40 Lock Washers
- (4x) 4-40 Thumb Nuts
- (2x) Aluminum Brackets

Your new VHX-55J kit includes:



Universal Sender Pack



Installation Manuals



Control Box




## Installation


Switch Assembly

CAT5 Cable

1. Remove the stock gauges from the dash. The only factory hardware to be re-used will be the four palnuts securing the main gauge to the dash.
2. Using the four palnuts kept from Step 1, secure the Dakota Digital main display to the back of the dash.

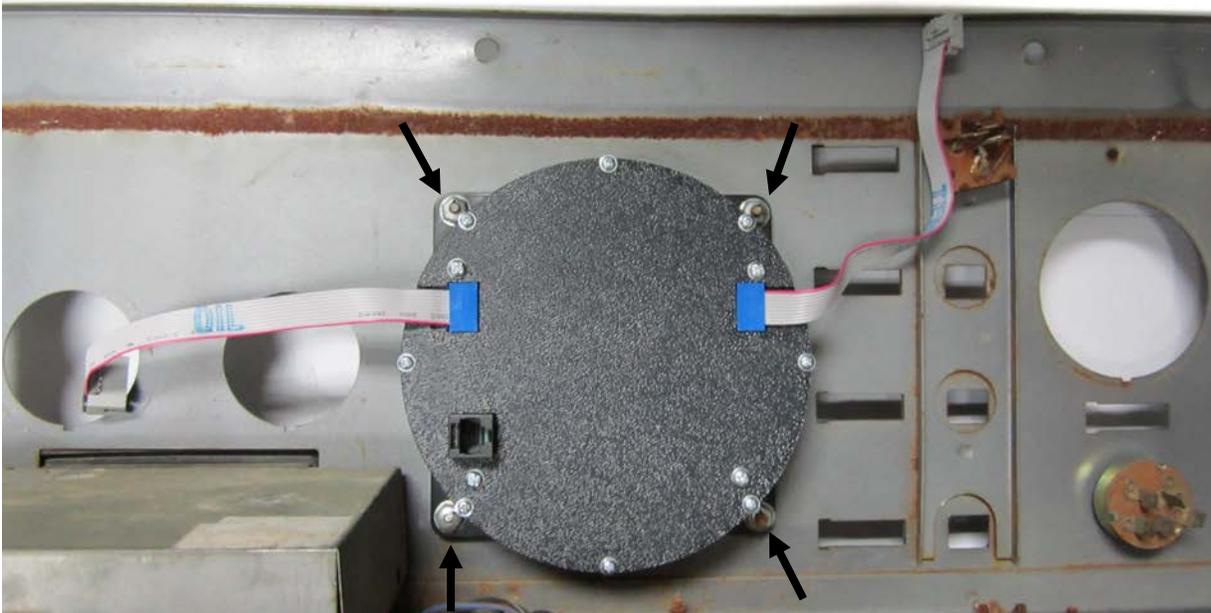


- Slide the temperature gauge through the opening from the front. Using the provided lock washers, thumb nuts, and bracket, secure the gauge. Pay attention to the orientation of the gauge to keep the gauge at the proper reading level. Repeat this step for the oil pressure gauge.

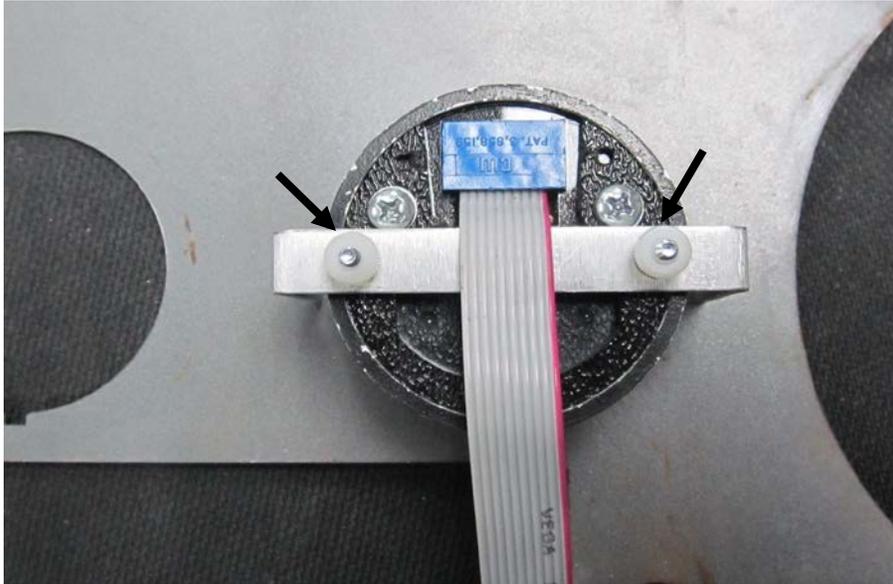

- Connect the quick disconnect ribbon cables to their respectively labeled counterpart. Note: (OIL-OIL) and (TEMP-TEMP).



5. Connect the CAT5 cable to the system. As the assembled cluster is installed into the dash, take care when routing this cable to the control box.

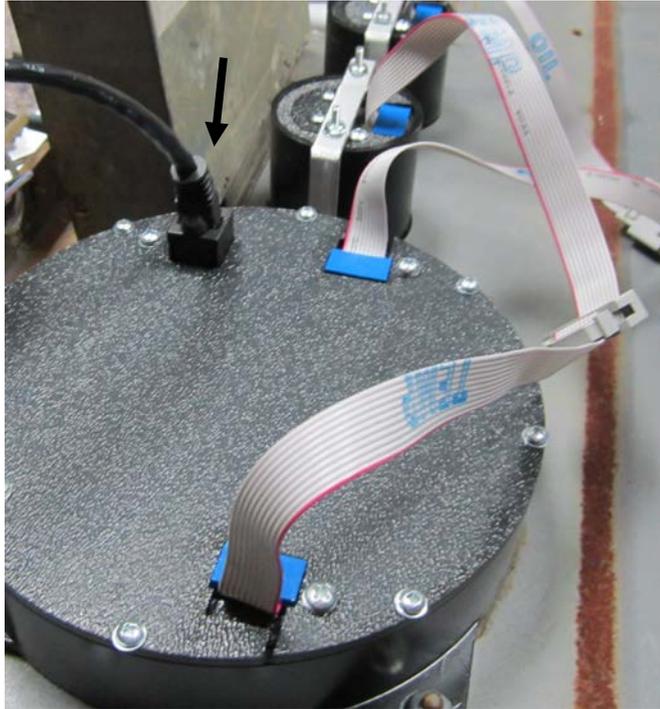

6. Refer to the main manual to complete the rest of the VHX wiring installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.