

VHX-64C-PU

Dakota Digital VHX Instrument Installation For '64-66 Chevy Pickup Systems

Your new VHX-64C-PU kit should include:

VHX Display









Switch Assembly



CAT5 Cable




(7) 6-20x1.00" Screws & Lock Washers



Control Box

Installation

1. Remove the stock gauges from the dash. Remove the seven screws holding the gauges to the bezel on the back of the system.

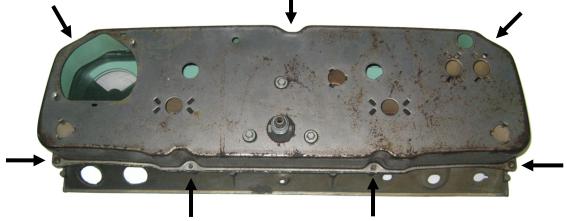



2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be discarded. Now is a good time to clean the bezel and remove any dirt or old lens gasket material.



3. Cut the supplied foam tape into six pieces, so each is about two inches long. Stick the foam strips on the angled part of the inside edge of the bezel. The lens will compress against any foam above the edge, which helps prevent lens rattles.



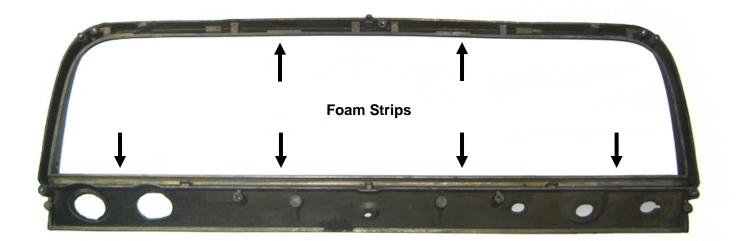

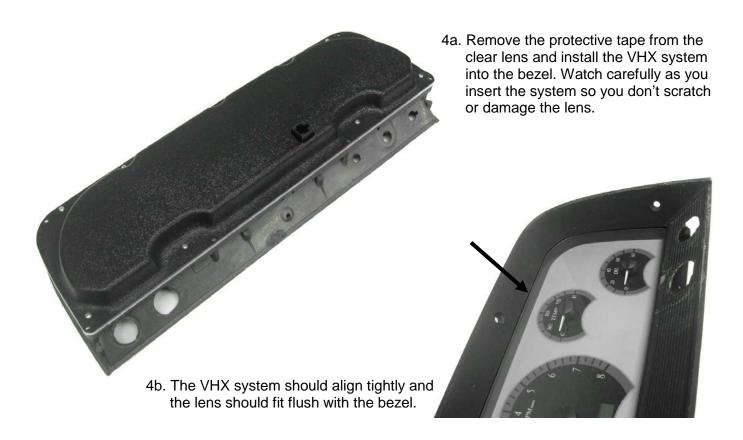

5. Secure the VHX system to the bezel with the seven 6-20 x 1.00" screws and lock washers provided.





7. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the VHX installation.



MARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.