

## VHX-67F-PU

Dakota Digital VHX Instrument Installation For 1967-'72 Ford Pickups

Your new VHX-67F-PU kit includes:



## **Universal Sender Pack**



(1) 36" CAT5 Cable


**Control Box** 

## Installation


1. First you will need to remove the stock gauge cluster. To do so, remove the stock bezel by removing the eight (8) Phillips screws on the top and bottom edge as indicated in the photo. Also disconnect the wiring and speedometer cable on the back side. Retain hardware for reassembly.




2. Remove the stock gauge cluster from the bezel by removing the eight (8) mounting screws. For a plastic gauge bezel, retain the original hardware for reassembly. For a steel gauge bezel, use the hardware included with the kit.

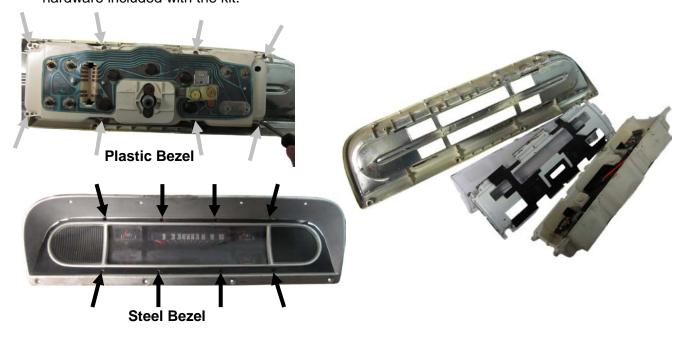

3. Mount the VHX system to the gauge bezel. For the plastic bezel, use the stock eight (8) screws mounting from the backside as shown in the picture below on the left. For the steel bezel, use the provided eight (8) 6-32 x 3/8" black screws from the front as shown below on the right. Make sure to partially thread all screws before final torqueing to perform proper alignment for all mounting points.

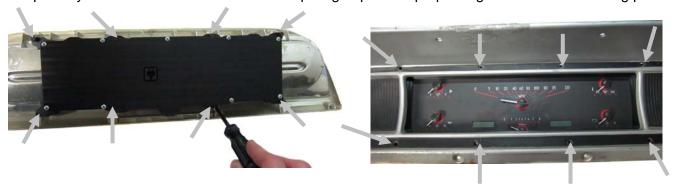

4. As you re-install the gauge bezel to the dash using the stock hardware, attach the provided 36" CAT5 cable to the back of the VHX system.

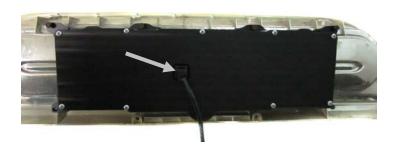

5. Refer to the main manual for wiring instructions to complete the VHX installation.





▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North Sioux Falls, SD 57107 www.dakotadigital.com

Phone (605) 332-6513 Fax (605) 339-4106

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.