



# VHX-68C-IMP

Dakota Digital VHX Instrument Installation  
For 1968 Chevrolet Impala and Caprice

Your new VHX-68C-IMP kit includes:

## VHX Display



Universal Sender Pack



Switch Assembly



36" CAT5 Cables

Indicator Harness




(2) 5/8" Screws  
(6) 1.25" Screws



(4) Warning Indicator  
Black Outs



Gear Indicator  
Black Out



Control Box

## Installation

1. First, remove the stock gauge cluster from the dash. Retain the factory hardware for reassembly.




2a. Remove the stock gauges from the bezel; you can also remove the factory clear lens on the front of the bezel or it can be left in place if desired.



2b. The stock gear indicator and BRAKE warning can be used or they can be blacked out by peeling the protective paper off and silconing the blackout plates directly behind the openings. To use the BRAKE indicator; the stock light guide must be used.

3. Mount the VHX system to the stock bezel using the eight (8) supplied screws.

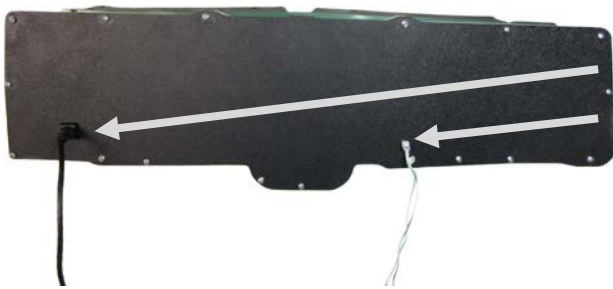

4. Attach the provided CAT5 cable to the back of the VHX system and carefully route the open end to the control box mounting location. If using the BRAKE indicator; connect the provided harness and make the following connections:  
WHITE\GREEN wire to BRAKE CIRCUIT  
WHITE\BLACK wire to CHASSIS GROUND

5. Re-install the gauge bezel using the factory hardware and refer to the main manual for wiring instructions to complete the VHX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106