



VHX-73J-WAG

Dakota Digital VHX Instrument Installation

For 1973-'83 Jeep Wagoneer, 1984-'85 Jeep Grand Wagoneer, 1973-'85 Jeep J-Trucks

Your new VHX-73J-WAG kit includes:

VHX Display



Universal Sender Pack



Installation Manuals



(5) 1" Screws


(2) Blinker Harness



Switch Assembly

CAT5 Cable

Control Box

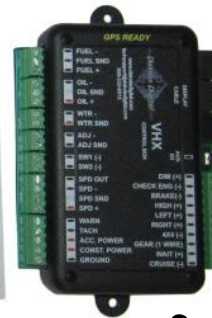

Installation


1. Remove the stock gauge cluster from the dash. Retain all hardware for reassembly.




2. Separate the gauges from the bezel so you are left with a bare bezel.





3. Cut the small tabs on the back face of the stock bezel so the VHX system can sit flat.

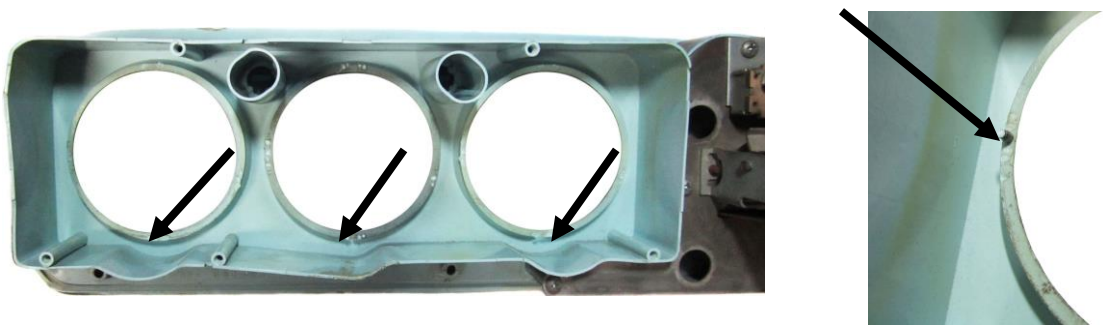


4. Mount the VHX system to the stock bezel using the supplied mounting screws.

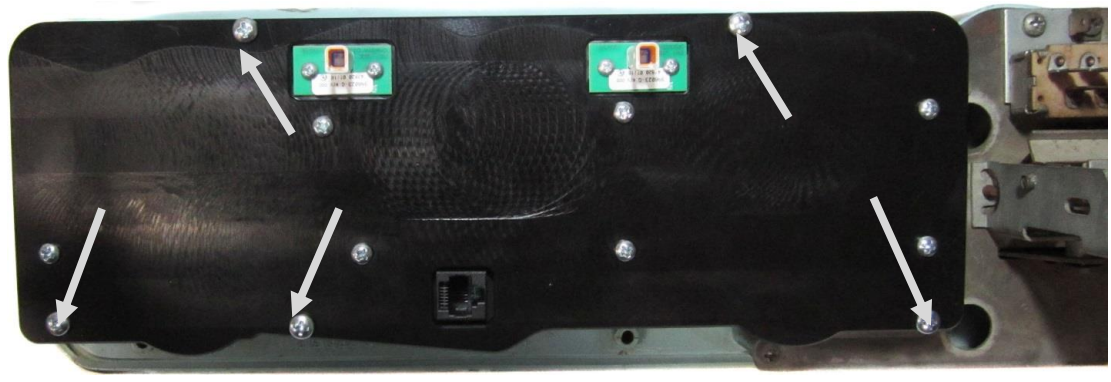

5. This system comes with two options for the turn signal arrows in your vehicle's stock turn signal locations. Do not wire the turn signals to the VHX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into connectors on the back side of your new VHX system. Connect the wires from these harnesses to your turn signal circuit and ground as shown below. Doing this will light green LED bulbs, located in the original locations of your dash panel, when turn signals are active. Make sure to check left and right to verify they are wired correctly.

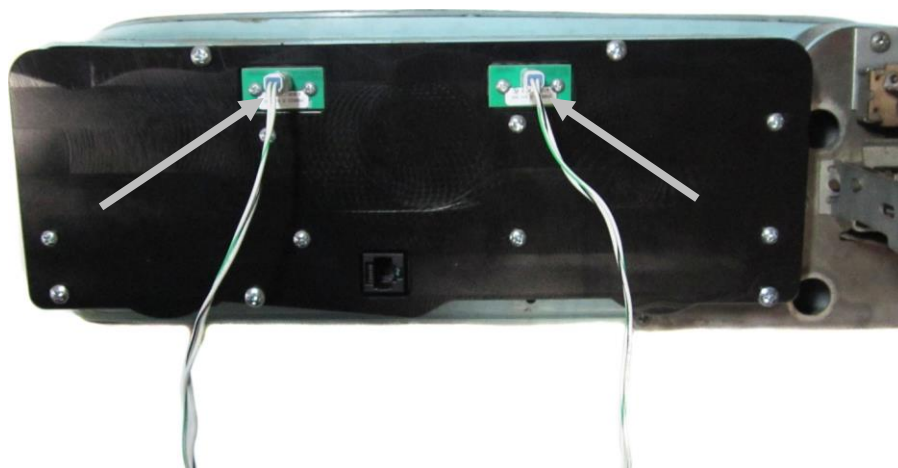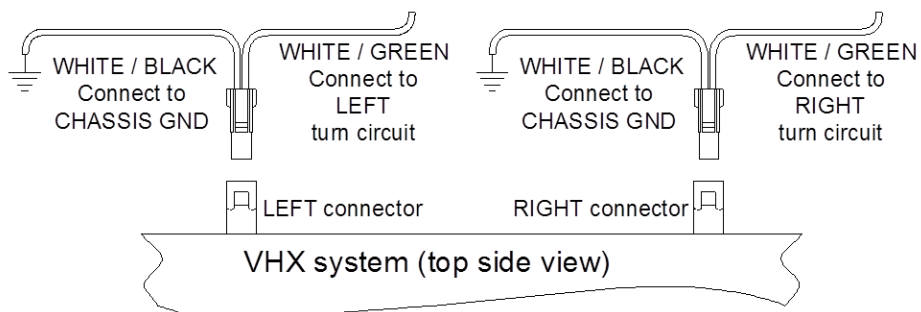

6. Connect the provided CAT5 cable to the rear of the VHX system.

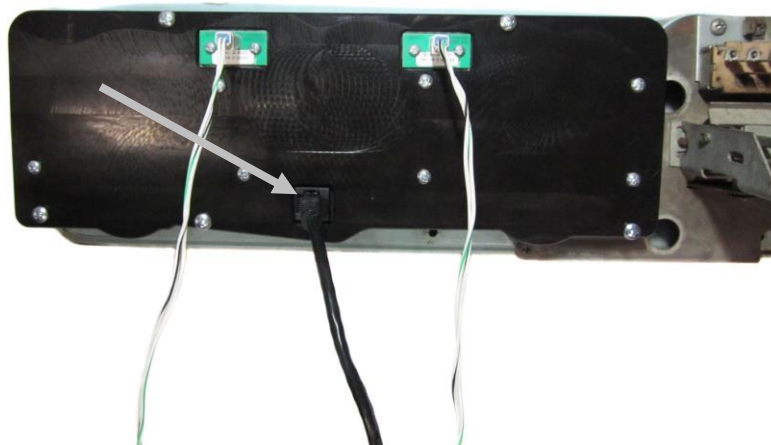

7. The gauge panel is now ready to re-install into the vehicle using factory hardware; take care when routing the CAT5 cable to the control box mounting location. Refer to the main manual to complete the VHX installation.



⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106