



# VHX-78C-VET

Dakota Digital VHX Instrument Installation  
For 1978-'82 Corvette

Your new VHX-78C-VET kit includes:

### VHX Displays



### Universal Sender Pack



### Installation Manuals



(5) 8-18 x 1" Screws

### Control Box



(3) Block-Off Lenses



### Clock Switch Harness



### Switch Assembly



- (1) 60" CAT5 Cable
- (1) 36" CAT5 Cable
- (2) 12" CAT5 Cable




### Clock Switch

## Installation

1. Remove the stock main gauge cluster and the center gauge cluster from the dash and save all center gauge hardware for reassembly.




2. Remove the stock gauge assembly from the center gauge bezel; the only items to be reused are the front bezel and the gauge mounting hardware. Now is a good time to clean or refinish the bezel.

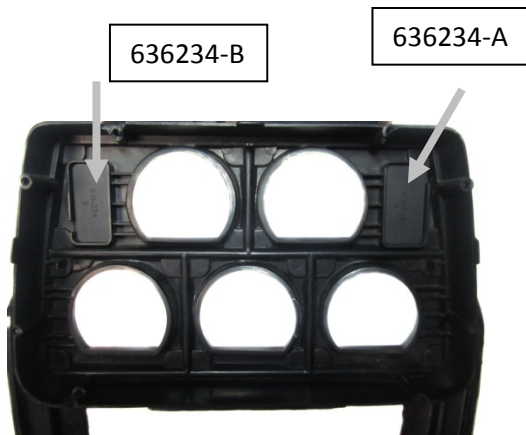

3. Peel the paper off the two block-off lenses needed (636234-A and 636234-B) and place them shiny side down in the two rectangular openings. Use silicone to hold them in place and avoid handling until the silicone has cured.




4. With the block-off lenses in place, position the VHX center gauges over the back of the center bezel and secure the system by using the four (4) stock mounting screws.

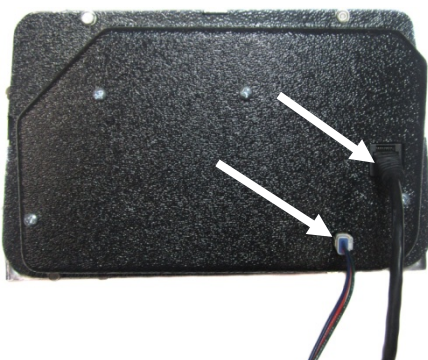

5. Attach the provided 60" CAT5 Cable and the 3-Pin Switch Harness to the back of the VHX display. Carefully route the other ends to the control box mounting location. Refer to manual 650360 for switch wiring instructions before reassembly of the center gauges to the dash using stock hardware.

6. Connect one of two 12" CAT5 cables to the Tachometer, and the other end to either port on the Speedometer, connecting the two halves; the other 12" CAT5 cable goes from the center indicator connection to an open port on either the Speedometer or Tachometer. Finally, with the 36" CAT5 cable, connect one end to the last open port on the Speedometer or Tachometer, and as the assembled cluster is installed into the dash, carefully route the other end of the cable to the control box mounting location and use the five (5) supplied 1" screws to mount the assembly to the dash.

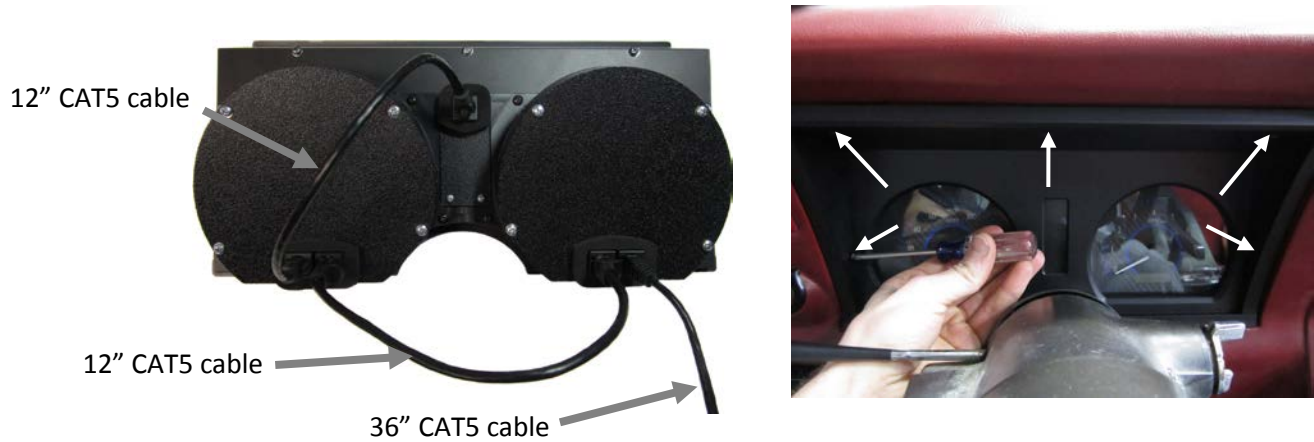

7. Refer to the main manual for wiring instructions to complete the VHX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.