



VLC/VLK-58C-VET

Dakota Digital VHX Clock Installation
For '58-'62 Chevy Corvette

Your new VLC/VLK-58C-VET kit includes:

VLC Clock



4X 4-24 x 5/8" Mounting Screws

Clamping Backplate



CAT5 Cable




VLC Power Harness

Installation Manuals




VLK Clock

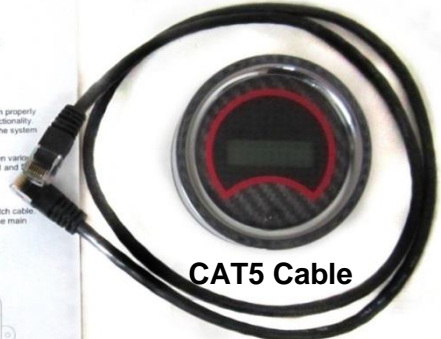

CAT5 Cable

1/8" Clamping Backplate

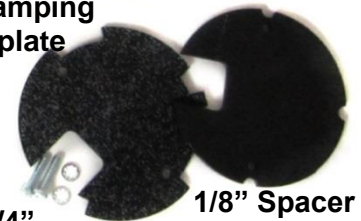

1/8" Spacer Subpanel

2x 6-32 x 3/4" Screws & Lock Washers

VLK Installation

1. Remove the clock bezel from the car. Set the 1/8" Spacer Subpanel on the back of the clock, and slide the assembly into the front of the bezel.





2. Looking at the backside, align the 1/8" Clamping Back plate ensuring the connector is at the top. Check that the textured side is facing out.



3. Thread the two (2) provided lock washers and screws into the locations shown, clamping the system together.




4. Connect the CAT5 cable to the clock. Route this cable back to the control box and reinstall the bezel in to the dash and refer to the main Installation Manual to complete the VHX clock setup.

5. Reinstall the bezel in to the dash and refer to the main Installation Manual to complete the VHX clock setup.




VLC Installation

1. With the Clock bezel removed from the car and the clock removed from the bezel; slide the VLC clock into the bezel from the front.

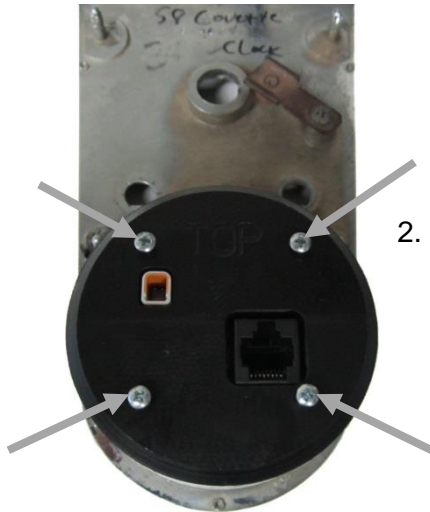

2. Mount the VLC clock by placing the backplate over the rear of the VLC and using the four (4) provided screws

3. Connect the CAT5 cable and the 12V harness to the clock. Reinstall the bezel in to the dash and refer to the main Installation Manual to complete the clock setup.

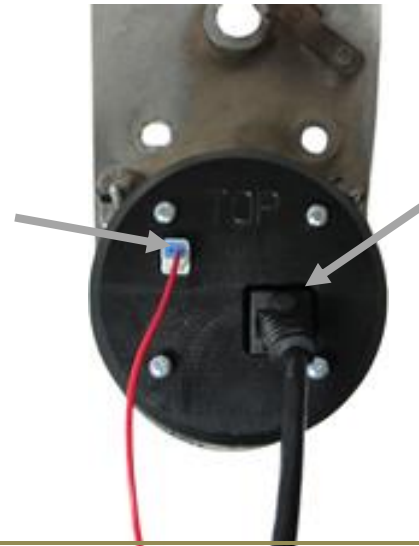

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.