


# Odyssey

Manufactured by **Dakota Digital**

## Series II HLY-3028 2-3/8" TACHOMETER

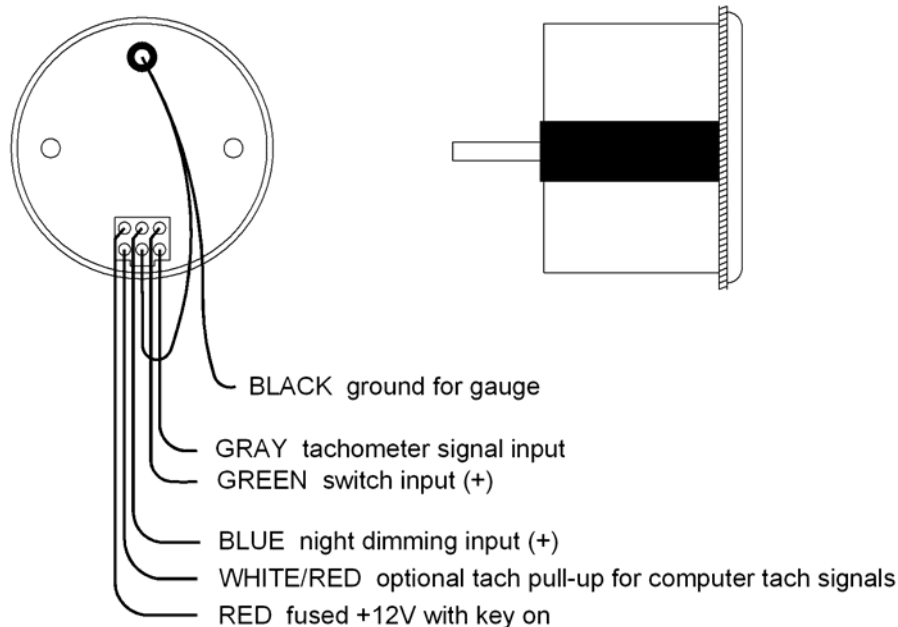

### SETTING THE WARNING LIMITS, CYLINDER SETUP, AND UPDATE SPEED:

The setup is done using the function switch. The tachometer can be calibrated two different ways.

**The green wire is used to enter and change the warning settings. You will need a switch connected with one side to the green wire and the other side to 12 volts.**

1. To enter the set mode, turn the key on with the switch pressed. The gauge will display "SEt".
2. Release the switch. The gauge will display "HI" and then change to the current hi rpm warning point. (2800 – 15,200)
3. Each time you momentarily press the switch the warning will increase 200rpm.
4. When the desired warning value is displayed, keep the switch held for about 2 seconds. The gauge will display "CYL".
5. Release the switch. The gauge will display the current cylinder setting. (1-15)
6. Each time you momentarily press the switch the number will increase by 1.
7. When the desired cylinder setting is displayed, keep the switch held for about 2 seconds. The gauge will display "SPd".
8. Release the switch. The gauge will display the current update speed. (slow "SLO" or fast "FSt").
9. Each time you momentarily press the switch the display will change.
10. When the desired update speed is displayed, keep the switch held for about 2 seconds. The gauge will display "--".

Turn the key off.

### MOUNTING:

The gauge requires a round hole 2-1/16" in diameter. It should be inserted into the opening from the front and the U-clamp will be installed from the back. Tighten the two nuts on the U-clamp so that the gauge is secure. Gauge depth to the back of the case is 1-1/2". Gauge depth including the mounting studs is 2-3/8".

## **Introduction:**

The Odyssey Series II gauges from Dakota Digital, Inc. incorporates the reliability and quality of our standard gauges, along with several unique features and easy mounting. These features include:

- Industry standard 2-1/16" gauge size.
- Weather-proof construction.
- 250-18,000 rpm range with 10 rpm resolution. (100 rpm res. above 10,000)
- Adjustable cylinder selection (1-15).
- Adjustable warning point to flash the gauge readout.
- High rpm recall.
- Microprocessor stabilized readings.
- Night dimming with lens label lighting.
- Non-Glare, high contrast lens
- High Visibility VFD display for sunlight readability.

## **POWER**

Connect the red wire from the main harness to accessory power from the ignition switch.

Never connect this to a battery charger alone. It needs to have a 12 volt battery connected to it. Battery chargers have an unregulated voltage output that will cause the system to not operate properly.

## **GROUND**

The black wire is the main ground for the gauge. A poor ground connection can cause improper or erratic operation. The black wire loops over to the top screw on the back of the case. This ensures a good case ground connection.

## **TACHOMETER**

The gray wire connects to the vehicle tach signal. On point type and pointless distributors connect to the negative side of the coil. This will sometimes be labeled TACH or DIST. On distributorless ignition systems, connect to the tach output wire or to the negative wire of one of the coils. On MSD ignition systems connect to the tach output terminal.

For tach signals integrated into a vehicle wiring harness, consult a service manual to determine the color code and location of the tachometer signal. The tachometer signals from some engine computers require a weak 12 volt pull-up for correct operation of the gauge. Tie the gray and white/red wires together if this is needed.

The tachometer is adjustable from 1 to 15 cylinder signals and calibration is discussed below.

The gauge displays the engine rpm $\times$ 10 from 250 – 9990 and rpm $\times$ 1000 for 10,000 – 18,000. 2500 rpm would be displayed as "250" and 11,400 rpm would be displayed as "11.4". The decimal point indicates the reading has changed from rpm $\times$ 10 to rpm $\times$ 1000.

The gauge can be set for a slow update, which changes the displayed reading every 1/2 second, or for a fast update, which changes the displayed reading every 1/8 second. The slow update rate is recommended for most applications since rapidly changing numbers can be difficult to read.

### **For 2004+ Harley and 2003 V-Rod**

The tachometer signal will come from the negative side of the ignition coil. Blue/Orange for the front cylinder, Yellow/Blue for the rear cylinder, connect the tachometer input to **only one** of these two wires, set the tachometer for a 1 cyl signal, see Tachometer Set-up for instructions.

## **FUNCTION SWITCH/RECALL HIGH RPM**

The function switch is connected with one wire to a 12 volt source and the other wire to the green wire from the tachometer harness. The function switch is used for calibration and to recall the highest rpm reached since the last reset. Pressing the function switch while the gauge is running will display "HI" and then the current high rpm. This will repeat every 2 seconds. Holding the function switch for 8 seconds will reset the high rpm.

The high rpm recall is updated every 1/8 second regardless of the display update rate. This allows it to catch the highest rpm which might be missed at the slow update rate.

## **NIGHT DIMMING**

Your display system has a dimming feature that dims the display intensity. Normally the system is at full brightness for daytime viewing. When the blue wire has 12 volts the display intensity will be reduced. Connect this to a park light or tail light circuit, then whenever the headlights are on the display will dim. To have the system at full brightness all of the time, leave the blue wire disconnected.

## TROUBLESHOOTING GUIDE.

<b>Problem</b>	<b>Possible cause</b>	<b>Solution</b>
Gauge will not light up	Red wire does not have power. Black wire is not getting a good ground. Gauge is damaged.	Connect to a location that has power. Connect ground to a different location. Return gauge for repair.
Gauge lights up, but displays "Er3"	Cylinder setting is invalid	Gauge must be recalibrated for correct number of cylinders. (see instructions)
Gauge lights up, but displays "Er4"	Gauge update rate is invalid	Gauge display update must be reset. (see instructions)
Gauge lights up, but displays "Er5"	Gauge warning setting is invalid.	The rpm warning point must be reset. (see instructions)
Gauge lights up, but rpm will only show zero.	Gray wire is not connected properly. Pull-up wire needed on tach signal. Gauge is not getting a tach signal from the engine. Tach output from ignition module not working. Gauge is not calibrated	Check connection from gray wire to engine tach signal. Connect White/Red wire and Gray wire together. Check location that the tach signal wire is connected at the ignition system. Check for 4-8 V AC on tach signal wire, Replace ignition module if necessary. Gauge must be recalibrated (see instructions).
Tach reading is erratic or jumps around.	Tach signal wire is loose or broken. Update rate is too fast. Poor ground connection.	Check all wire connections and cables for breaks. Reset display update speed to slow. Check ground on tachometer and ignition/engine. Gauge must be calibrated.
Tach reading is incorrect.	Gauge is not calibrated correctly.	Gauge must be calibrated.
Gauge will not dim.	Blue wire is not connected correctly.	Check wiring. Blue wire should have 12 volts to dim gauge.
Gauge remains dim at all times. dim.	Blue wire is getting power all of the time.	Connect blue wire to a switch that has power only when the gauge should
Gauge will not go into the the SETUP mode.	Switch is not being held in during power up. Switch is not connected properly. Switch is defective. Blue wire is getting power all of the time.	Press and hold switch while powering gauge. Make sure that the switch supplies 12V to the green wire when pressed. Replace push button switch. Disconnect or ground the blue wire while doing the gauge setup.
Gauge will not display the high rpm recall.	Switch is not connected properly. Switch is defective.	Make sure that the switch supplies 12V to the green wire when pressed. Replace push button switch.

## SERVICE AND REPAIR

DAKOTA DIGITAL offers complete service and repair of its product line. In addition, technical consultation is available to help you work through any questions or problems you may be having installing one of our units.

Should you ever need to send the unit back for repairs, please package the product in a good quality box along with plenty of packing material. Ship the product by UPS or insured Parcel Post. Be sure to include a complete description of the problem, your full name and address (street address preferred), and a telephone number where you can be reached during the day. An authorization number for products being returned for repair is not needed. Do not send any money. We will bill you for the repair charges. Any returns for warranty work must include a copy of the dated invoice or bill of sale.

## **ODYSSEY SERIES DIGITAL GAUGE LIMITED WARRANTY**

DAKOTA DIGITAL (the Company) warrants to the ORIGINAL PURCHASER of this product that should it, under normal use and condition, be proven defective in material or workmanship within 24 MONTHS FROM THE DATE OF PURCHASE, such defect(s) will be repaired or replaced (at the Company's option) without charge for parts or labor directly related to repairs of the defect(s).

To obtain repair or replacement within the terms of this Warranty, the product is to be delivered with proof of warranty coverage (e.g. dated bill of sale), name, address, phone number, and specification of defects, transportation prepaid, to the factory. This Warranty is valid for the original purchaser only and may not be transferred.

This warranty does not cover nor extend to damage to vehicle electrical system. This Warranty does not apply to any product or part thereof which in the opinion of the Company has been damaged through alteration, improper installation, mishandling, misuse, neglect, or accident.

This Warranty is in lieu of all other express warranties or liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 24 MONTHS FROM DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the Company any liability other than that expressed herein in connection with the sale of this product.

The Company does not warrant that this product cannot be compromised or circumvented. THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID TO THE PURCHASER FOR THE PRODUCT.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation if incidental or consequential damage so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

***Dakota Digital***

4510 W. 61ST St. N., Sioux Falls, SD 57107  
Phone: (605) 332-6513 FAX: (605) 339-4106  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

©Copyright 2005 Dakota Digital Inc.

MAN#650196