



HDX-2014

Dakota Digital Universal HDX Instrument Installation

Your new HDX-2014 kit includes:

HDX Display



**Interconnect
Harness**

**Universal Sender
Pack**



Buzzer



Installation Manuals



**(6x) L-Brackets
and Thumb Nuts**


Main Harness





Control Box

Installation

1. Mark out two 5" openings needed to fit the HDX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

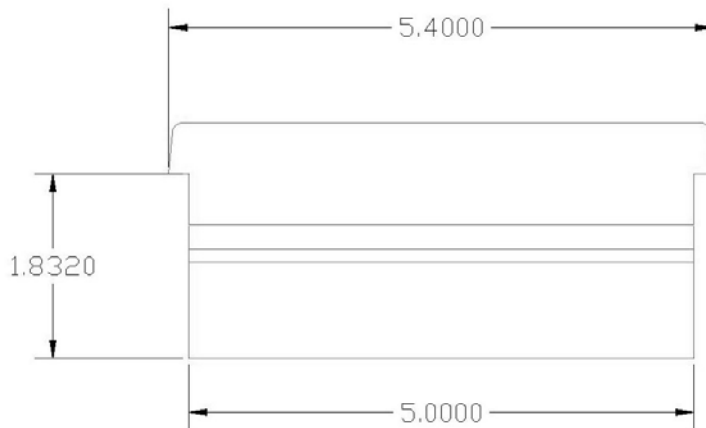


2. With the appropriate openings cut, place the HDX display into the dash and attach the six (6) L-brackets to the back of the display using the provided thumb nuts.

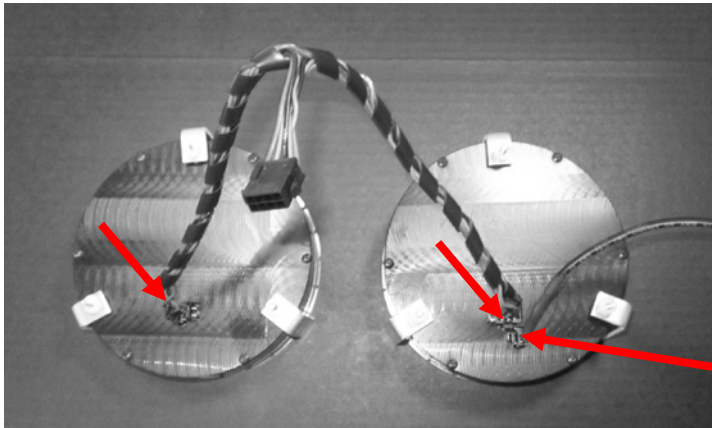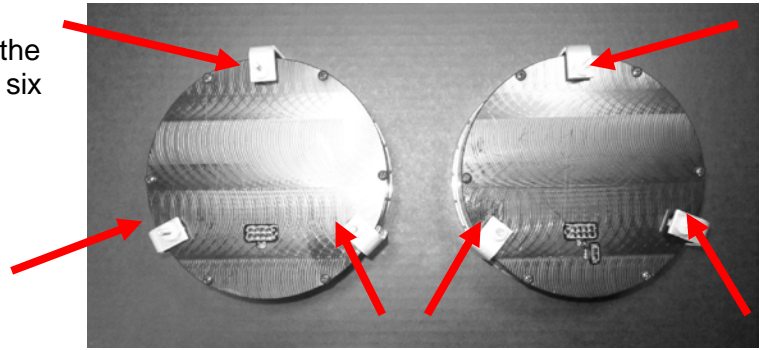

3. Connect the provided interconnect harness and the buzzer (optional for audio feedback) to the back of the HDX system.

Buzzer Connector

4. Connect the provided main harness to the interconnect harness and refer to the main manual for wiring instructions to complete the HDX installation.

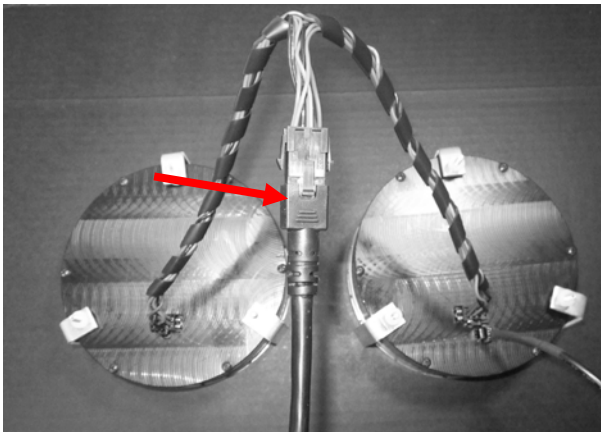

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com

dakotasupport@dakotadigital.com Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513
Fax (605) 339-4106