



# HDX-2018

## Dakota Digital Universal HDX Instrument Installation

Your new HDX-2018 kit includes:

**HDX Display**



**Universal Sender Pack**

**Buzzer**

**Installation Manuals**



**(4x) L-Brackets and Thumb Nuts**





**Main Harness**




**Control Box**

### Installation

1. Use the provided template to mark out the opening needed to fit the HDX display. Ensure there is adequate clearance behind the desired mounting location. The display unit needs approximately two inches of depth behind the dash.

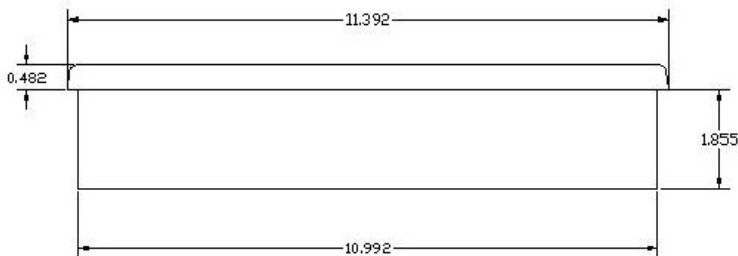


2. With the appropriate opening cut, place the HDX display into the dash and attach the four (4) L-brackets to the back of the display using the provided thumb nuts.

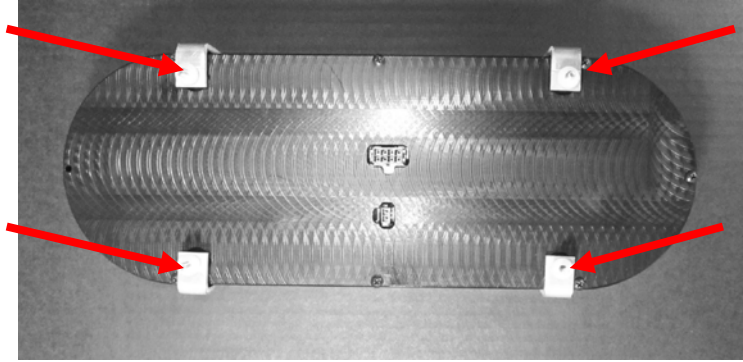


3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system.

#### Main Harness

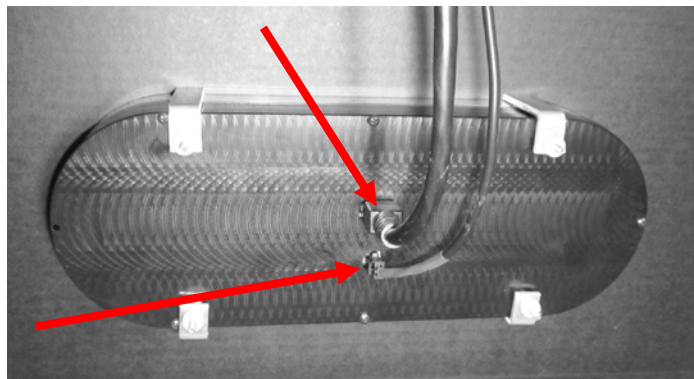

#### Buzzer Connector

4. Refer to the main manual for wiring instructions to complete the HDX installation.

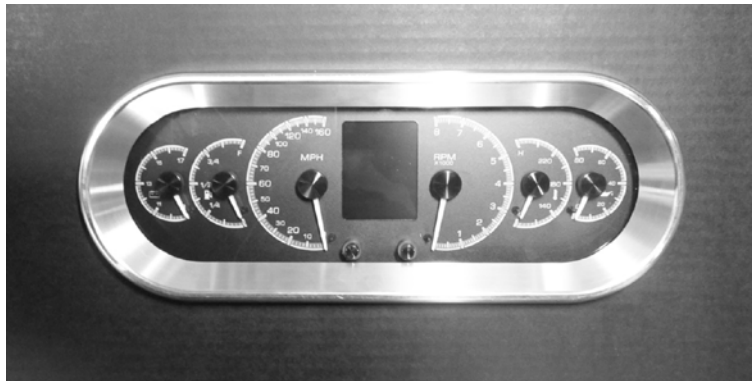

**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106