



HDX-53F-PU

Dakota Digital HDX Instrument Installation
For 53-55 Ford Pickup

Your new HDX-53F-PU kit includes:



HDX Display

Universal Sender Pack



Buzzer



Installation Manuals




Main Harness

Mounting screws



Ford Speed Adapter




Control Box

Installation


1. Remove the stock gauges from the dash by removing the four screws securing the gauges to the dash.



- From the rear of the dash; insert the HDX system into the opening and securely mount using the four 10-18x.5" screws provided. The two (2) counter sunk screws are for the upper two locations and the two (2) pan heads are for the lower two locations.

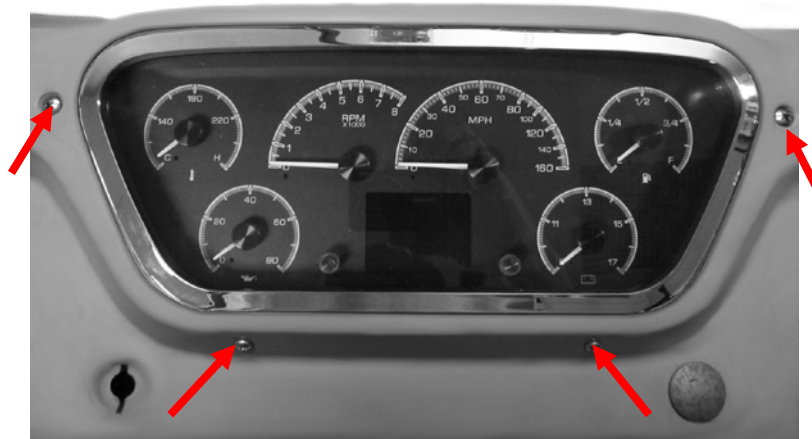

- Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

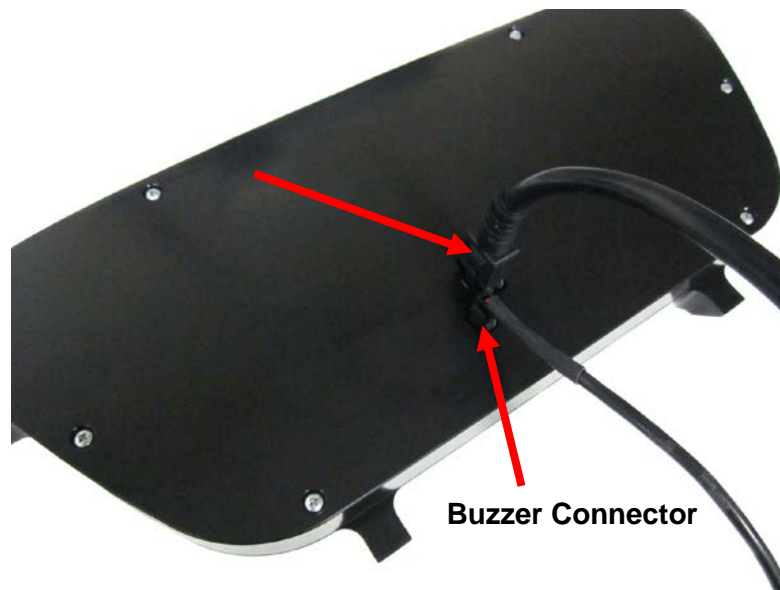

- Refer to the main manual for wiring instructions to complete the HDX installation.

⚠WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.