



# HDX-55C-PU

Dakota Digital HDX Instrument Installation  
For 1955-'59 Chevy Pickups

Your new HDX-55C-PU kit includes:

**HDX Display**



**Universal Sender Pack**

**Buzzer**

**Installation Manuals**

**Foam Tape**



**6x Lock Washers  
6x Screws**

**Main Harness**

**Control Box**




## Installation


1. Remove the stock instrument cluster from the pickup.




2. Remove the six screws holding the gauges to the bezel so the stock gauges, separator plate, and lens can be removed.

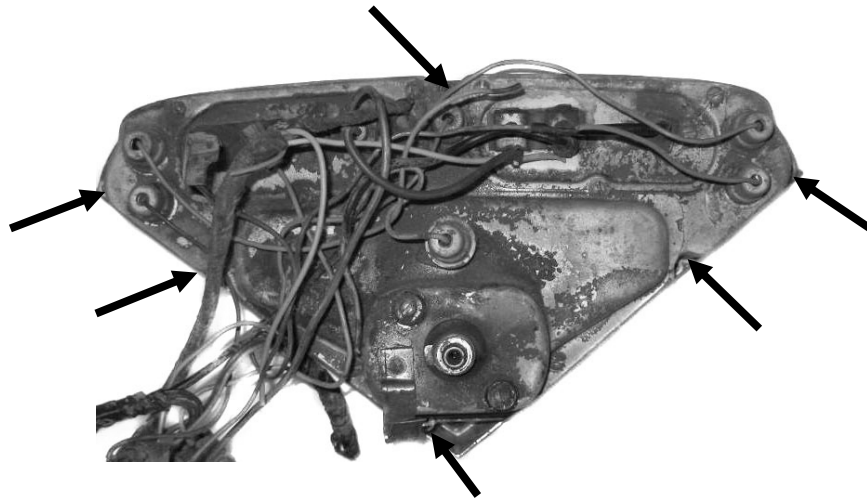


3. Next, cut the supplied foam into 1.5" long strips, and then cut the strips in half lengthwise so you have four pieces total. Install the foam blocks on top of the four bosses around the edge of the bezel to help prevent any lens rattles. The foam will compress against the lens once the system is installed.

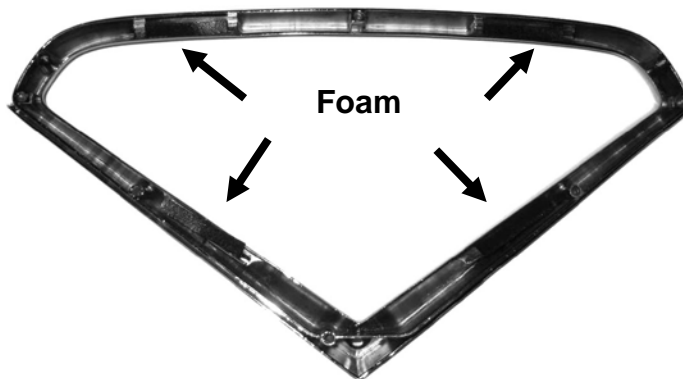

4. Secure the HDX system to the bezel with the six supplied screws and lock washers.

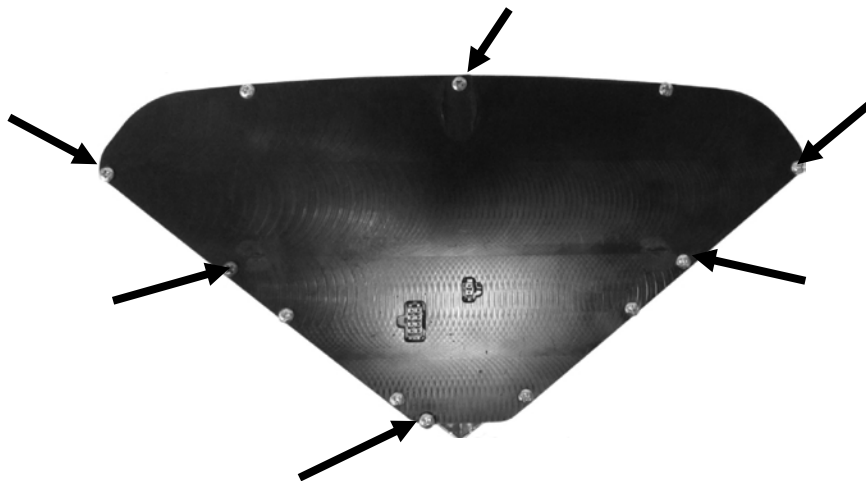

5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

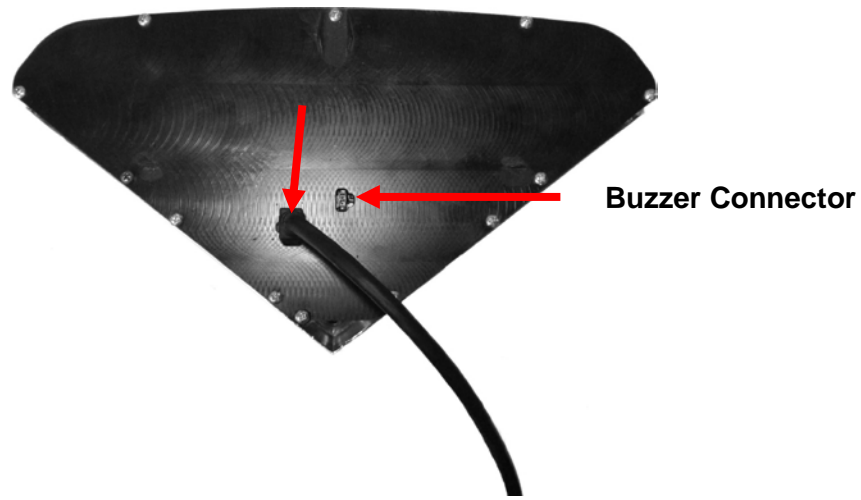

6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the HDX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Phone (605) 332-6513  
Fax (605) 339-4106  
Copyright 2011 - Dakota Digital, Inc.