



# HDX-63C-VET

Dakota Digital HDX Instrument Installation  
For 1963-1967 Chevy Corvette

Your new HDX-63C-VET kit includes:



**HDX Display**


**Universal Sender Pack**

**Buzzer**

**Installation Manuals**



**Block Off Parts**




**Main Harness**

**Control Box**

## Installation


1. Remove the stock gauges from the dash. Remove the ten screws holding the gauges to the bezel on the back of the system

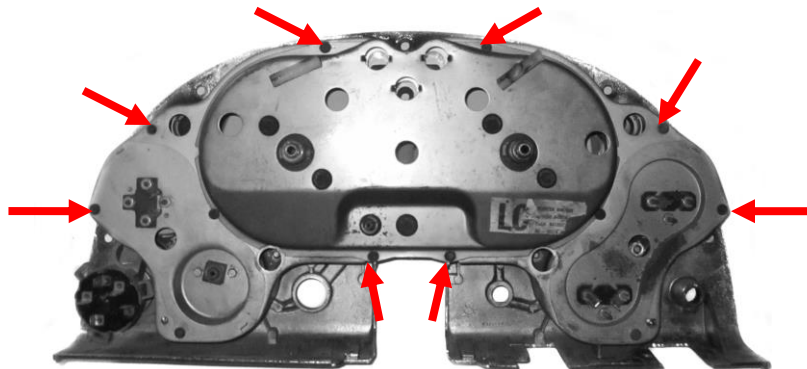

2. Remove the stock gauges. To remove the lens separator plate, remove the nuts. The only item to be reused is the original front bezel; the other pieces can be set aside.




3. With the lenses and lens separator removed, place the included block off parts in the appropriate spaces. Use RTV silicone to secure the block off pieces in place. NOTE: Make sure the smooth side of the plastic with the part number is facing you when installing.

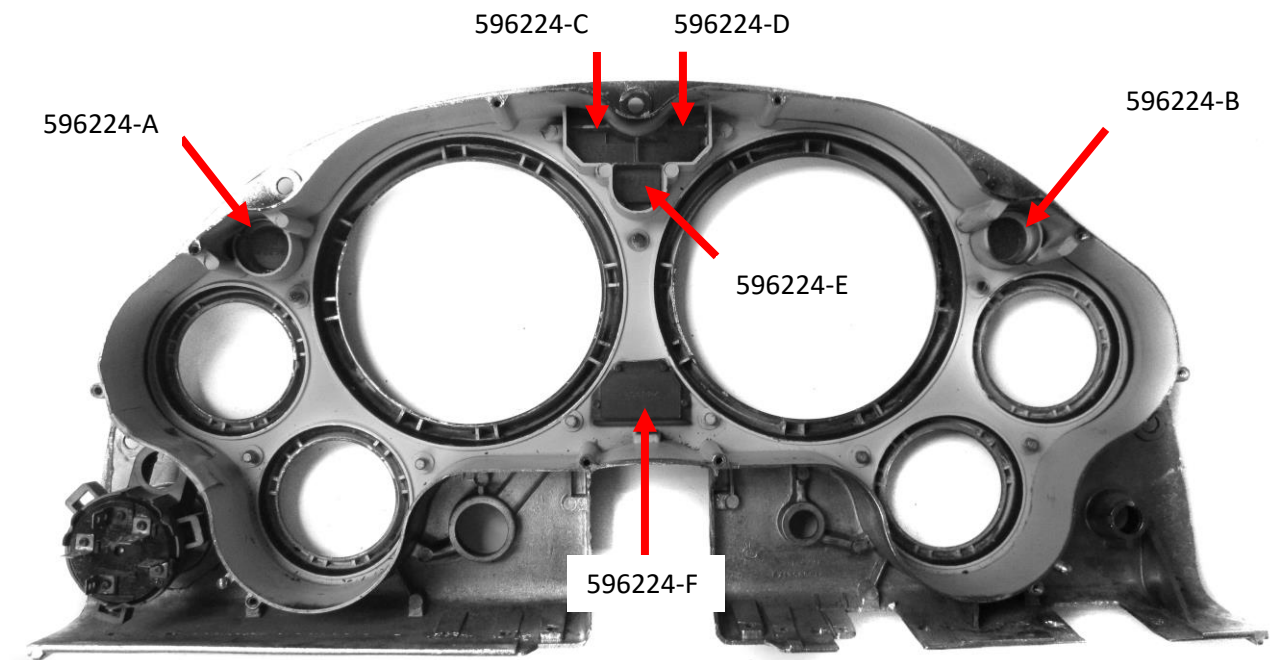


4. Using the 10 factory screws from Step One, secure the HDX gauge assembly to the bezel.

Note: Holes used below (indicated with black arrows) may differ by bezel year.

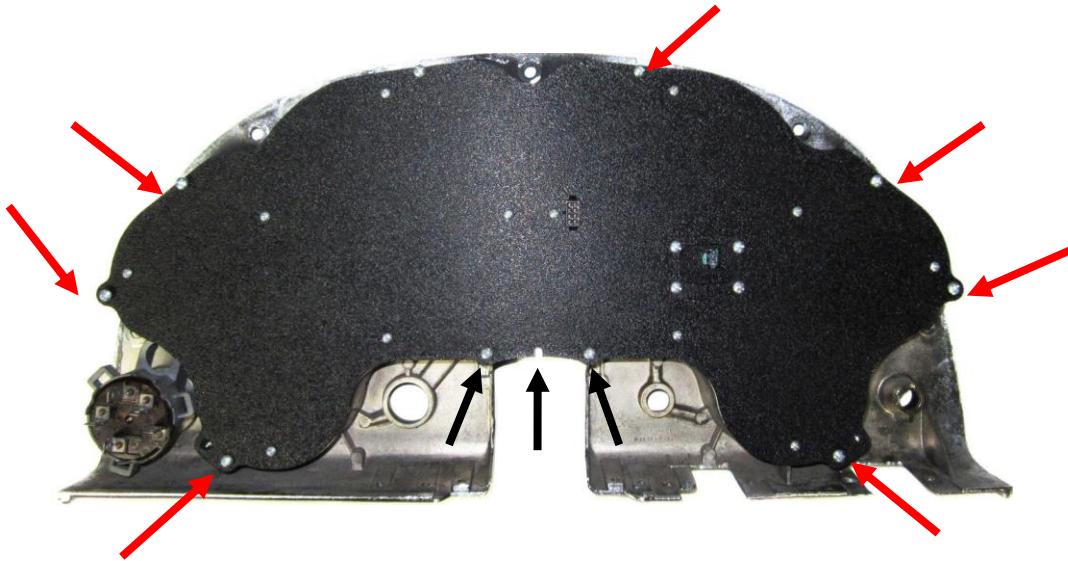

5. Connect the provided harness and the buzzer (optional for audio feedback) to the back of the HDX system.

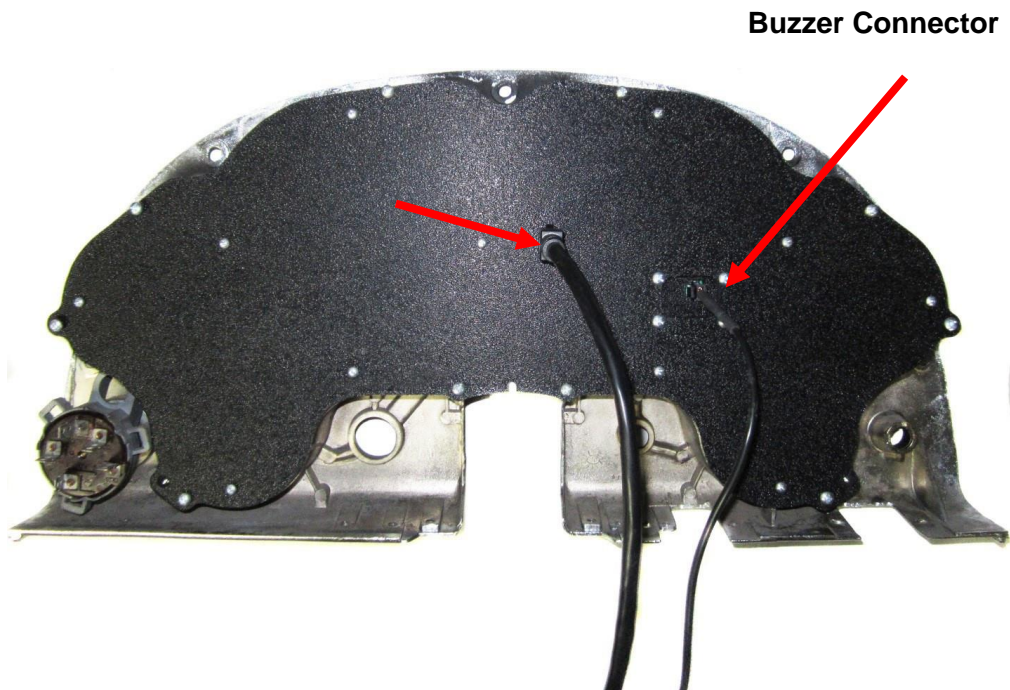

6. Re-install the cluster into the truck and refer to the main manual for wiring instructions to complete the HDX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2017 - Dakota Digital

Manual # 650627B