



HDX-780-CUT

Dakota Digital HDX Instrument Installation
For 1978-'88 Oldsmobile Cutlass

Your new HDX-780-CUT kit includes:

HDX Display



Buzzer




Universal Sender Pack



Installation Manuals




Main Harness

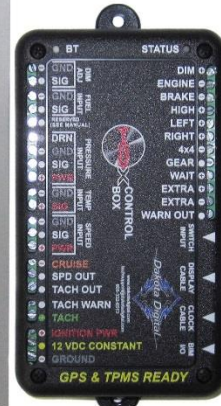


Control Box

Installation

1. First, remove the dash cover to access the stock gauge cluster. There are four (4) screws on the bottom side of the dash cover to be removed. Retain the factory screws for reassembly. Also remove the black plastic spacer in the gauge opening by removing the six (6) screws on the backside of the dash cover.

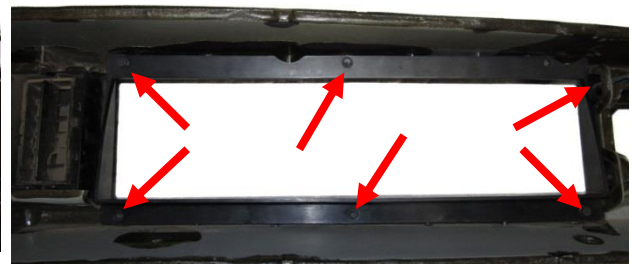


2. Remove the four (4) screws that mount the stock gauge cluster while retaining the hardware for reassembly, also disconnect the wiring harnesses, shift indicator cable, and speedometer cable to completely remove the gauge cluster. Make sure the harness is pushed back as to not interfere with the HDX mounting.

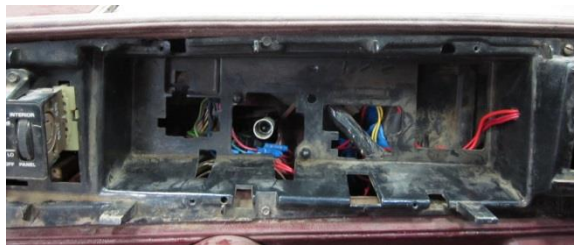

3. Connect the provided Main harness and buzzer (optional for audio feedback) to the back of the HDX system.

Main Harness
Buzzer Harness

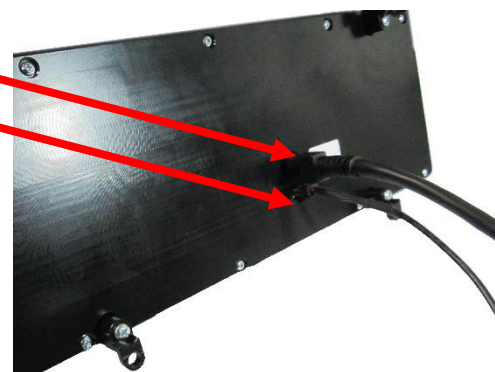

4. Secure the HDX system into the dash using the four (4) stock mounting screws.

5. You are now done mounting the HDX system; re-install the dash cover and refer to the main manual for wiring instructions to complete the HDX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2019 - Dakota Digital