



# HDX-84B-REG

Dakota Digital HDX Instrument Installation  
For 1984-'87 Buick Regal

Your new HDX-84B-REG kit includes:

HDX Display



Buzzer



Installation Manuals



Universal Sender Pack



Main Harness



Control Box

Alternator Load Harness




## Installation

1. Remove the gauge bezel from the dash. Now is a good time to clean the bezel.



\*The bezel is held in by push-in clips. Note the locations of the clips on the back side of the bezel. Pull near clips when removing the bezel.

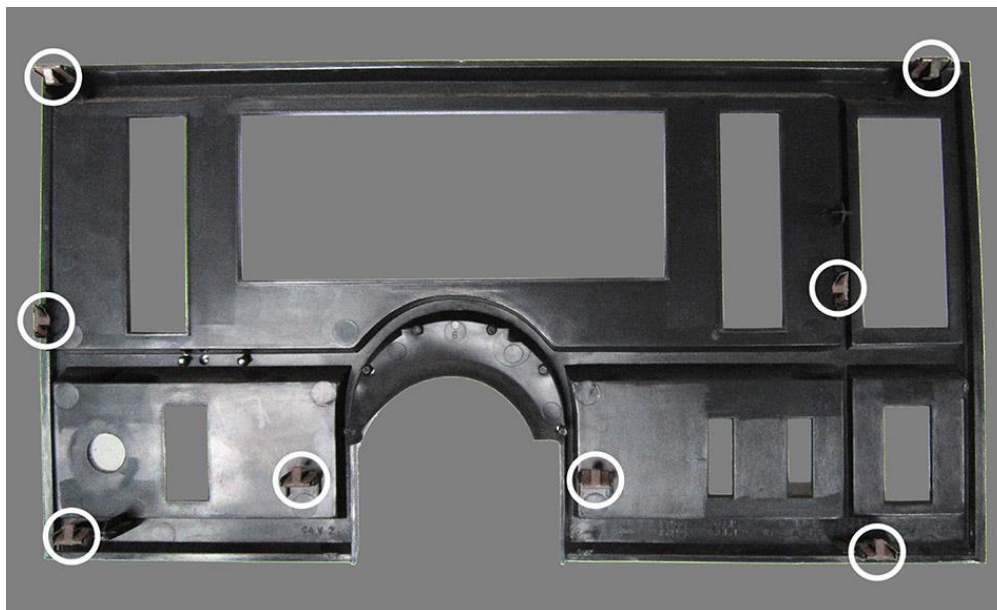

2. Remove the stock gauges by removing the four screws securing the gauges to the dash. A 7mm nut driver will work best for these screws. Keep the screws because they will be used to install the HDX gauges.




3. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the HDX system. Then route the other end of the main harness to the control box.



4. Install the HDX system into the dash. Align the four mounting holes and re-use the factory screws to fasten the HDX gauges into the dash.



5. Re-install the gauge bezel and refer to the main manual for wiring instructions to complete the HDX installation.

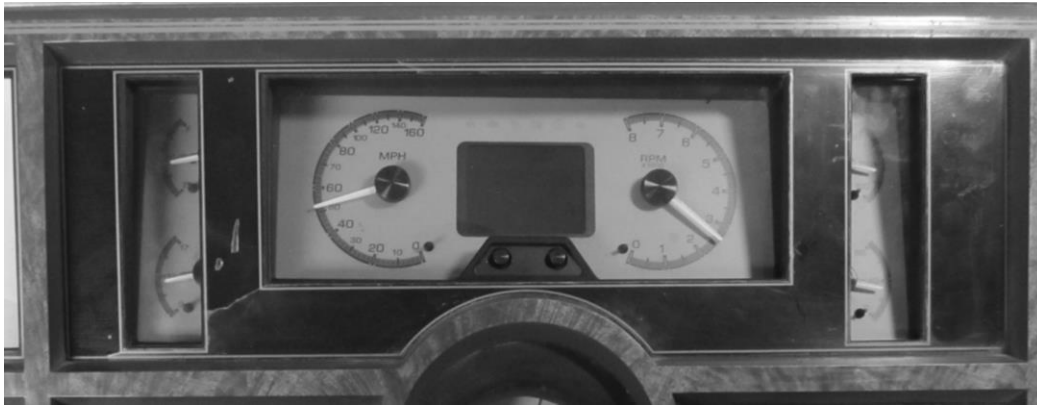

6. Stock charging systems will need an additional wiring connection at the gauge cluster connector. You will need to add a 300 to 500 ohm resistor between pin 3 (Brown wire) and Pin 15 (Pink/Black wire). The provided alternator load harness can be used to achieve this.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2019 - Dakota Digital