


HLC-55C

Dakota Digital Clock Installation
For 1955-'56 Chevy Speaker Clocks


HLC-55C Includes:

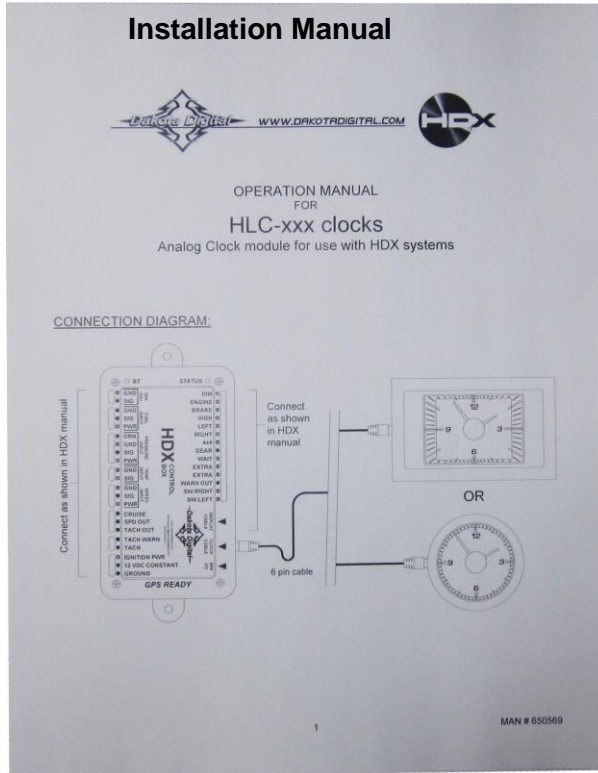

HLC Clock



Clamping Back Plate



Harness




4X 4-24 x 5/8" Mounting Screws



Installation

1. Remove the speaker bezel from the car and place the HLC clock in the speaker bezel from the front. Place the clamping back plate over the rear of the HLC, and secure the clock using the four supplied screws.

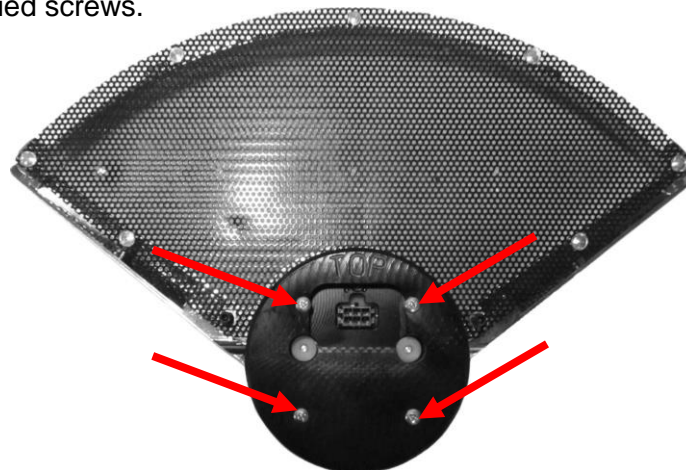

2. Connect the supplied harness to the clock. Route the other end to the control box.



3. Reinstall the speaker bezel in to the dash and refer to the Operation Manual to complete the clock setup.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.