




## HLC-69F-MUS

Dakota Digital HLC Clock Installation  
For 1969-70 Ford Mustang

Your new HLC-69F-MUS kit includes:

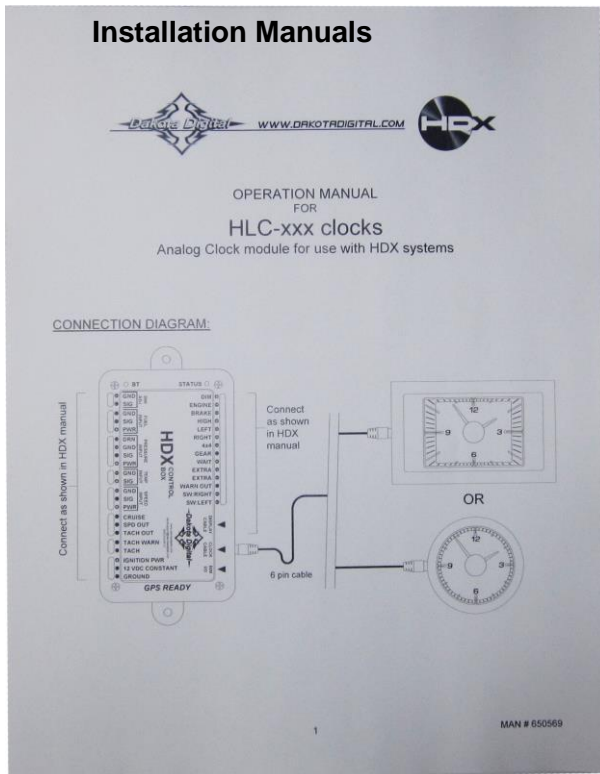

HLC Clock



Harness




2X 3/8" Screws



## Installation


1. Remove the eight (8) screws securing the clock panel to the dash.

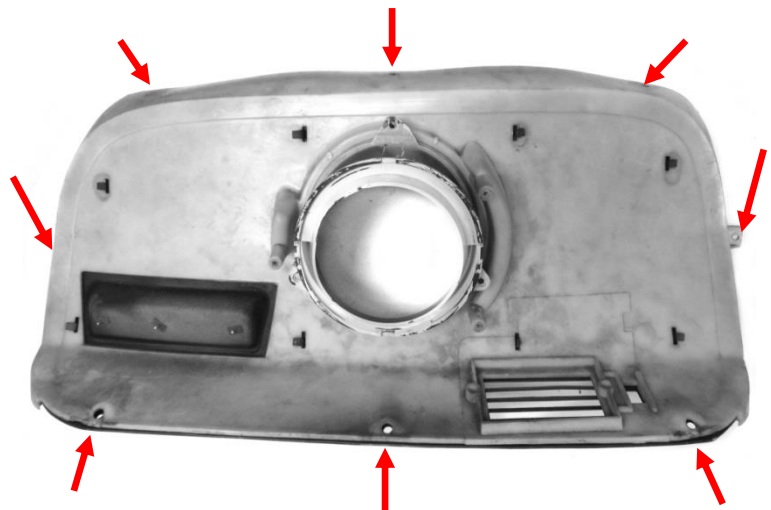


2. Remove the gauge, bezel spacer, and lens from the clock panel.




3. Using the supplied 6-32 x 3/8" screws, attach the factory spacer to the stand-offs.

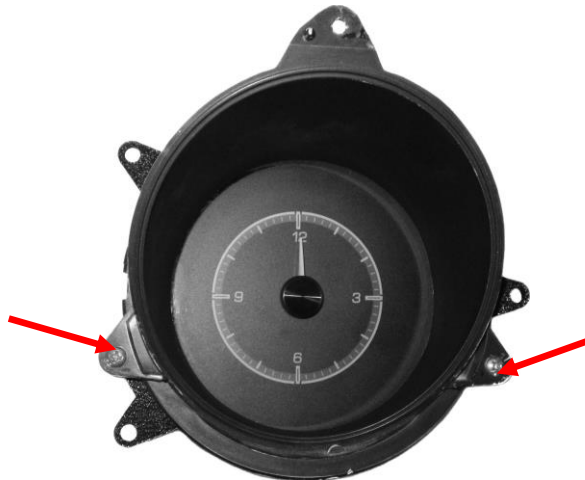

4. Attach the clock to the clock panel using the three factory screws from disassembly.

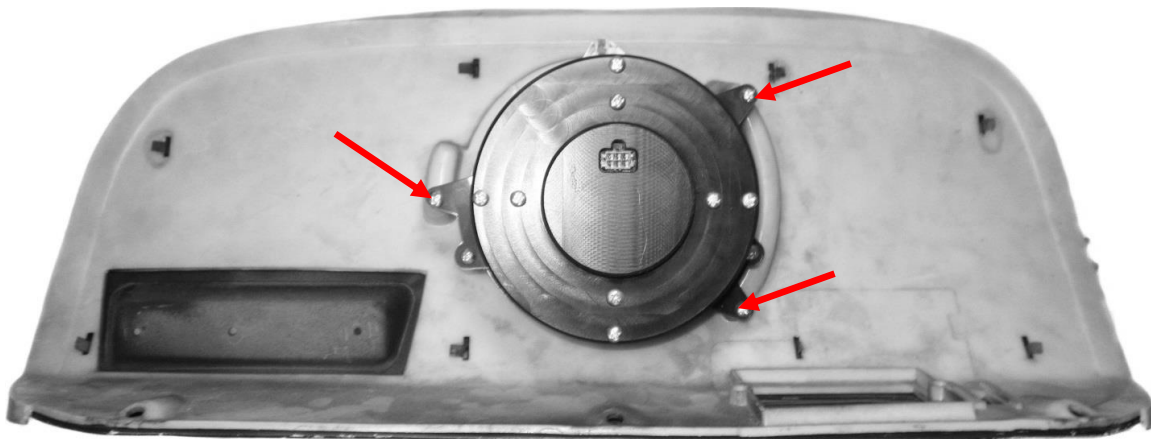

5. Connect the clock harness to the back of the clock. Route the other end of this harness to the HDX control box.

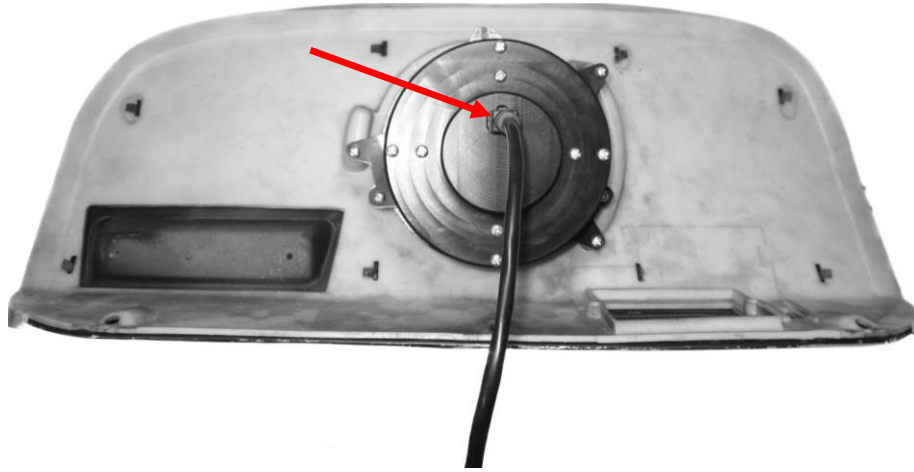

6. Reinstall the assembly in to the dash and refer to the Operation Manual to complete the clock setup.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.