



**This gauge must be used in conjunction with the MVX-8204 Speedometer and Tachometer, it will not function on its own.**

If you are using the MVX-8K-B (Boost), or MVX-8K-A (Air Pressure) gauge, you must also have the correct MBM module to activate the feature.

## MVX Individual Gauge Mounting

### KIT INCLUDES:

MVX Gauge



WIRE TIES (x3)




NUTS (x3)




### INSTALLATION:

Remove the outer fairing and the gauge you wish to replace; this will vary by model, please follow the service manual to expose the wiring and gauges. Don't be alarmed by the amount of wires behind the fairing, this is a direct plug in kit and these detailed instructions will guide you through installation.

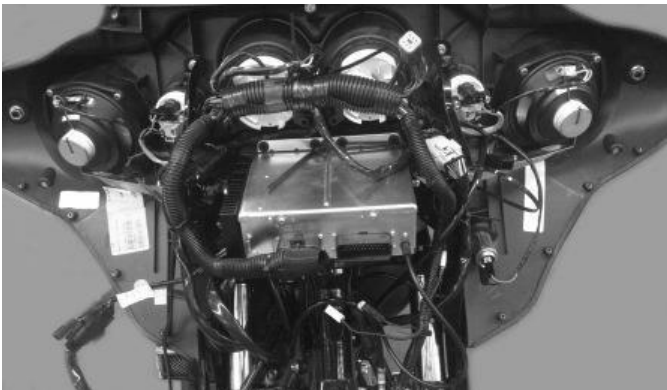

With the switch harness connector at the top, slide the gauge into the fairing with the two studs sliding through the holes of the stock mounting basket. Use the provided nuts to secure the gauge to the mounting basket. One extra nut is provided in case one is lost.

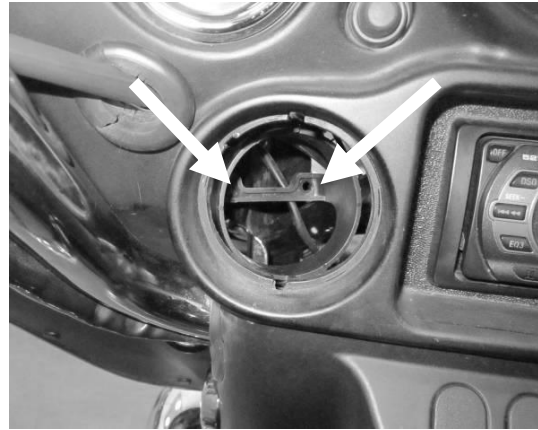

Use the provided zip ties to secure existing wiring and/or an interconnect harness that may come with the MVX gauge. Refer to the main manual for connections and setup. Check for even orientation with the rest of the gauges before reassembly.

**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2013 – Dakota Digital, Inc.