



# RTX-42F

Dakota Digital RTX Instrument Installation  
For 1942-'48 Ford Car

Your new RTX-42F kit includes:

RTX Displays




Buzzer

Installation Manuals

Switch Assembly

Universal Sender Pack

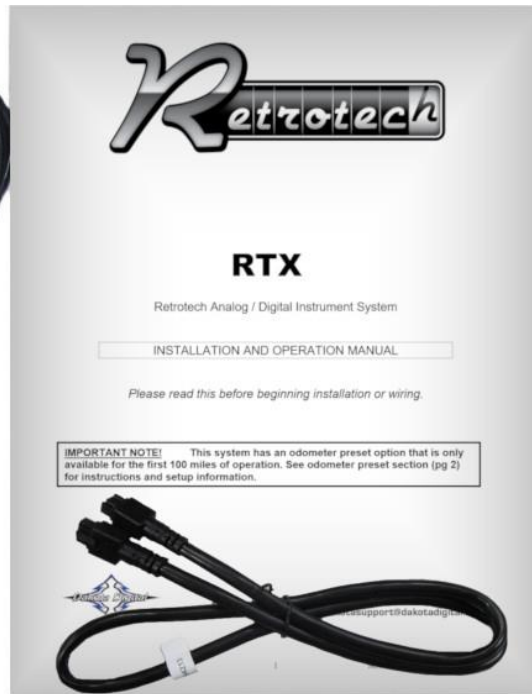

Main Harness



Control Box



Interconnect  
Harness




Ford Sender Adaptor

## Installation


1. Remove the original gauges from the back side of the dash, retaining the original mounting hardware for RTX display installation.



2. Insert the two new RTX displays into the dash from behind. Align and center the display faces before using stock hardware to secure the housings to the dash.

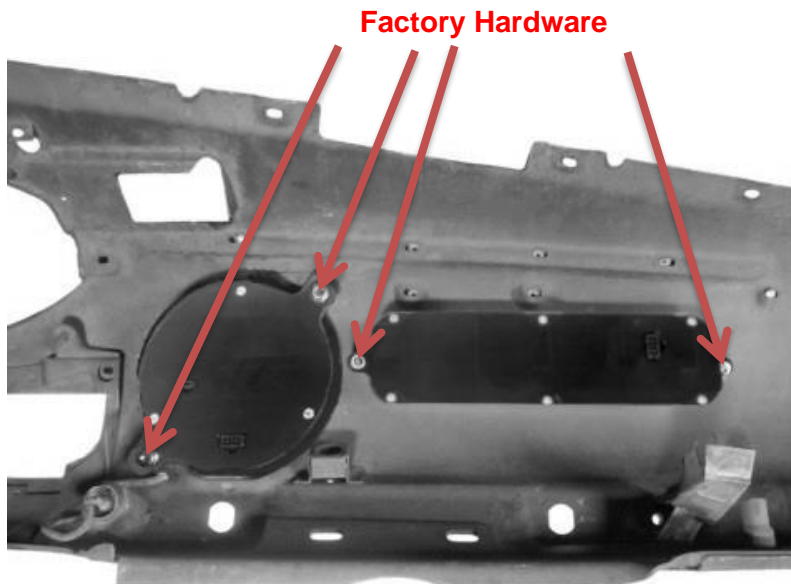

3. Connect the two installed RTX displays with the included interconnect harness, then attach the provided main harness to the interconnect harness. Attach the optional included buzzer cable to the back of the RTX system. Carefully route the other end of the main harness to the control box mounting location.

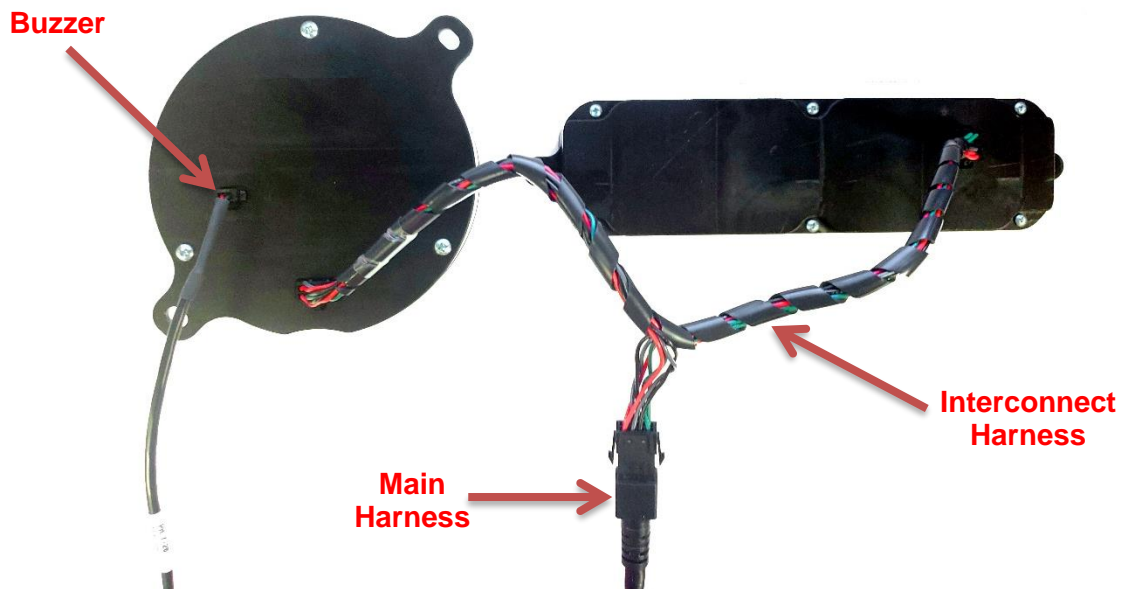

4. Refer to the RTX Main Manual for wiring instructions to complete the RTX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2021 - Dakota Digital