



# RTX-56F-PU

Dakota Digital RTX Instrument Installation  
For 1956 Ford Pickup

Your new RTX-56F-PU kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Main Harness

Switch assembly



Control Box




(5x) 1.25" Screws, Lock Washers, & Mounting Brackets



Ford Speed Adapter

## Installation

1. Remove the stock gauges from the dash. Using plier, pry back the crimped edges of the backing plate.

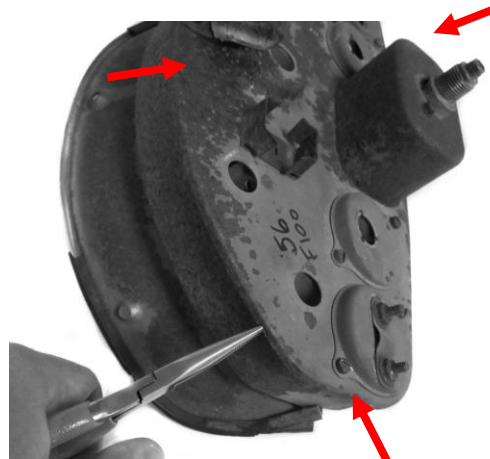


2. Between the shroud and the bezel located on the top hemisphere of the bezel, there are several tabs securing the speedometer to the bezel. Using a plier, bend the tabs straight so the speedometer can be removed.



3. Using a pliers once again, bend the metal tab back and forth until it snaps off.  
NOTE: Some bezels don't have this tab.



5. Place the Dakota Digital gauge into the factory bezel; using the supplied mounting brackets, attach the smaller end of the clip underneath the lip of the factory dash and secure the RTX system to the bezel with the supplied screws and lock washers.

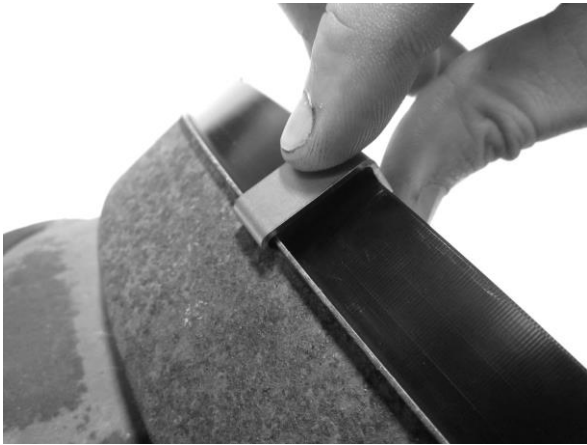

5. Connect the provided main harness and the buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of the main harness to the control box.



6. Re-install the cluster into the vehicle and refer to the main manual for wiring instructions to complete the RTX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital