



# RTX-59C-IMP

Dakota Digital RTX Instrument Installation  
For 1959-'60 Chevy Full Size Car

Your new RTX-59C-IMP kit includes:

RTX Display



Universal Sender Pack



Buzzer




Installation Manuals



Main Harness

Switch Assembly

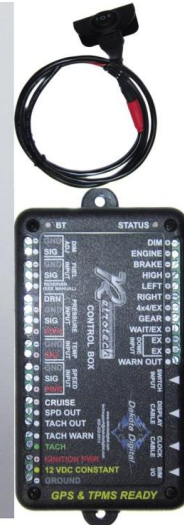

Control Box

(3) 8-32 Nuts



(2) 8-32 1/2" Screws



(1) 8-32 3/4" Screw



(1) 8-32 1" Screw



(3) 8-32 Studs



Interconnect Harness




## Installation

1. Remove the stock instrument cluster from the car and remove the stock gauges from the back of the housing.




2. With the stock housing lying face down, thread in the three (3) supplied 8-32 studs into the main gauge mounting bosses.

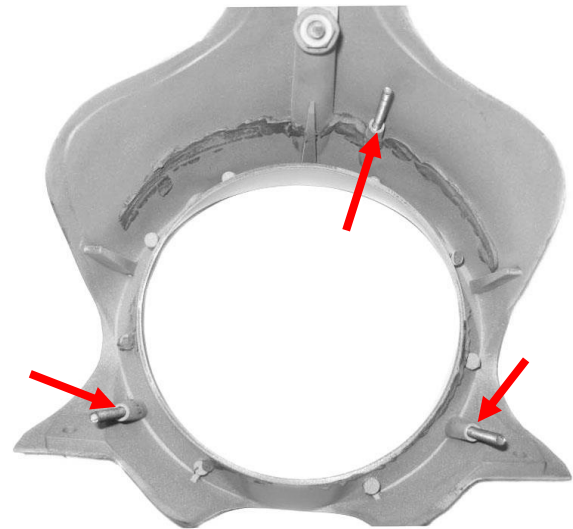


3. Mount the main gauge to the stock housing using the three (3) supplied nuts.

4. Mount the auxiliary gauges to stock bezels using the indicated supplied screws.

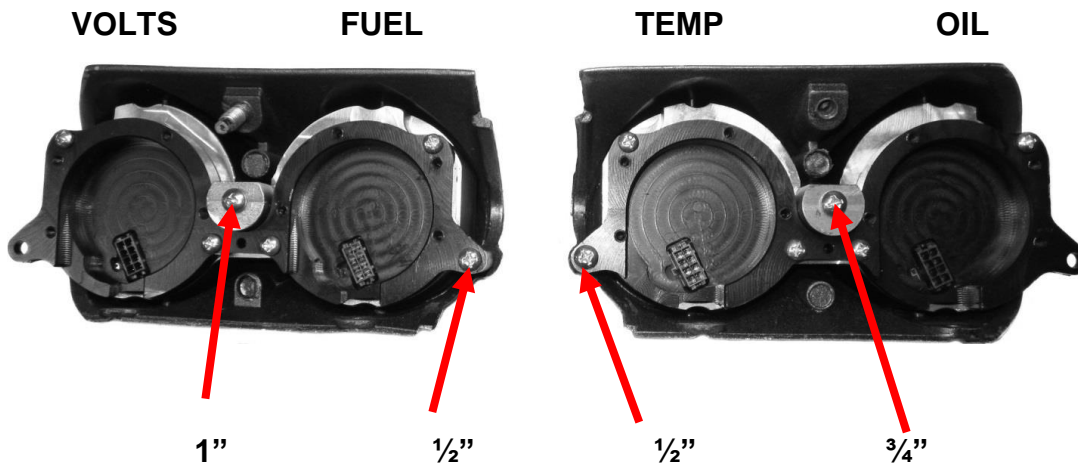

5. Connect the provided Interconnect harness to the back of the RTX system. Then connect the Main Harness to the interconnect harness and the Buzzer (optional for audio feedback) to the back of the RTX system

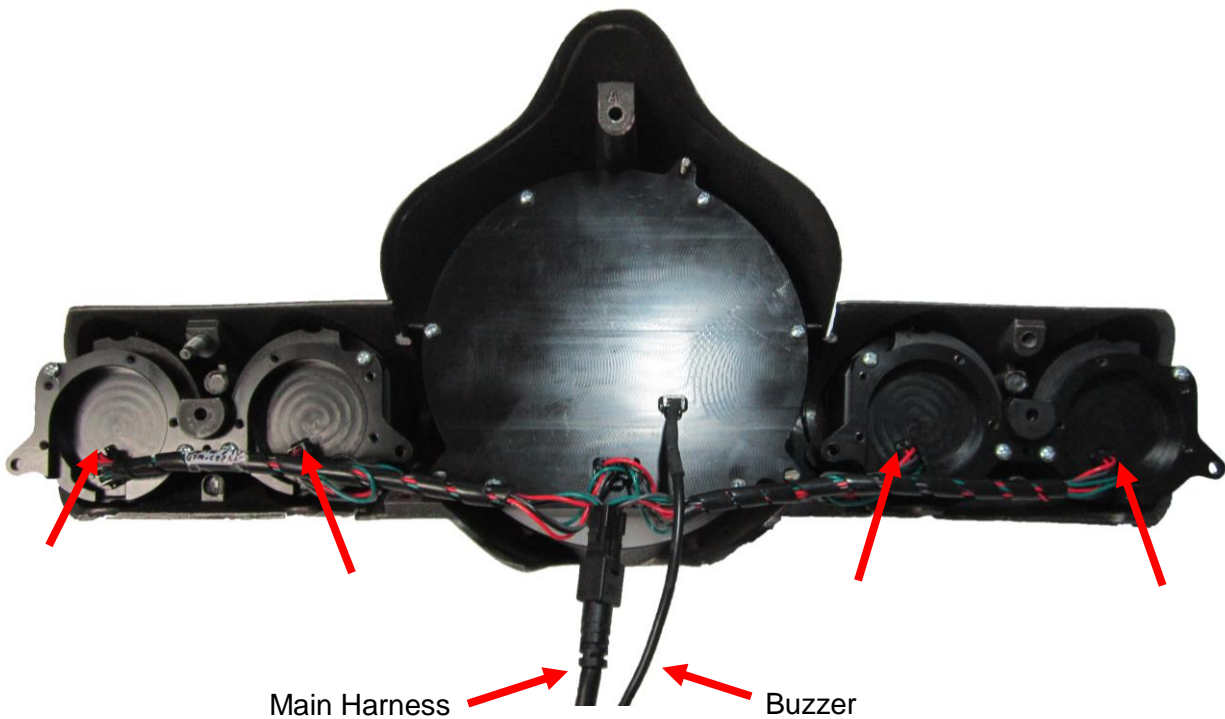

6. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



**⚠WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2019 - Dakota Digital