



RTX-64P-GTO

Dakota Digital RTX Instrument Installation
For 1964-'67 GTO/Lemans/Temptest

Your new RTX-64P-GTO kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Main Harness

Switch Assembly



Control Box

(3) 1/2" Pan Head Screws
(3) 1/2" Flat Head Screws



(3) Block Off Lenses




Installation


1. Remove the stock gauge cluster from the dash and save all hardware for reassembly.




2. Remove the stock gauges, separator plate, and lens from the bezel. The only item to be reused is the original front bezel; the other pieces can be discarded. Now is a good time to clean or refinish the bezel.

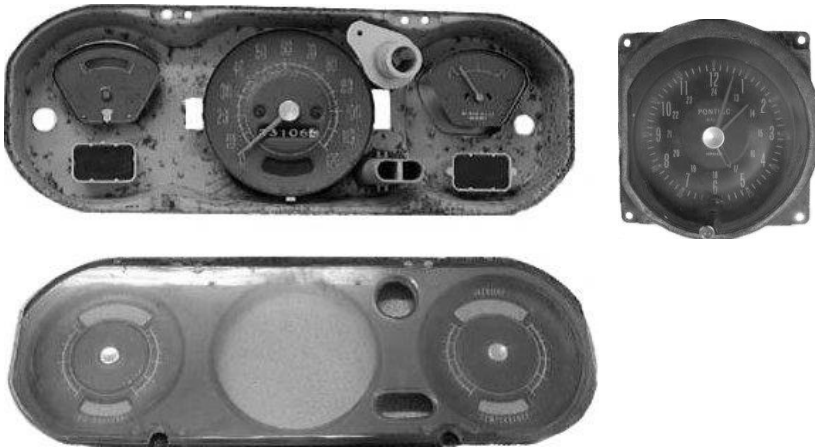


3. Peel the paper off the two block off lenses that match the bezel and, on the back of the housing, place them shiny side down in the two indicator openings in the center. Use silicone to hold them in place and avoid handling until the block off lenses are secure.

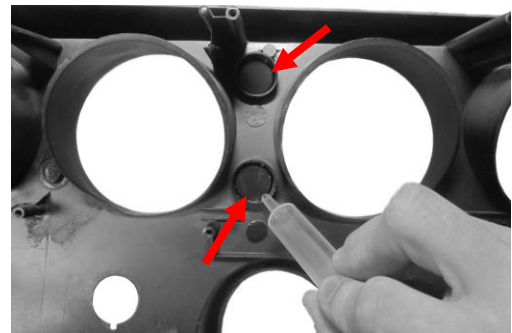

4. Place the RTX system into the bezel, taking care to align all mounting holes. Secure the three (3) provided countersunk screws on the bottom mounting points; move to the top and secure the three (3) pan head screws.

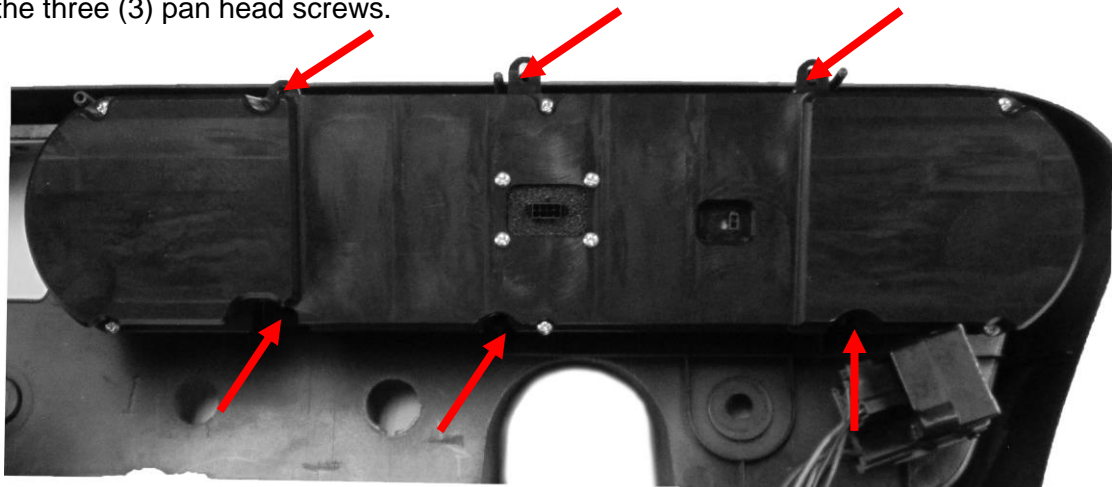

5. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of these cables toward the control box mounting location.

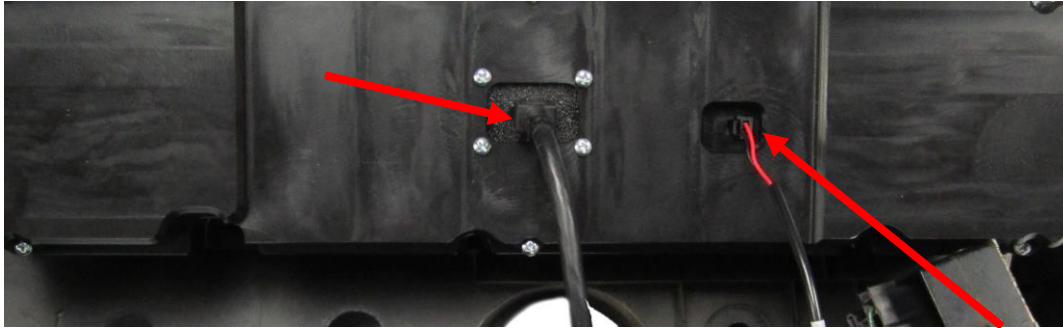

Buzzer Connector

6. Re-install the cluster into the vehicle using stock hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital