



RTX-66C-IMP

Dakota Digital RTX Instrument Installation
For 1966 Chevrolet Impala

Your new RTX-66C-IMP kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Switch Assembly



36" Main Harness


Control Box

Installation


1. First, remove the stock gauge bezel from the dash. Retain the factory hardware for reassembly.



2. Remove the eight screws that mount the stock gauges to the bezel. Retain the stock hardware for reassembly. The stock gauges can be set aside; they will not be reused.

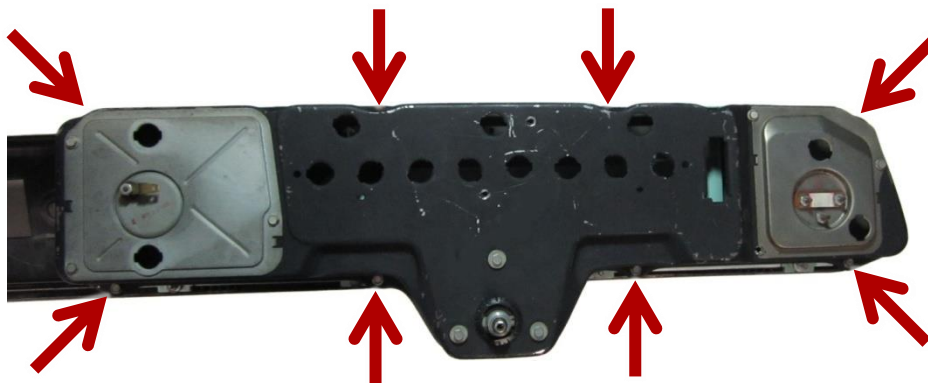


3. The stock clear lens is not needed but can be left in place if desired. To remove the clear lens, loosen the bottom four studs and the lens will slip out. Make sure to re-tighten the studs after removing the lens.

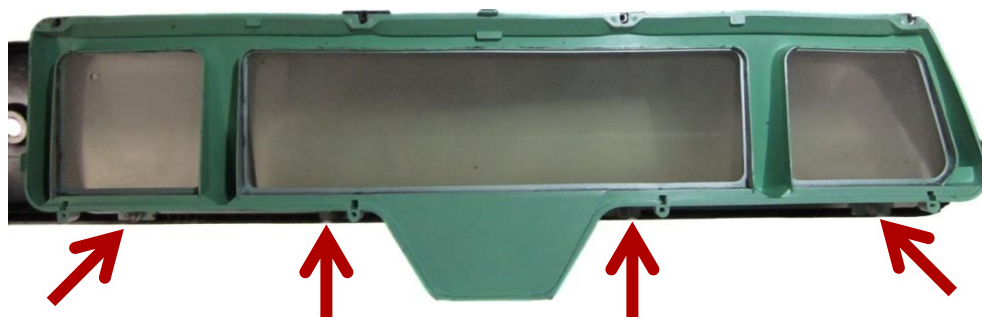

4. Mount the RTX system to the back of the bezel spacer using the stock hardware similarly to how the stock gauges were mounted. Note the longer screws are used for the top portion.



5. Attach the provided **36" Main Harness** and **Buzzer** (for optional audio feedback) to the back of the RTX system as shown in the picture below. Carefully route the open end of the harness to the control box mounting location.

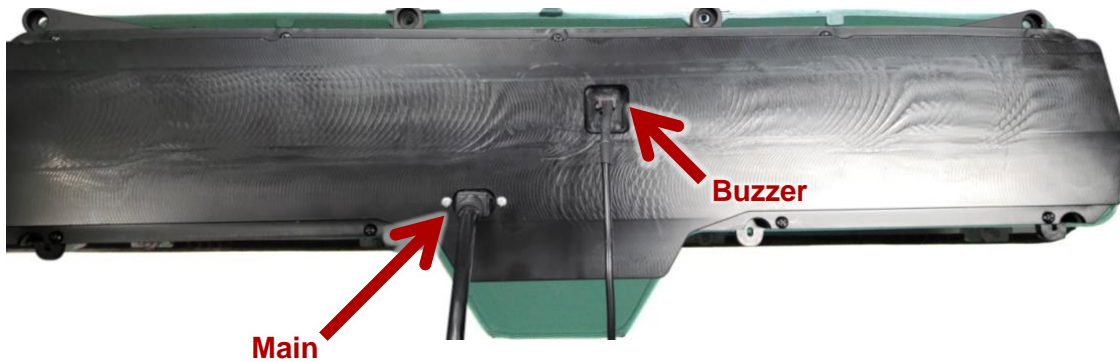

6. Re-install the dash bezel into the car using factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital