



## RTX-67C-IMP

Dakota Digital RTX Instrument Installation  
For 1967 Chevrolet Impala and Caprice

Your new RTX-67C-IMP kit includes:

### RTX Display



### Universal Sender Pack



### Buzzer



### Installation Manuals



### Switch Assembly



72" Clock  
Harness

36" Main Harness

Control Box

## Installation

1. Remove the stock gauge cluster from the dash. Retain all removed factory hardware for reassembly.




2. Remove the bezel from the original gauges. Retain all hardware used for securing the bezel. The factory clear lens can either be removed or left in place if desired.



3. Mount the RTX system to the factory bezel using the retained original fasteners.



4. Attach the provided **36" Main Harness** and **Buzzer** cable (optional for audio feedback) to the back of the RTX system. Also connect the **72" Clock Harness**. Carefully route the opposite ends to the control box and buzzer mounting locations.

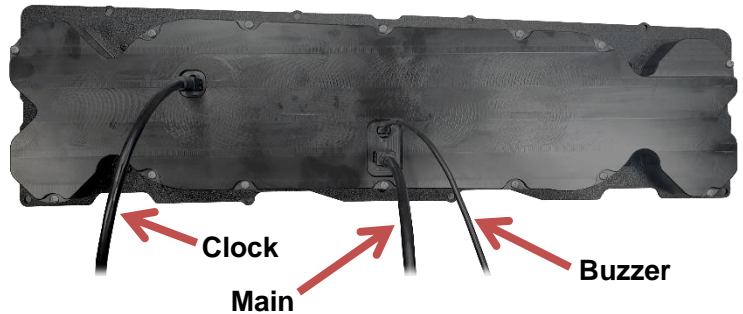

5. Reinstall the assembled system into the dash using factory hardware. Refer to the main RTX manual to complete the installation.



**⚠️WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)  
[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com)

Phone (605) 332-6513  
Fax (605) 339-4106

© Copyright 2024 - Dakota Digital