



RTX-69C-NOV

Dakota Digital RTX Instrument Installation

For 1969-'76 Nova

1973-'75 Buick Apollo

1975-'76 Buick Skylark

1973-'76 Oldsmobile Omega

1971-'76 Pontiac Ventura

Your new RTX-69C-NOV kit includes:

RTX Display



Universal Sender Pack



Buzzer



Installation Manuals



Main Harness

Switch Assembly




Control Box

Installation


1. Remove the stock gauge bezel and cluster from the dash. Retain all hardware for reassembly.




2. Remove the eight (8) screws holding the gauges to the bezel and save the screws for reassembly.

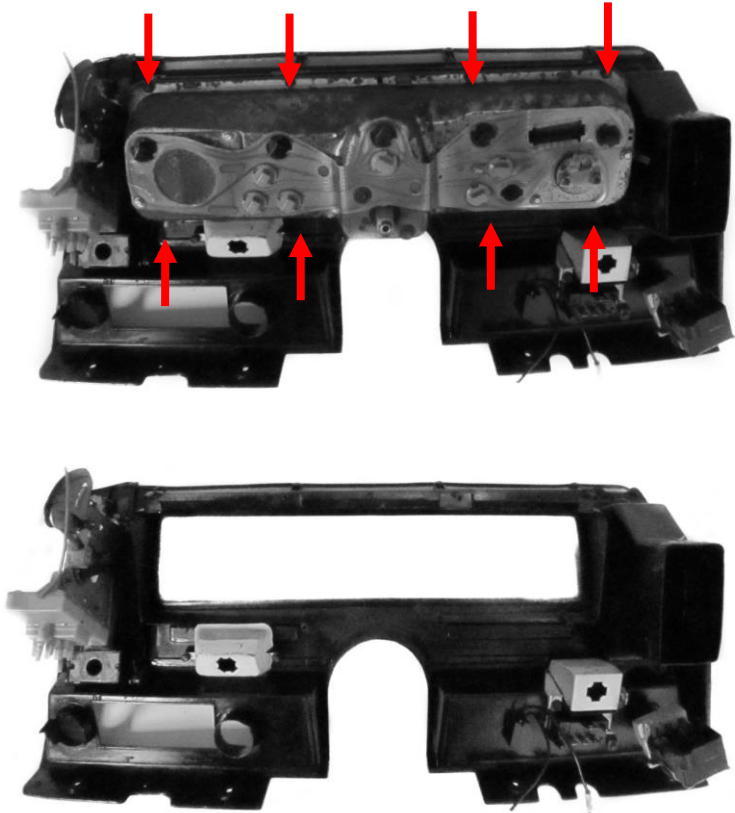

3. Attach the gauge cluster to the bezel using the stock screws from disassembly.

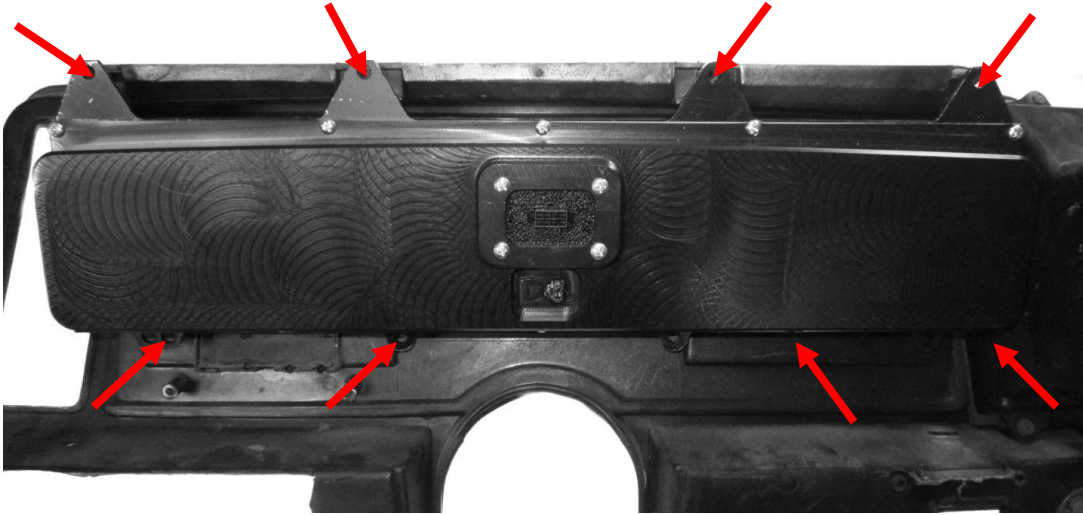

4. Connect the provided Main Harness and the Buzzer (optional for audio feedback) to the back of the RTX system. Route the other end of these cables toward the control box mounting location.

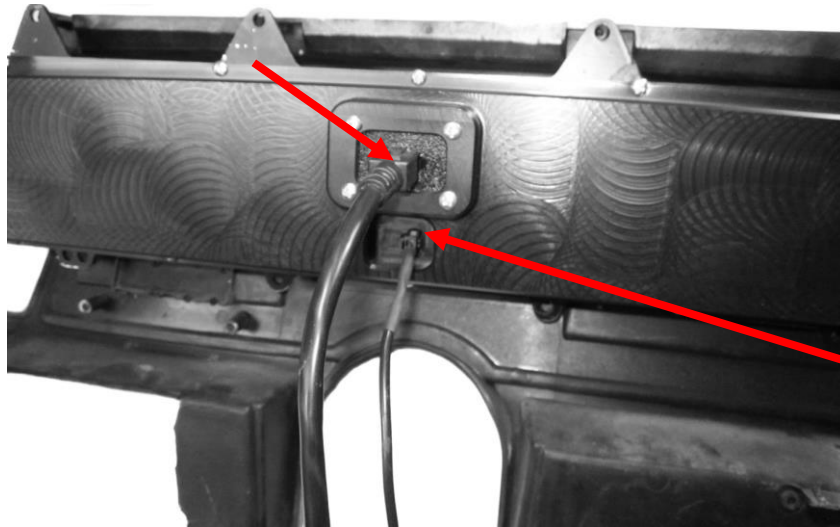

Buzzer Connector

5. Re-install the cluster into the vehicle using the factory hardware and refer to the main manual for wiring instructions to complete the RTX installation.



⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2020 - Dakota Digital