




3-WIRE INDUCTIVE GEAR TOOTH SPEED SENSOR

A bracket will need to be fabricated to mount the inductive sensor securely. The body of the sensor is threaded to allow easy adjustment of the air gap.
The SEN-6019, SEN-2019 and SEN-5019 have mating connectors that plug directly into the gauge.
The SEN-1019 has three wires that are connected as follows:
BLUE - GROUND, BLACK - SPEED SIGNAL, TAN - SENSOR POWER (12V)

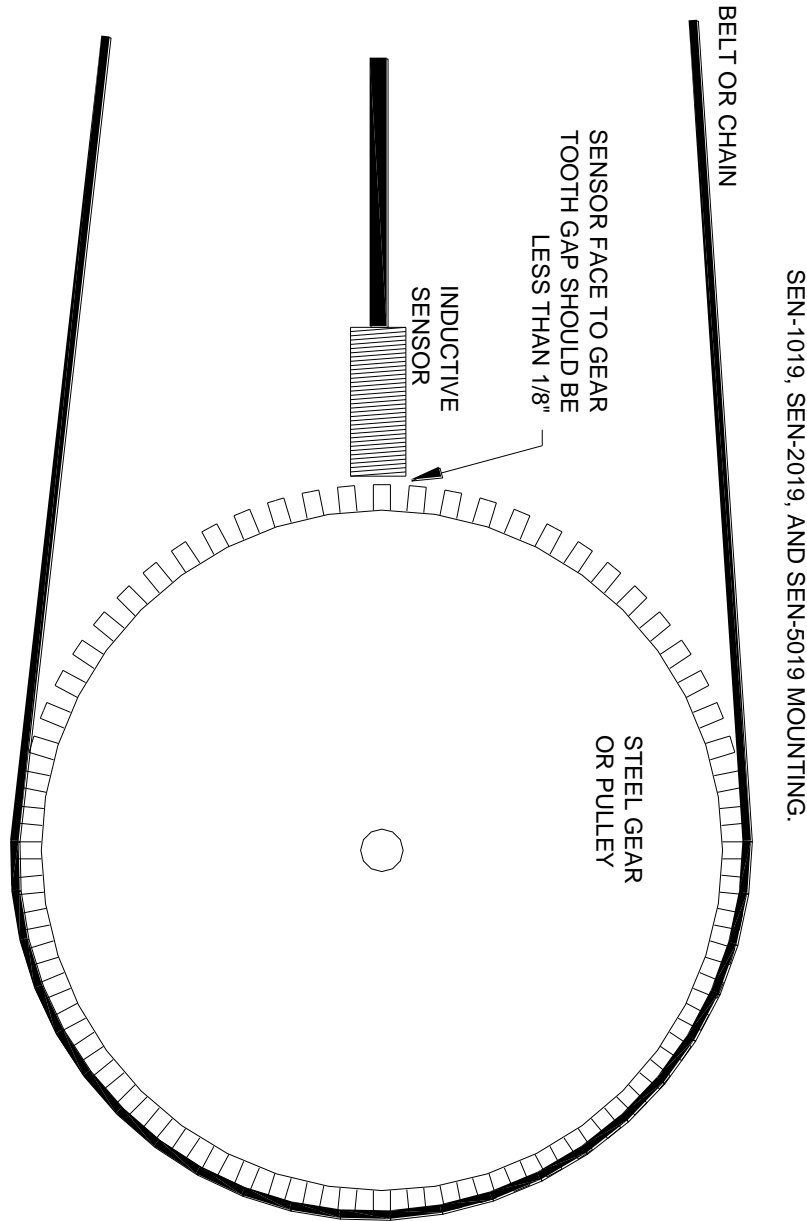

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.

MAN#650032