




3-WIRE INDUCTIVE GEAR TOOTH SPEED SENSOR

The wheels bolt heads must be protruding. Bolt heads cannot be flush, stainless, or chrome otherwise this can cause issues with the sensor.

SEN-1019, SEN-2019, AND SEN-5019 MOUNTING.

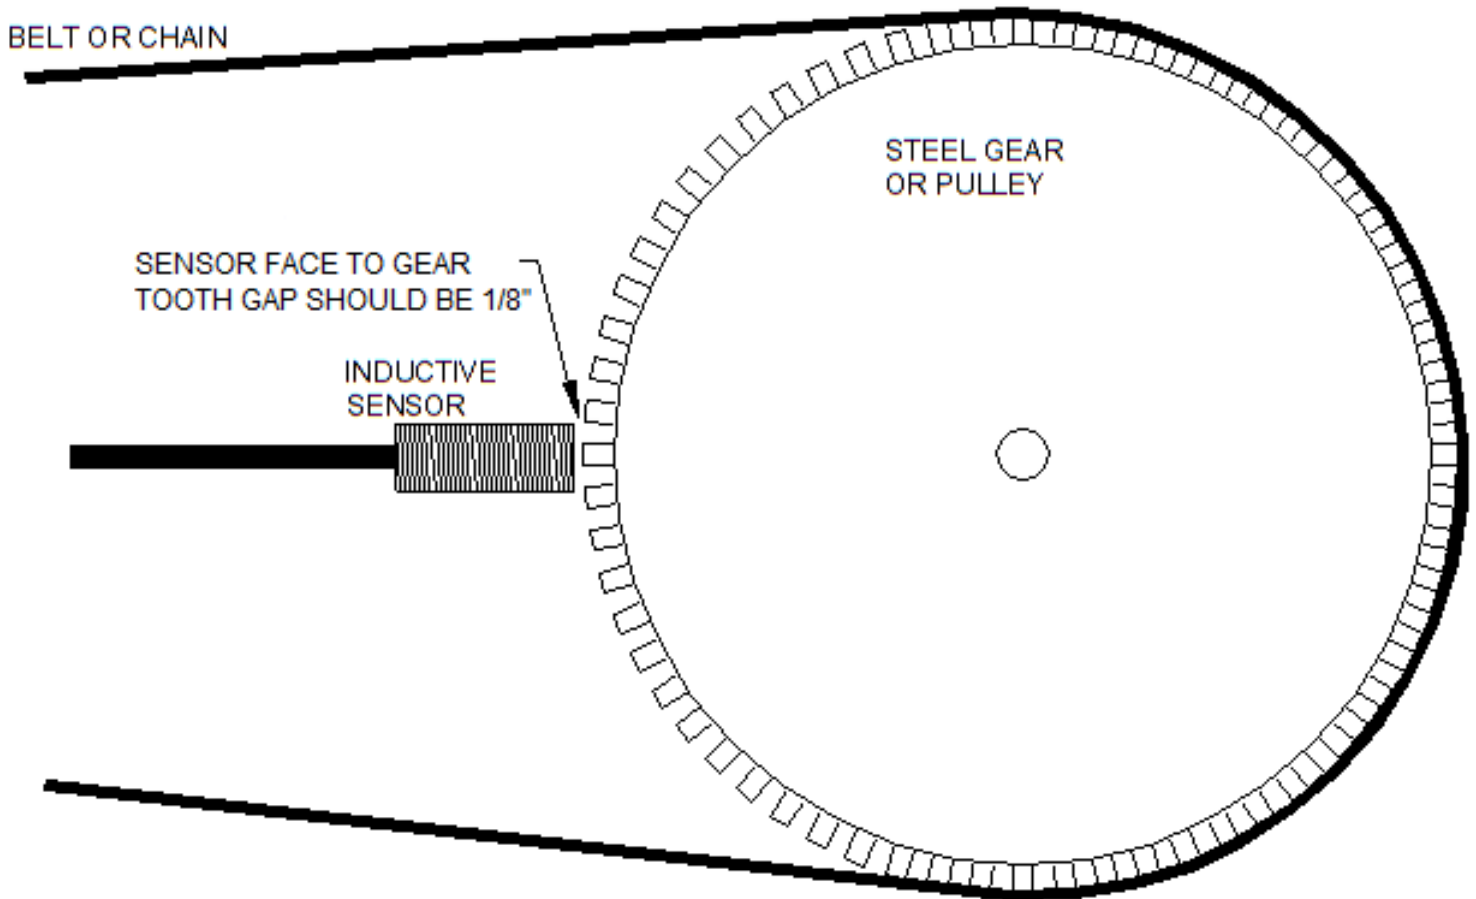

A bracket will need to be fabricated to mount the inductive sensor securely. The body of the sensor is threaded to allow easy adjustment of the air gap. The SEN-6019, SEN-2019 and SEN-5019 have mating connectors that plug directly into the gauge.

The SEN-1019 has three wires that are connected as follows:

BLUE - GROUND, BLACK - SPEED SIGNAL, TAN - SENSOR POWER (12V)

OR BLACK - GROUND, GREEN or WHITE - SPEED SIGNAL, RED - SENSOR POWER (12V)

⚠️WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



4510 W. 61st St. North
Sioux Falls, SD 57107
www.dakotadigital.com
dakotasupport@dakotadigital.com

Phone (605) 332-6513
Fax (605) 339-4106

© Copyright 2023 - Dakota Digital

MAN#650032B