



# VHX-42F

Dakota Digital VHX Instrument Installation  
For 1942-'48 Ford Car

Your new VHX-42F kit includes:

VHX Display



Universal Sender Pack

Installation Manuals



Switch Assembly

CAT5 Cable

Control Box




Ford Sender Adaptor

## Installation


1. Remove the stock gauges from the dash, retain hardware for reassembly.



2. Place the VHX displays into the dash from behind; align and center before using stock hardware to secure the displays to the dash.

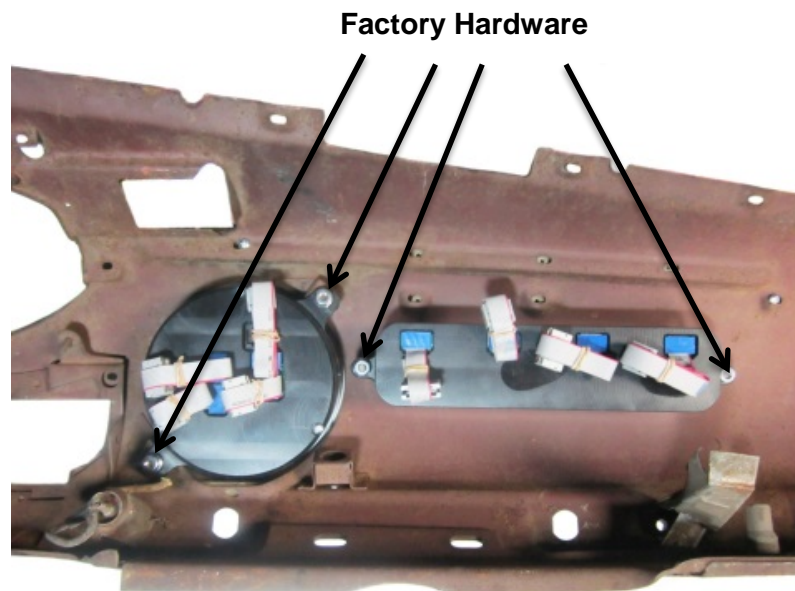

3. Make the proper connections between the four (4) labeled ribbon cables from the Speed/Tach gauge to the lead from each auxiliary gauge. Example; Fuel cable from the main gauge connects to the Fuel auxiliary gauge cable. Also, connect the CAT5 cable to the back of the VHX Speed/Tach gauge shown with the black arrow. Take care when routing the CAT5 cable to the control box mounting location.

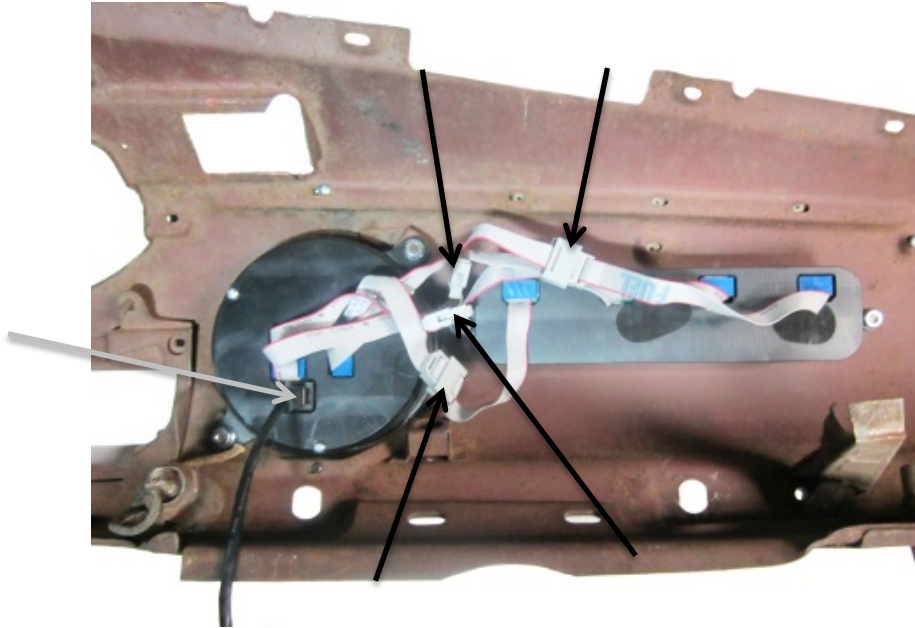

4. Refer to the main manual for wiring instructions to complete the VHX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
www.dakotadigital.com  
dakotasupport@dakotadigital.com

Phone (605) 332-6513  
Fax (605) 339-4106

Copyright 2011 - Dakota Digital, Inc.