



# VHX-60F-GAL

## Dakota Digital VHX Instrument Installation For 1960 Ford Galaxie

Your new VHX-60F-GAL kit includes:

VHX Display



(8) Plastic Retainers

Aluminum Bezel



(2) 1" Screws



(7) 2" Screws

Installation Manuals




(3) 1/4" Screws



Universal Sender Pack

Ford Speed Sender Adapter

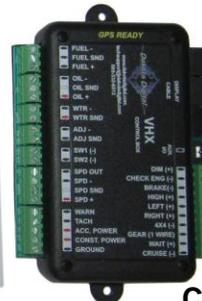

Control Box

CAT5 Cable



(2) Blinker Harness




Switch Harness

### Installation

1. Remove the stock gauge cluster from the dash. Retain all hardware for reassembly.




2. Separate the gauge housings and remove the pieces inside from the bezel so you are left with a bare bezel as shown below.

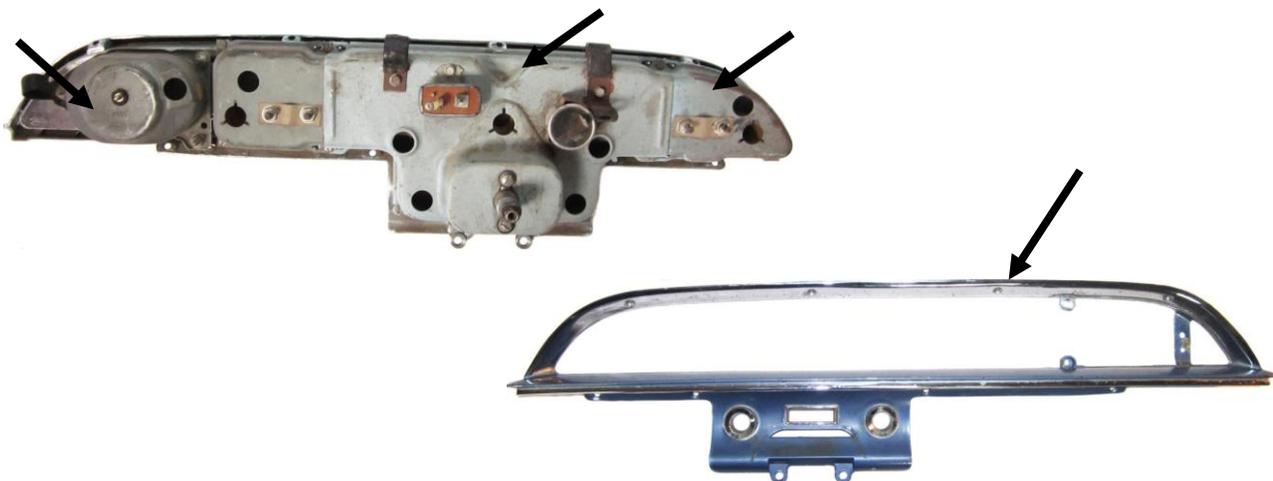

3. Mount the provided aluminum bezel to the stock bezel using the three (3) 1/4" supplied mounting screws.




4. Mount the VHX system to the stock bezel using the seven (7) 2" supplied screws shown in grey arrows and two (2) 1" supplied screws shown in black arrows.

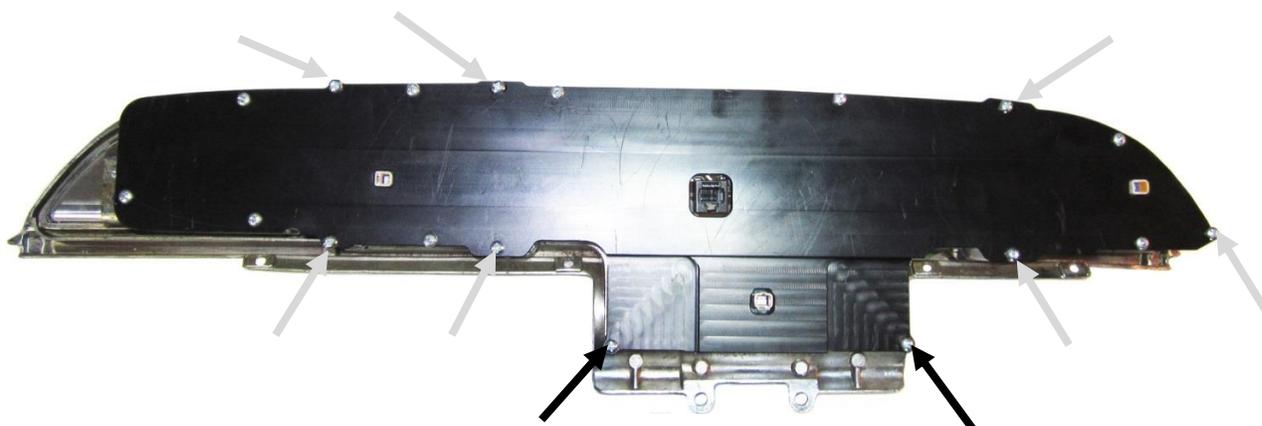


**Grey arrows show 2" screws  
Black arrows show 1" screws**


5. This system comes with the option for the turn signal arrows in your vehicle's stock turn signal locations. Do not wire the turn signals to the VHX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into connectors on the back side of your new VHX system. Connect the wires from these harnesses to your turn signal circuit and ground as shown below. Doing this will light a green LED, located in the original locations of your dash panel, when turn signals are active. Make sure to check left and right to verify they are wired correctly.

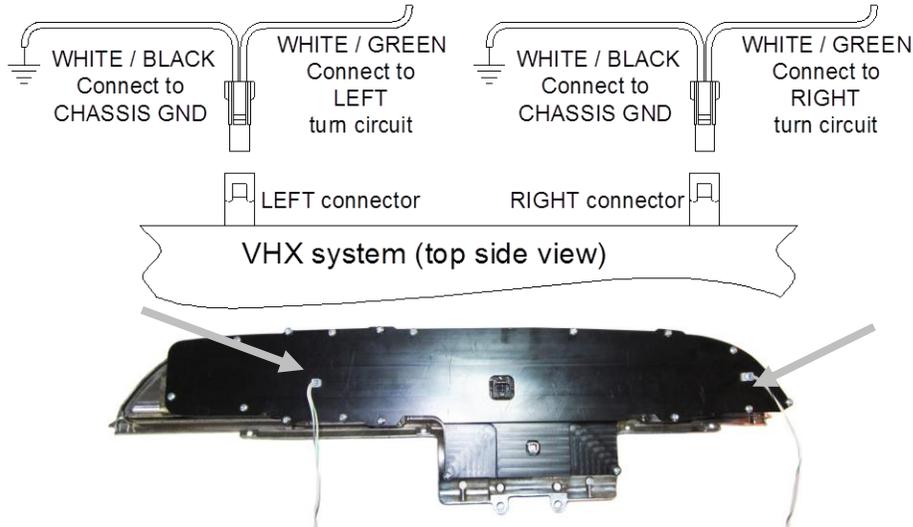

6. This system comes with two switches located directly in the assembly to allow a convenient and easily accessible location for the control switches. To use these switches, the included switch harness needs to be plugged into the back of the assembly and the wires are connected to the VHX control box as follows.

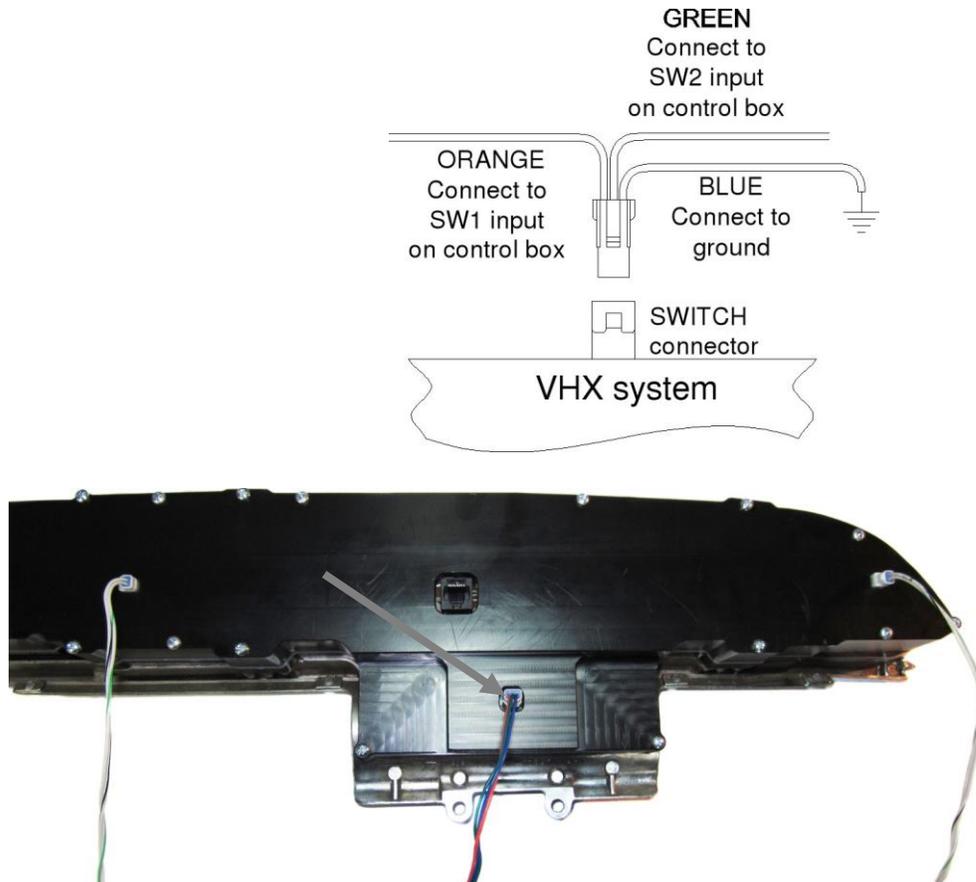

7. Connect the provided CAT5 cable to the rear of the VHX system.

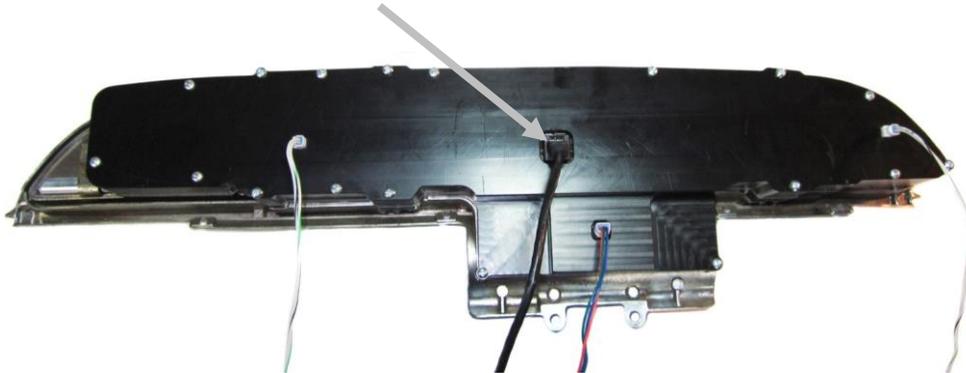

8. The gauge panel is now ready to re-install into the vehicle using factory hardware; take care when routing the CAT5 cable to the control box mounting location. Refer to the main manual to complete the VHX installation.



**⚠ WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)



4510 W. 61st St. North  
Sioux Falls, SD 57107  
[www.dakotadigital.com](http://www.dakotadigital.com)

[dakotasupport@dakotadigital.com](mailto:dakotasupport@dakotadigital.com) Copyright 2011 - Dakota Digital, Inc.

Phone (605) 332-6513  
Fax (605) 339-4106