



VHX-61F-GAL

Dakota Digital VHX Instrument Installation
For 1961 Ford Galaxie, Mercury Monterey, Mercury Meteor 600

Your new VHX-61F-GAL kit includes:

VHX Display



Universal Sender Pack



Switch Assembly


Installation Manuals



CAT5 Cable

- (7) 1 3/4" Screws
- (2) 1" Screws
- 8-32 Nut

(2) Blinker Harness

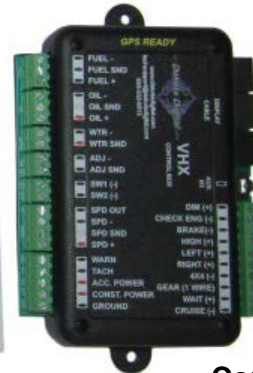

Control Box




Ford Speed Sender

Installation


1. Remove the stock gauge cluster from the dash. Retain all hardware for reassembly.




2. Separate the gauge housings from the bezel so you are left with a bare bezel as shown below.

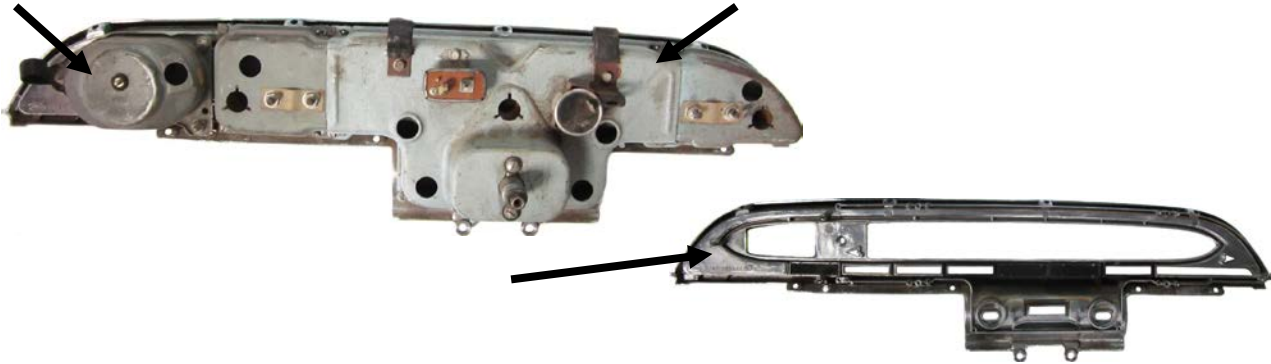

3. Mount the VHX system to the stock bezel using the supplied mounting screws and nut.

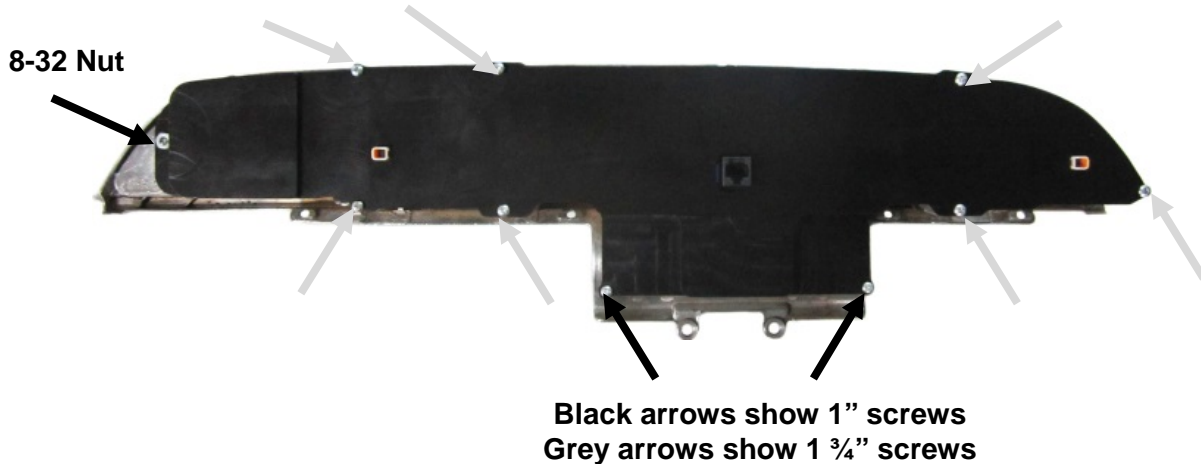

4. This system comes with two options for the turn signal arrows in your vehicle's stock turn signal locations. Do not wire the turn signals to the VHX control box. Instead, use the two provided two-wire harnesses. The harnesses plug directly into connectors on the back side of your new VHX system. Connect the wires from these harnesses to your turn signal circuit and ground as shown below. Doing this will light green LED bulbs, located in the original locations of your dash panel, when turn signals are active. Make sure to check left and right to verify they are wired correctly.

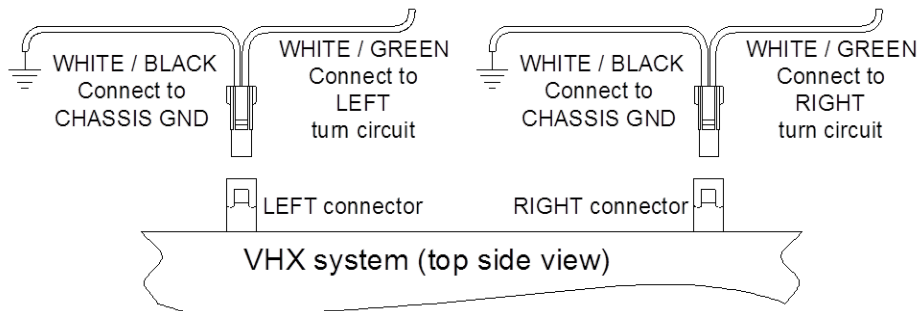

5. Connect the provided CAT5 cable to the rear of the VHX system.



6. The gauge panel is now ready to re-install into the vehicle using factory hardware; take care when routing the CAT5 cable to the control box mounting location. Refer to the main manual to complete the VHX installation.



4510 W. 61st St. N., Sioux Falls SD 57107
Phone: (605) 332-6513 Fax: (605) 339-4106
www.dakotadigital.com
dakotasupport@dakotadigital.com